

BRITISH COLUMBIA
PROSPECTORS ASSISTANCE PROGRAM
MINISTRY OF ENERGY AND MINES
GEOLOGICAL SURVEY BRANCH


PROGRAM YEAR: 1996/1997

REPORT #: PAP 96-5

NAME: R. TIM HENNEBERRY

**Prospector's Grant No.96/97 P8
Fernie Phosphate Project
1996 Exploration Program**

**R.Tim Henneberry, P.Geo.
January 5, 1997**

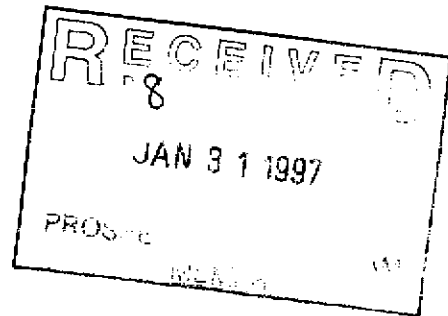

96/97
P8

FERNIE PHOSPHATE PROJECT

1996 PROGRAM

NTS sheets: 82G/02W and 082G/07W
Fort Steele Mining Division

R.Tim Henneberry, P.Geo.
January 5, 1996

**BRITISH COLUMBIA
PROSPECTORS ASSISTANCE PROGRAM
PROSPECTING REPORT FORM (continued)**

B. TECHNICAL REPORT

- One technical report to be completed for each project area.
- Refer to Program Requirements/Regulations, section 15, 16 and 17.
- If work was performed on claims a copy of the applicable assessment report may be submitted in lieu of the supporting data (see section 16) required with this TECHNICAL REPORT.

Name Tim Henneberry Reference Number 96/97 P8

LOCATION/COMMODITIES

Project Area (as listed in Part A) Fernie Basin MINFILE No. if applicable BL+MC 82GSE051
CC 82GSE055
LC 82GSE063

Location of Project Area NTS 82G/02E, 82G/07E Lat 49°07' to 49°27' Long 114°40' to 114°42'

Description of Location and Access Road access from Fernie (CC+LC) or Sparwood (BL+MC)
by main line and secondary logging roads.

Main Commodities Searched For Sedimentary phosphorites (phosphate) with associated yttrium

Known Mineral Occurrences in Project Area Barnes Lake (82GSE051), Cabin Creek (82GSE055), Hunger
Lake (82GSE063) All were acquired by staking during this program.

WORK PERFORMED

1. Conventional Prospecting (area) _____
2. Geological Mapping (hectares/scale) 1:10,000 mapping ± 1000 hectares
3. Geochemical (type and no. of samples) _____
4. Geophysical (type and line km) _____
5. Physical Work (type and amount) _____
6. Drilling (no., holes, size, depth in m, total m) _____
7. Other (specify) _____

SIGNIFICANT RESULTS

Commodities Phosphate, yttrium Claim Name BL, MC, CC, LC

Location (show on map) Lat 49°07' to 49°27' Long 114°40' to 114°42' Elevation 5000 to 6000 feet

Best assay/sample type Reserves 258,000 tons @ 27% P₂O₅ (Barnes); 145,000 tons @ 19.74% P₂O₅
(Cabin); 41,000 tons @ 20.24% P₂O₅ (Hunger)

Description of mineralization, host rocks, anomalies
Mineralization consists of sedimentary phosphorites at base of Jurassic Fernie Formation within
sequence of shales and siltstones. Thrust faulting and folding has produced local thickening
of 31 metre thick phosphorite sequence and has produced areas where dip of slope and
phosphorite is similar. Program of backhoe trenching is required to allow sampling
as the phosphorites are recessive weathering and generally do not outcrop on
properties.

Supporting data must be submitted with this TECHNICAL REPORT

Information on this form is confidential for one year from the date of receipt subject to the provisions of the Freedom of Information Act.

14°45'00"
9°30'00"

665280

671616

DOM GOVT
BLOCK

ROCK
Interprovincial
MOUNT DARRA

5480640



Flathead Pass

Squaw Creek

MC #1-#6
BL #1-#12

82607E
1:50,000Z

Boundary


CENTRE M

ROCK

MOUNT DARRA

CENTRE M


A

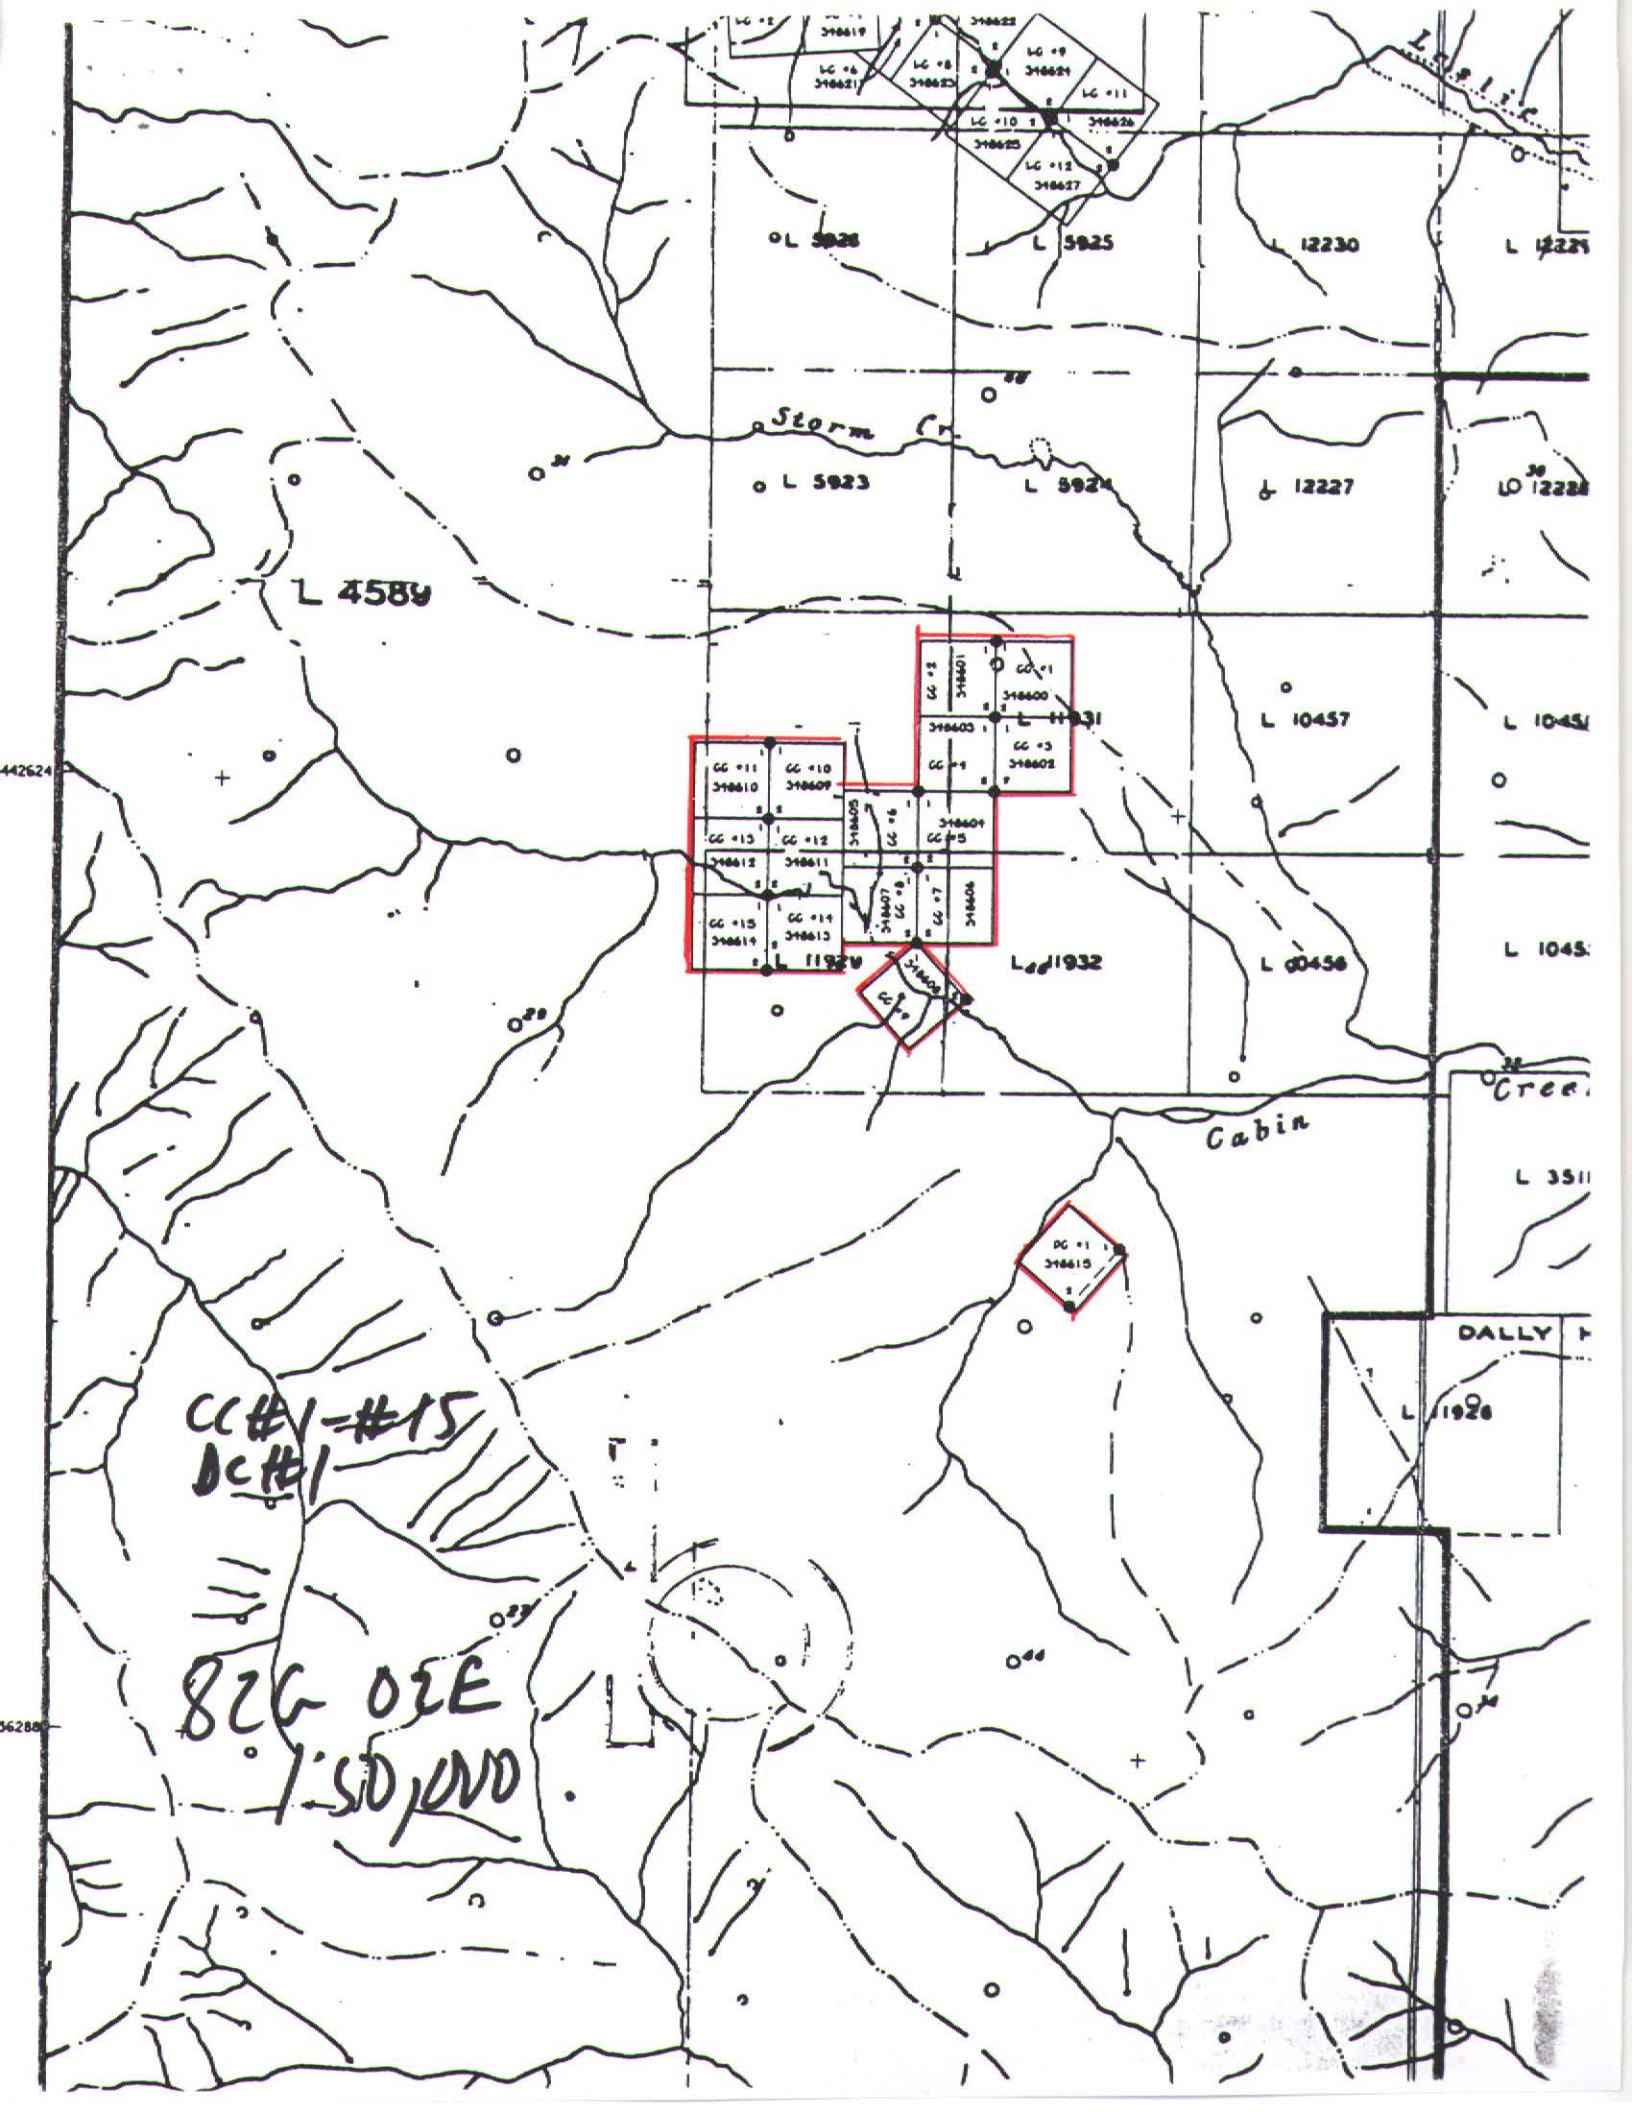

48960

42624

436288

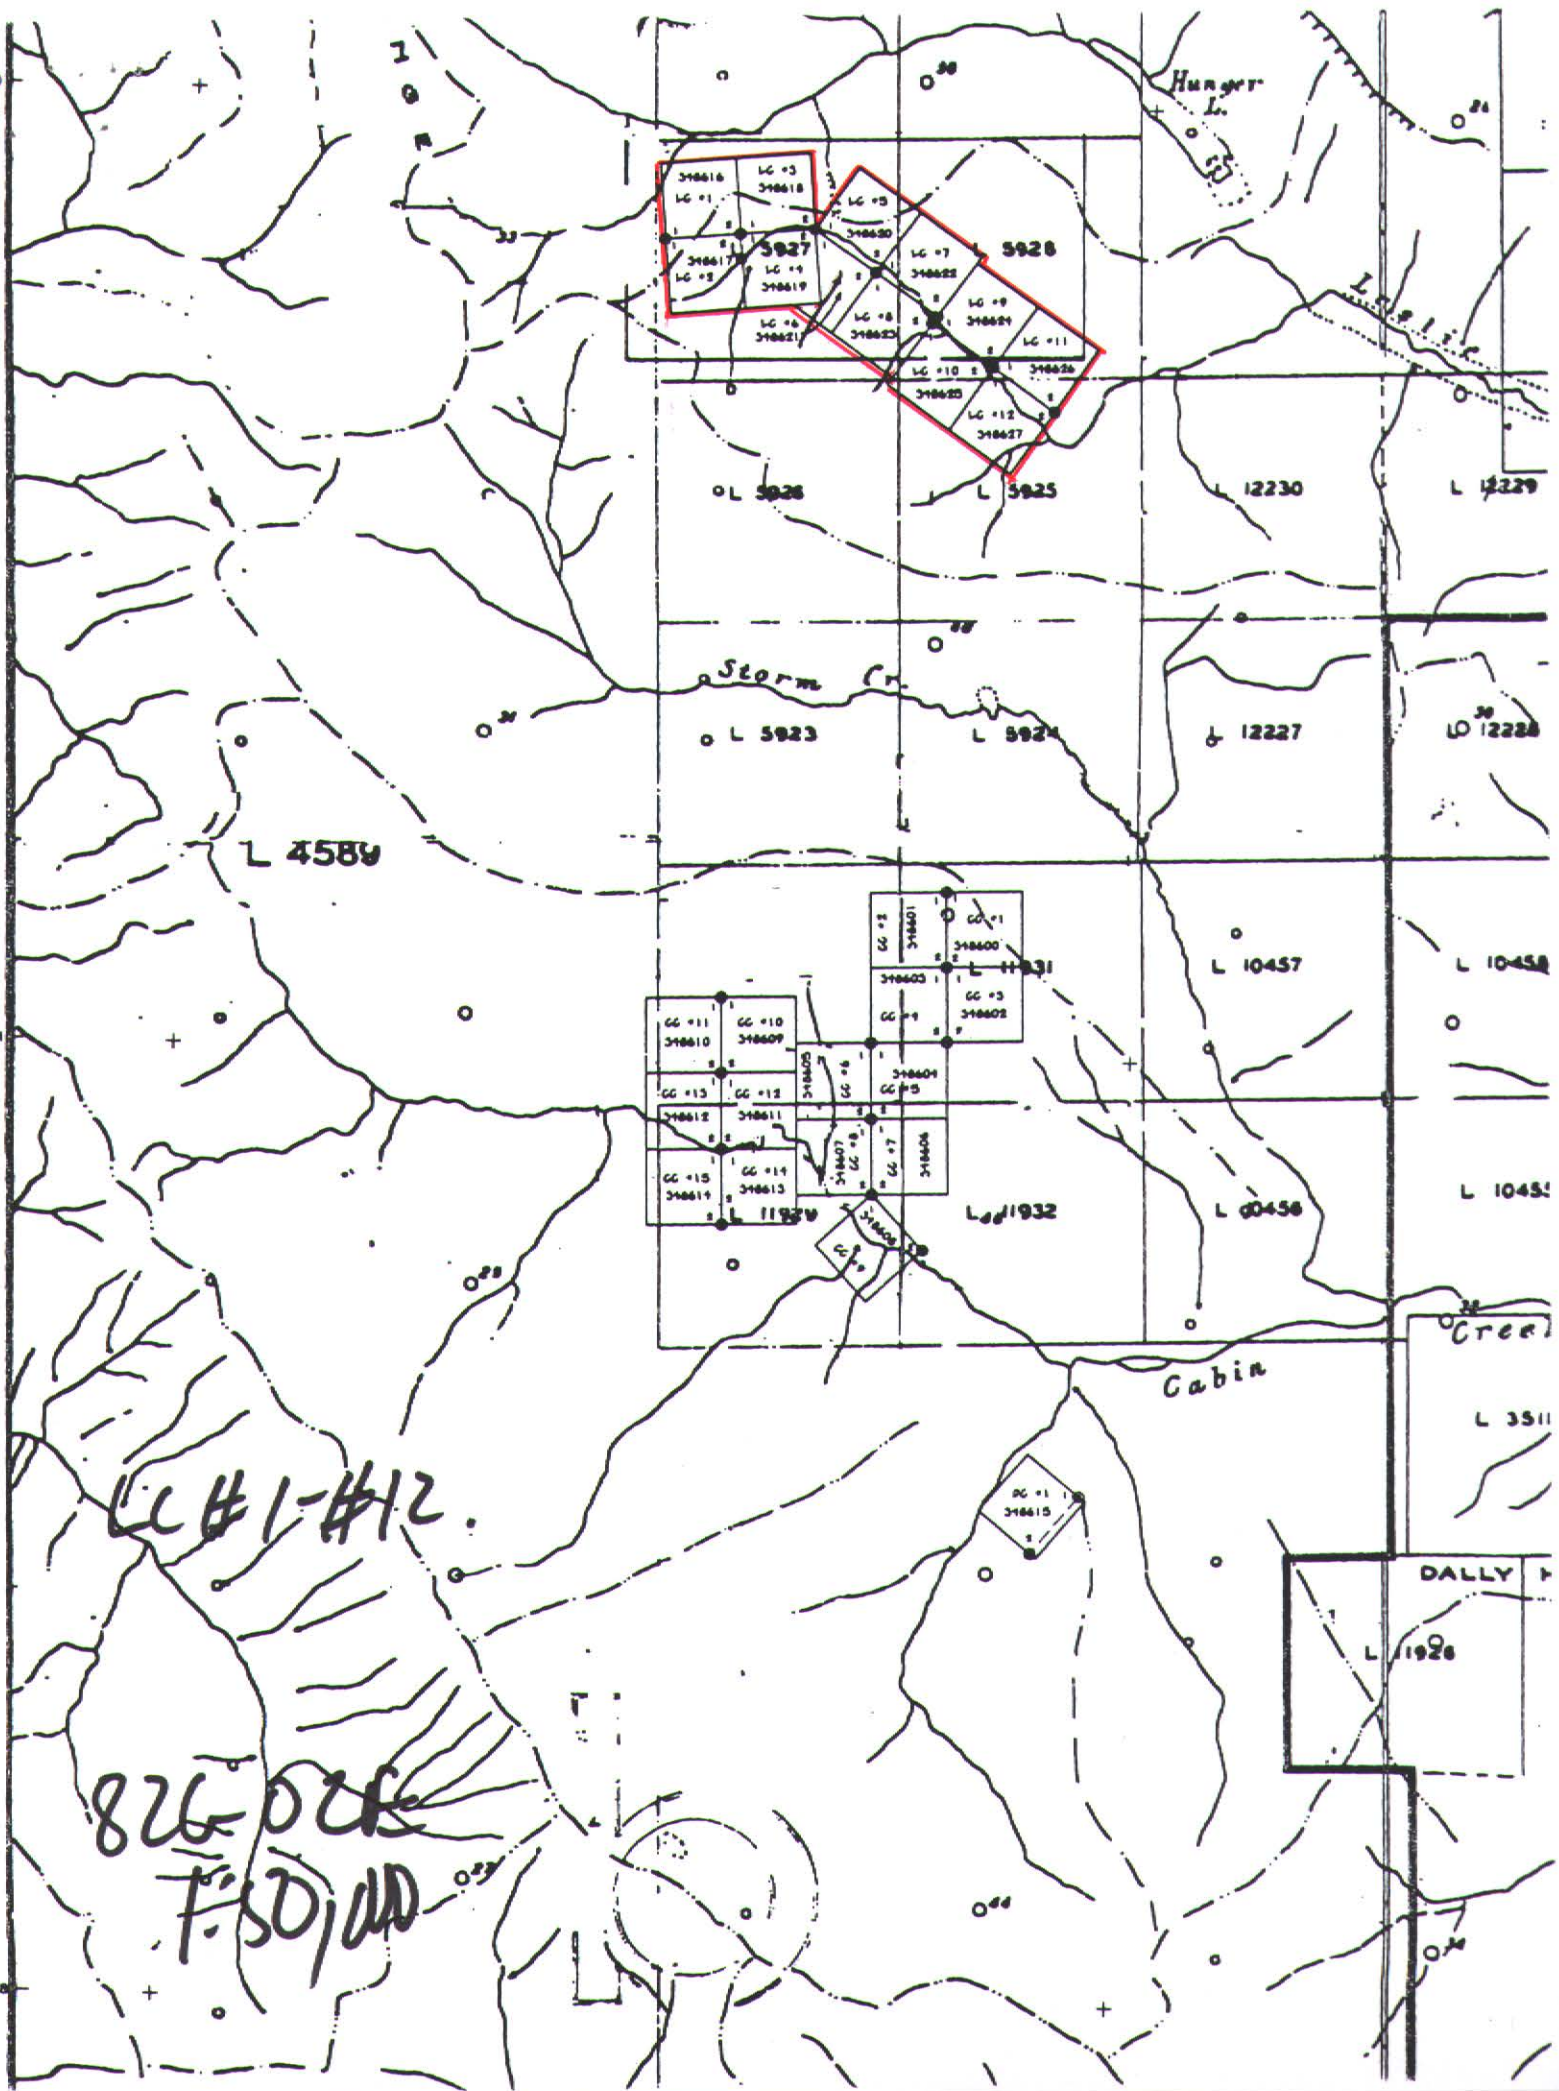

LC #1-#12.

826-026
FSD/AD

SUMMARY

The Fernie Phosphorite Project consists of three properties totaling 48 units. The sedimentary phosphorite properties lie in the Jurassic Fernie Basin, in the Fort Steele Mining Division of southeastern British Columbia.

Exploration programs completed between 1970 and 1990 outlined a mineral resource of 475,000 tonnes grading approximately 20% P₂O₅ and 600 ppm yttrium to a depth of 25 metres. A recent government compilation has speculated the total mineral resource of these properties could be in excess of 45 million tonnes to 300 metres of depth.

The metallurgy of the Fernie phosphorites is not conducive to the present standard beneficiation techniques of grinding and flotation. Recent bench scale testing of a new process, direct leaching of raw phosphate rock, has met with considerable success and may prove to be applicable to the Fernie phosphorites.

Phase I - Property acquisition	\$10,097
Phase II - Trenching and metallurgical testing	\$45,678
Phase III - Rotary drilling	\$281,785
	=====
Total Budget	\$337,560

A staged three phase exploration program is recommended for the Fernie phosphorite project. Phase I will consist of additional staking to bring the property base to a minimum of 110 units. Phase II is a program of backhoe trenching to obtain sufficient phosphorite material to conduct a series of bench scale leaching tests. Phase III will consist of 12,000 feet (3,660 metres) of rotary drilling to firm up and expand mineral resource estimates. The total cost of the this three phase program is estimated at \$337,560.

TABLE OF CONTENTS

INTRODUCTION4
GENERAL INFORMATION ON THE PHOSPHATE INDUSTRY5
 Geology.....5
 Mining5
 Milling6
 Processing6
 End Products.....8
 World Supply8
REGIONAL GEOLOGY.....11
 Fernie Formation11
REGIONAL EXPLORATION HISTORY13
BARNES LAKE14
 Location and Access.....14
 Previous Exploration14
 Geology.....18
CABIN CREEK19
 Location and Access.....19
 Previous Exploration.....19
 Geology.....21
 Preliminary Mineral Resource23
HUNGER LAKE25
 Location and Access.....25
 Previous Exploration25
 Geology.....27
 Preliminary Mineral Resource29
1996 EXPLORATION PROGRAM30
DISCUSSION31
CONCLUSIONS AND RECOMMENDATIONS.....33
REFERENCES34
COST ESTIMATES36
STATEMENT OF COSTS.....37
STATEMENT OF QUALIFICATIONS38
APPENDIX39
 Cabin Creek Resource Calculations
 Hunger Lake Resource Calculations
 Cabin Creek Plan and Sections
 Hunger Lake Plan and Sections
 1996 Claim Affidavits and Staking Sketches
 1996 Notice of Work Applications and Correspondence

LIST OF FIGURES

1. Property Locations10
2. Fernie Group Distribution.....12
3. Barnes Lake Claim Locations15
4. Barnes Lake Geology.....17
5. Cabin Creek Claim Locations20
6. Cabin Creek Geology22
7. Hunger Lake Claim Locations.....26
8. Hunger Lake Geology28

INTRODUCTION

The Fernie Phosphorite Project was initiated after a library search of open industrial mineral projects. The phosphorites generated interest because of two key aspects. First, Canada imports all of its phosphate. Western Canada imports its phosphate from the United States, predominantly the western United States. Second, these United States reserves are being rapidly depleted, leading to an anticipated phosphate resource shortfall by the turn of the century.

The main use of phosphate is in the production of phosphoric acid, and more importantly fertilizers.

Over \$350,000 in prior exploration has been expended on the properties of the Fernie Phosphorite Project. These programs included: mapping, sampling, hand trenching, backhoe trenching and drilling.

	1970's Expenditures	1980's Expenditures	1990 Expenditures
Barnes Lake	\$31,166 *		\$18,266
Cabin Creek			\$21,485
Hunger Lake			\$32,227
Cabin and Hunger **	\$25,121	\$263,644	

* Data (hence costs) is only available after 1975, though program started in 1969.

** During these programs both properties were united and costs were not separated.

Initial metallurgical testing of the Fernie phosphorites has yielded poor recoveries utilizing the standard beneficiation techniques for phosphorites. Recent laboratory and bench scale tests utilizing a vat leaching process appears to be more suited to the ore and gangue suite of the Fernie Basin phosphorites.

These new metallurgical developments, combined with the previous exploration results and the preliminary mineral resource make the Fernie Phosphorite Project an attractive exploration project.

The Jurassic Fernie basin lies in the southeastern corner of British Columbia, within the Fort Steele Mining Division. The area of the basin is bounded by the Alberta border to the east and highways 3 and 43 to the west. The basin disappears to the north of the International Border to the south and disappears north of Elkford to the north

The area is serviced by the towns of Elkford in the north, Sparwood in the centre and Fernie in the south. A myriad of logging roads provide access to much of the basin.

GENERAL INFORMATION ON THE PHOSPHATE INDUSTRY

Geology

Phosphorus is present in the earth's crust in concentrations averaging 0.10 to 0.12 percent and is the eleventh element in order of crustal abundance. Phosphate is concentrated in three main environments: marine sediments deposited in mid-paleolatitudes within restricted basins where there is upwelling of cold currents from great depths; in basic and ultrabasic alkaline igneous rocks; and in deposits of guano. Marine sedimentary ores account for approximately 80 percent of the world's phosphate reserves, igneous deposits for around 18 percent and the remaining 2 percent from guano deposits (Krauss et al, 1984; Russell, 1987).

Sedimentary phosphate ores are commonly referred to as phosphorites. They are nondescript, white to dark greyish-brown to black, shaley to sandy rocks and can contain structureless pellets or have a nodular texture. A bluish-grey "phosphate bloom" may be present on weathered surfaces.

Deposits are mined which contain between 4 and 38 percent P_2O_5 . In most cases, ores mined are beneficiated to produce a phosphate concentrate which is often referred to commercially as phosphate rock. Phosphate concentrates commonly contain 29 to 40 percent P_2O_5 . The phosphorous content of ores and concentrates is often referred to, in the industry, as "bone phosphate of lime" (BPL) or "tricalcium phosphate" (TCP), which refers to the apatite content or $Ca_3(P_2O_4)_2$ rather than the weight percent P_2O_5 (Christie, 1978; Krauss et al, 1984). Conversion between the various expressions is as follows:

	P	P_2O_5	BPL (or TCP)
1.0% P	1.0	2.2914	5.0072
1.0% P_2O_5	0.4364	1.0	2.1852
1.0% BPL (or TCP)	0.1997	0.4576	1.0

Mining

Nearly 88 percent of the phosphate rock produced in market economy countries is recovered by surface mining techniques, with strip mining and open pit mining the most commonly used techniques. Commonly, between 2 and 7 tonnes of overburden and waste are moved per tonne of ore mined. Run-of-mine ore production capacity is 0.6 to 1.0 million tonnes per annum in small operations, 1 to 8 million tonnes per annum in medium-sized operations and 8 to 25 million tonnes per annum in large operations. In almost all cases, the run-of-mine phosphate material has to be beneficiated. The basic beneficiation methods employed are sizing, washing, flotation, calcining, and calcining with leaching. A phosphate beneficiation plant may use one or more of these techniques to produce a marketable product (Fantel et al, 1984; Krauss et al, 1984).

Location	Type	Overburden Thickness	Ore Thickness	Grade P_2O_5
Western U.S.	Open pit	5 to 10 m	9 to 18 m	21.3%
Western U.S.	Underground		1 to 1.2 m	31%
Florida	Open pit	3 to 10 m	3 to 8 m	7%
Tennessee	Open pit		0.6 to 1.2 m	16%

Phosphate rock mined in the western United States (Idaho, Montana, Wyoming, Utah) is from the Retort and Meade Peak members of the Permian Phosphoria Formation. The majority of mines are strip mining operations with ore zones ranging from 9 to 18 metres thick, with an average grade of 21.3 percent P_2O_5 and over 400 ppm yttrium. Overburden thickness is commonly 5 to 10 metres (Fantel et al, 1984). Cominco American operates an underground phosphate mine in Montana in which the phosphate horizon is 1 to 1.2 metres thick and has an average grade of >31 percent P_2O_5 .

Phosphates mined in Florida and South Carolina are from the Miocene Hawthorne Formation and the younger, reworked deposits of the Bone Valley Formation. Ore thicknesses range from 3 to 8 metres, with overburden of 3 to 10 metres. Average grade is 7 percent P_2O_5 . Flotation processes are used to beneficiate the ores. Phosphates mined in Tennessee have a minimum cutoff grade of 16 to 17.2 percent P_2O_5 and a minimum thickness of 0.6 to 1.2 metres. (Fantel et al, 1984).

Milling

The purpose of beneficiation is to raise the P_2O_5 level to commercial standards (30 to 37 percent P_2O_5) and to reduce the proportion of carbonate, iron and alumina oxides, organic matter or trace elements. Most phosphate rock requires some beneficiation prior to shipment to processing plants, hence the mineralogical and chemical characteristics of the deposits are important.

Acid grade phosphate rock	+31% P_2O_5
Furnace grade phosphate rock	24% to 31% P_2O_5
Beneficiation grade phosphate rock	18% to 24% P_2O_5

Phosphate rock produced in the western U.S. is classified as acid or fertilizer grade, more than 31 percent P_2O_5 ; furnace grade 24 to 31 percent P_2O_5 ; and beneficiation grade, 18 to 24 percent P_2O_5 . Acid-grade rock is used directly in fertilizer plants, furnace-grade rock is charged to electric furnaces and beneficiation-grade rock is upgraded to acid-grade or furnace feed. Most western U.S. phosphate ore is beneficiated by crushing, washing, classifying and drying (Stowasser, 1985).

Processing

The first step in the processing of phosphate rock into fertilizers is producing phosphoric acid. This is done by either the "dry" or "wet" process. In the dry process, phosphate rock is roasted to elemental phosphorous. The phosphorous is then oxidized to produce P_2O_5 and finally absorbed in water to yield H_3PO_4 . This process produces a very high quality acid, however, the high cost usually precludes it as the most favored method in making fertilizers.

The wet process involves acidifying raw phosphate rock (finely ground to 200 mesh sieve size) with a strong acid as sulphuric, nitric, phosphoric or hydrochloric. Sulphuric acid is favored in western Canada because of its low cost, high availability and lower corrosiveness. The resulting crystallized gypsum ($CaSO_4$) is removed and the "Filter Acid" (26% to 30% P_2O_5) is evaporated under vacuum to produce concentrated "plant phosphoric acid" (40% to 44% P_2O_5) or higher grade "commercial" or "merchant" grade acid (45% to 54% P_2O_5). Plant phosphoric acid is then transferred to the fertilizer production units where varying amounts of ammonia are added. The final step is the formation of uniform size granules, and the drying of the granules. The over-all production of ammonium phosphate fertilizers by the wet process is about 88% to 92% efficient in recovering the available P_2O_5 in the raw phosphate rock.

Filter grade phosphoric acid	26% to 30% P_2O_5
Plant grade phosphoric acid	40% to 44% P_2O_5
Merchant grade phosphoric acid	45% to 54% P_2O_5

Most commercial fertilizer plants use a wet acidulation method in the initial stage of fertilizer production. Phosphate rock is treated with sulphuric acid to produce phosphoric acid and gypsum ($CaSO_4$) as a waste product. A high calcium carbonate content in the phosphate rock increases the consumption of sulphuric acid while magnesium renders the phosphoric acid unacceptably viscous. Elevated concentrations of organic matter are also undesirable (but can be removed by calcining), as are trace elements such as cadmium, lead, mercury, arsenic and chromium (Butrenchuk, 1987; Krauss et al, 1984).

Phosphate rock to be used in fertilizer plants must meet the following specifications:

- > P_2O_5 content : 27 to 42 percent
- > CaO: P_2O_5 ratio: 1.32 to 1.60 for apatite
- > $\frac{Al_2O_3 + Fe_2O_3 + MgO}{P_2O_5} < 0.1$ (optimum value)
- > MgO tolerance is approximately 1.0 percent
- > Cl: < 0.2 percent
- > BPL:MgO ratio : 170 or higher
- > BPL:($Al_2O_3 + Fe_2O_3$) ratio : > 20
- > BPL:CaO ratio : > 1.5

$$BPL = \text{Bone phosphate of lime} = (2.1852 * \text{percent } P_2O_5)$$

The wet acidulation fertilizer production process involves:

Starting materials:	3.5 tonnes of phosphate concentrate
	1 tonne of sulphur or,
	3 tonnes of sulphuric acid (H_2SO_4)
Products :	1 tonne of P_2O_5 in the form of H_3PO_4
	5.5 tonnes of hydrated calcium sulfate (phosphogypsum)
	<81 kg of fluorine as HF or
	102.5 kg of H_2SiF_6 of which 36 kg are recoverable

The phosphogypsum is generally considered a waste product as it cannot compete with other commercial sources of gypsum due to its fine grain size and numerous impurities (Krauss et al, 1984).

In North Carolina, phosphogypsum has been mixed with flocculated colloidal clays produced in washing plants and used to backfill mined out excavations; research is also underway to determine if it could be used as a compacted sub-base for highways, secondary roads and parking lots. The economics of calcining phosphogypsum to produce a cement-type clinker and sulphur dioxide, from which elemental sulphur could be recovered, are also being examined (Stowasser, 1988).

End Products

Four main products are produced from phosphate rock: elemental phosphorous, phosphoric acid, phosphatic fertilizers and phosphate chemicals. The majority of phosphate ores mined (approximately 90%) is used in the production of fertilizers; some also goes into the production of detergents, animal feed supplements, food preservatives, water treatment substances, anti-corrosion agents, cosmetics and fungicides; and minor amounts are used in the metallurgy and ceramics industries.

In western Canada, phosphoric acid is produced at three plants: Cominco Ltd at Trail, B.C.; Esso Chemical Canada at Redwater, Alberta and Sherritt Gordon Mines Limited at Fort Saskatchewan, Alberta. Most of the product is used in the manufacture of fertilizers, with a minor amount used to produce calcium phosphate. Phosphate fertilizers produced are mainly of the diammonium phosphate (DAP) and monoammonium phosphate (MAP) varieties.

World Supply

The principle world phosphate producing countries over the last five years were the United States, China, Morocco and the former U.S.S.R. Jordan, Tunisia, Israel, South Africa, Senegal, and Togo also produce significant volumes of phosphate rock.

Phosphate Rock World Production (thousand tons) by Country
From: Cantrell (1995)

Country	1990	1991	1992	1993	1994
United States	46,300	48,100	47,000	35,500	41,100
China	21,600	22,000	23,000	24,000	24,000
Morocco	21,400	17,900	19,100	18,300	18,000
Former U.S.S.R.	36,800	28,400	18,500	13,400	11,000
Jordan	6,080	4,430	4,300	3,570	3,500
Tunisia	6,260	6,350	6,400	5,500	5,500
Israel	3,520	3,370	3,600	3,590	3,600
South Africa	3,170	3,180	3,080	2,470	2,880
Senegal	2,150	1,740	2,280	1,670	1,600
Togo	2,310	2,970	2,080	1,750	1,800
Remainder	12,410	11,560	8,060	11,250	11,020
Totals	162,000	150,000	141,000	121,000	124,000

More than 50 percent of the phosphate rock produced in the United States is exported, placing it second to Morocco in exporting countries. Other important exporting countries are: Israel, Jordan, the former U.S.S.R., the Pacific Islands, and west Africa. Asia, western Europe, Latin America, Oceania and Canada were the major phosphate importing regions of the world.

Although Canada has substantial phosphate deposits, none are near production. Therefore, Canada imports all of its phosphate rock. Most of these imports come from Togo, which has recently supplanted the United States as the number one Canadian supplier. A large portion of western Canada's phosphates are still imported from the western United States.

Canada will likely continue to source phosphate rock outside the United States unless new sources, either local or foreign, are found. Experts predict by the year 2000 the demand on U.S. phosphates will far exceed the capacity. This will also have an effect on the other major importers of U.S. phosphate rock, Japan and Korea.

The price of phosphate rock showed a dramatic slump in the late 1970's, but has subsequently stabilized. The present prices (f.o.b. Florida) are from Gurr (1996):

Location	December 1994	December 1995
Central Florida	US\$19.85-24.25/t	US\$24.25-26.45/t
US Gulf (68% BPL)	US\$33.00-35.25/t	US\$35.25-37.50/t
US Gulf (72% BPL)	US\$38.80-41.90/t	US\$39.70-44.10/t
US West (72% BPL)	US\$37.48/t	US\$35.72/t

After accounting for ship transport to Vancouver, followed by rail transport to the Alberta plants, prices in the range of Cdn\$70 to Cdn\$80 (delivered to plant) could make Canadian deposits economic. (Barry, 1987).

In 1986 the annual capacity of fertilizer plants in western Canada was 724,000 tonnes, of which, the greatest capacity was in Alberta. At present there is only a single fertilizer plant in British Columbia, operated by Cominco Limited at Trail.

By-products that may be recovered from the processing of phosphate rock include uranium, vanadium, fluorine and rare earth elements. Uranium has the best potential for by-product recovery but is generally only recovered at a very few plants. Vanadium, used in the iron and steel industry, is the only metal currently being recovered as a by-product of phosphate extraction in the United States. Fluorine is used in the chemical, ceramics and steel industries and in the refining of uranium ores.



Yttrium	US\$23.63 per kilogram
Cerium	US\$4.05 per kilogram
Lanthanum	US\$3.94 per kilogram

A variety of rare earth metals and yttrium occur in sedimentary phosphate deposits, including the British Columbia deposits. Rare-earth growth in the United States is forecast to be less than 3 percent while in Japan demand for yttrium, lanthanum, cerium, and europium is expected to increase at the rate of 13 percent compounded annually until the year 2000. The actual growth rate for yttrium in Japan in the past few years has been 35 percent (King, 1986). At the present time world consumption for yttrium is growing at a rate of 10 to 17 percent per annum. In 1991 the price of yttrium (99.99% purity) was US\$23.63 per kilogram; the price for cerium was US\$4.05 per kilogram, and the price for lanthanum was US\$3.94 per kilogram (Castor, 1994). Yttrium, lanthanum and cerium are used as dilutents in nuclear reactors. Rare earth elements are also used in magnetic materials, phosphors, neutron capture applications, glass, ceramics, and other uses (Castor, 1994).

Mammoth Geological Ltd.
Fernie Phosphate Project
Property Locations

Drawn By: R.T. Henneberry
Date: January 1997

Figure 1

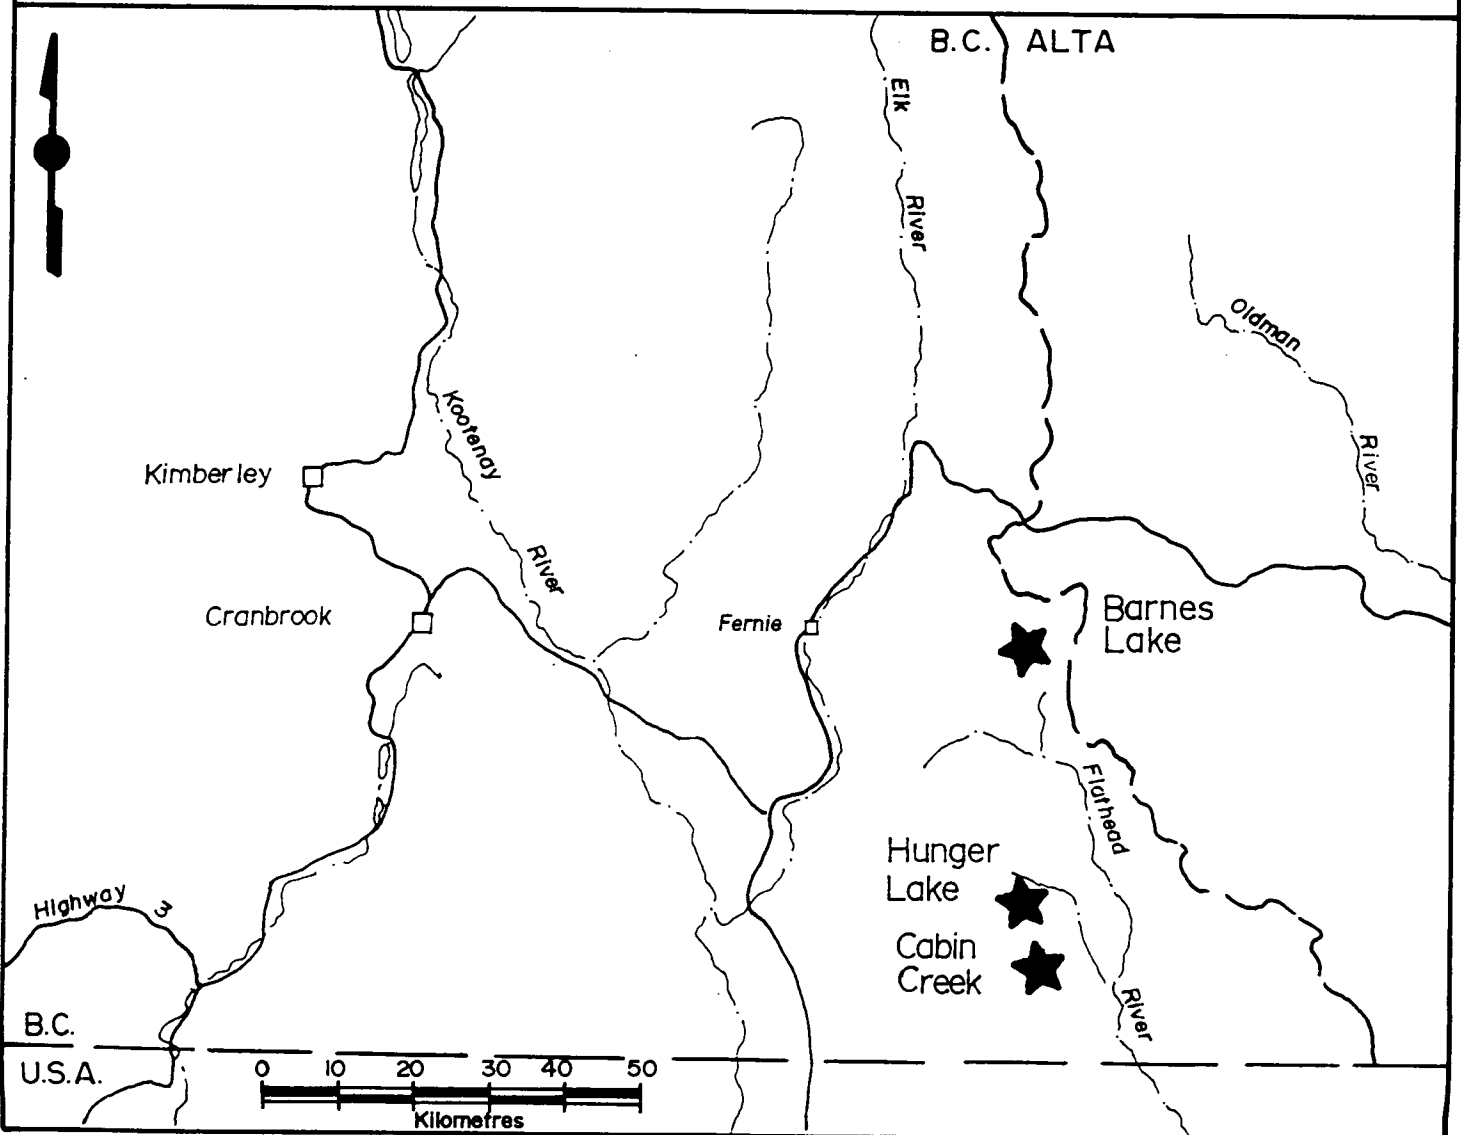

REGIONAL GEOLOGY
(Summarized from Butrenchuk, 1987; 1996)

Southeastern British Columbia is characterized by a sequence of Devonian to lower Jurassic marine strata deposited in a miogeosyncline along the western edge of the stable proto-North American craton. Depositional environments for the different sequences varied from platformal to basinal.

Cambrian to Mississippian strata, consisting of shallow-water carbonate assemblages that pass westward into deeper water, are predominantly limestone, shale and siltstone. Pennsylvanian strata were deposited in a shallow marine environment, producing fine clastic and carbonate units. Low energy, shoreline conditions characterized the Permian, depositing fine grained sandstone, siltstone, chert and minor shale. The end of the Permian is marked by a major unconformity.

Triassic sedimentation took place in a stable shelf environment, marked by bar and deltaic deposits on the eastern limits of the shelf and widespread finer clastic sediments to the west. The end of the Triassic is also defined by a major unconformity.

Moderately deep-water sedimentation, and minimal miogeosynclinal subsidence characterized the Jurassic. Deposition of widespread phosphorite and phosphatic shales carried throughout the lower Jurassic, especially at the base of the Fernie Formation, within the Fernie Basin.

Non-marine Cretaceous strata containing extensive coal measures overlie the miogeosynclinal stratigraphy.


Thrust faulting, with older rocks overriding younger rocks to the east is a common phenomenon of the eastern Rocky Mountains. Further complicating structure, the Fernie Basin has been folded in a doubly-plunging syncline. Several west-side-down normal faults cut the centre of the synclinorium.

Fernie Formation

Yttrium-rich phosphatic rocks occur in a number of stratigraphic intervals within the miogeosyncline; however, the thickest and most continuous phosphate horizon was developed at the base of the Jurassic Fernie Formation. The basal Fernie phosphatic strata are generally one to two metres thick, and contain unusually high concentrations of yttrium.

The base of the Fernie Group is marked by a persistent pelletal phosphorite horizon that is 1 to 2 metres in thickness and generally contains greater than 15% P_2O_5 . Grades in excess of 30% P_2O_5 have been located. The horizon commonly consists of two pelletal phosphorite beds separated by a thin chocolate brown to black phosphatic shale bed. The basal phosphorite rests either directly on Triassic strata or is separated from the underlying rocks by a thin phosphatic conglomerate. Phosphatic shales of variable thickness, generally less than 3 metres, overlie the phosphorites. The top of this sequence is locally marked by a yellow-orange bentonite bed.

The entire Triassic / Jurassic sequence has been structurally deformed, primarily by folding and thrust faulting. This structural deformation is important as it can result in considerable thickening of the phosphorite horizon, either by thrusting one section of the horizon directly on top of another, or by slumping during folding resulting in increased thicknesses at the nose of folds. The folding can also bring larger areas of the horizon close to surface, paralleling the topography. A combination of any or all of these phenomenon makes an especially attractive target.

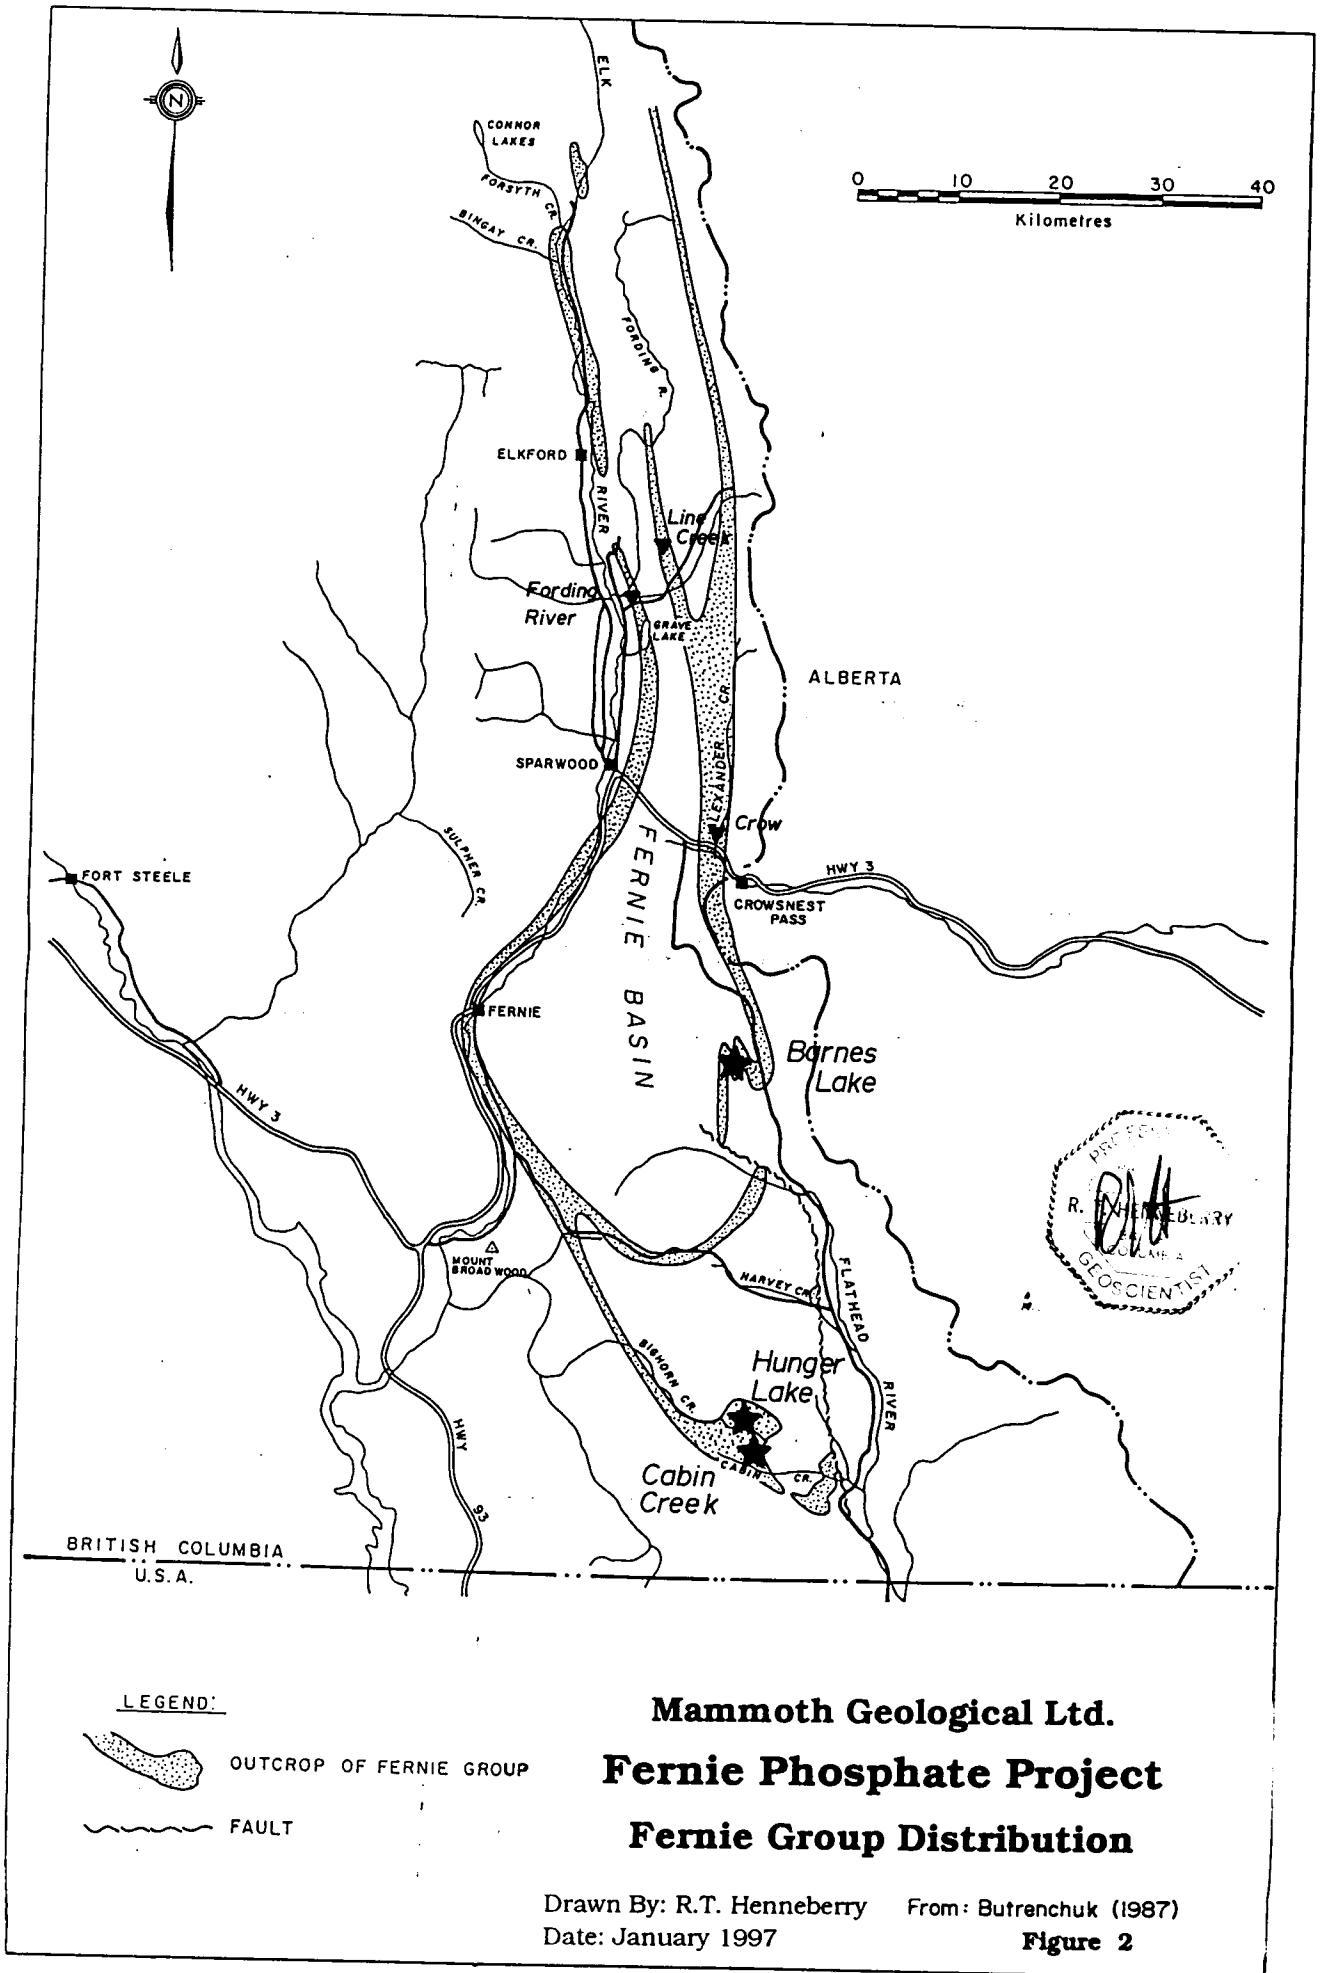

REGIONAL EXPLORATION HISTORY

The exploration history of the Fernie Basin began in the period 1925 to 1932 when Consolidated Mining and Smelting Company of Canada, Limited (later Cominco Ltd.) outlined various phosphate horizons in the Devonian to Jurassic stratigraphic succession, and defined the areas which offered the greatest economic potential. Exploration development work was highlighted by the opening of three small exploratory underground mines. Bulk sampling and metallurgical testing attempted to identify a beneficiation method to upgrade the phosphate rock, without success. Cominco obtained mining leases on the important showings of the time. (Kenny, 1977).

The next period of exploration was again initiated by Cominco Ltd. in the early to mid 1960's. Several of the phosphate leases were further explored to upgrade Cominco's data base. New metallurgical techniques were utilized on bulk samples from some of the lease and preliminary feasibility studies were conducted on two of the leases. (Kenny, 1977).

The entire basin became active in the late 1970's through to earlier 1980's, when the exploration moved further south as these areas became accessible through the construction of logging roads. Cominco Ltd. located additional properties, conducting trenching and drilling programs, as well as further metallurgical testing (Kenny, 1978).

Several other companies, including Imperial Oil Ltd. and First Nuclear Corporation Ltd. were active in the southern section of the Fernie basin, conducting mapping, trenching and percussion or diamond drilling programs (Heffernan, 1978; Van Fraassen, 1978; Hartley, 1982). Metallurgical testing was undertaken on samples from the southern Fernie Basin by both the Federal Government (Hartman and Wyman, 1974) and industry (Corder, 1972).

Formosa Resources Corporation explored several of the known showings in the southern Fernie Basin during 1989-1990 (Pell, 1990a, 1990b, 1990c). These programs consisted of mapping and backhoe trenching. No metallurgical work was completed during this program.

The provincial geological survey has directed two recent programs at the phosphate potential of the Fernie Basin, leading to two publications: Butrenchuk (1987) and Butrenchuk (1996). These programs consisted of compilation of known data, supplemented by a fill-in mapping and sampling program.

The exploration programs have shown there to be a considerable phosphate resource within the Fernie Basin, estimated by Butrenchuk (1996) at 340 million tons grading 15% to 20% P_2O_5 .

The last hurdle to be overcome is metallurgy. On-going testing by Cominco Ltd., supplemented by others has not yet reached the point where the phosphorites can be beneficiated to produce a saleable concentrate. According to Butrenchuk (1996) the last metallurgical testing was Cominco Ltd.'s, now over 10 years old.

Recent industry research has been directed at direct leaching of raw phosphate rock. Recoveries ranging from 98% on Phosphoria Formation phosphorite (Judd et al, 1986) to 90% on Florida phosphorites (Wilemon and Scheiner, 1987) have been obtained. Habashi (1994) is also conducting leaching tests on the Florida phosphorites and has designed a preliminary bench scale flow sheet. Direct leaching of the phosphorites also enhances the rare earth element recoveries (Habashi, 1994), a key consideration for the Fernie phosphorites.

BARNES LAKE

The Barnes Lake phosphate occurrence lies within the basal Fernie Formation phosphorite bed. This area was first explored in the late 1960's. Two claim groups (totalling 18 units) were staked to cover the key areas of the occurrence. The claims lie on sheet 082G/07E.

Claim Name	Record Numbers	Record Date
MC #1-#6	348594-348599	July 15, 1996
BL #1-#12	348582-348593	July 16, 1996

Location and Access

The Barnes Lake phosphate occurrence is located in the Fort Steele Mining Division, approximately 32 kilometres south of Sparwood and 27 kilometres east of Fernie. The Flathead Forest Service Road provides access to the northern section of the property. Recent flooding has washed out the Michel Creek bridge, requiring minor repairs to complete a ford or level crossing of the creek. As well, two areas of the exploration road on the west side of Michel Creek will require some repairs to re-establish four wheel drive access to the main showing areas. Presently, a four wheel drive ATV could utilize the road as is.



Elevations in the area range from 1585 metres to 2255 metres. Stands of spruce and timber are present at lower elevations, while alpine terrain predominates as elevation increase. The claims are readily accessible from early July to mid-October. Water for drilling is available from numerous creeks at lower elevations, but likely only from Barnes Lake itself at higher elevations.

Previous Exploration

The Barnes Lake occurrence has undergone two periods of exploration, the Western Warner Oils / Medesto Exploration programs in the 1970's and the Formosa Resources Corporation program in 1989.

The Western Warner / Medesto programs have been poorly documented. Exploration activity consisting of mapping, trenching, drilling and bulk testing were reported (1968 Ministry of Mines Annual Report, 1969 through to 1972 Ministry of Mines Geology, Exploration and Mining in British Columbia; 1968 MMAR, 1969 GEM to 1972 GEM) but documentation is not available nor is it in the public domain.

The first documented program was a refraction seismic survey completed in 1975. Four seismic lines were run, three on the west side of Michel Creek and one on the east side over a strike length of 4.5 kilometres. Prior to the field testing of the conclusions, the survey was deemed to have located the phosphorite bed on each of the lines. (Dorian, 1975).

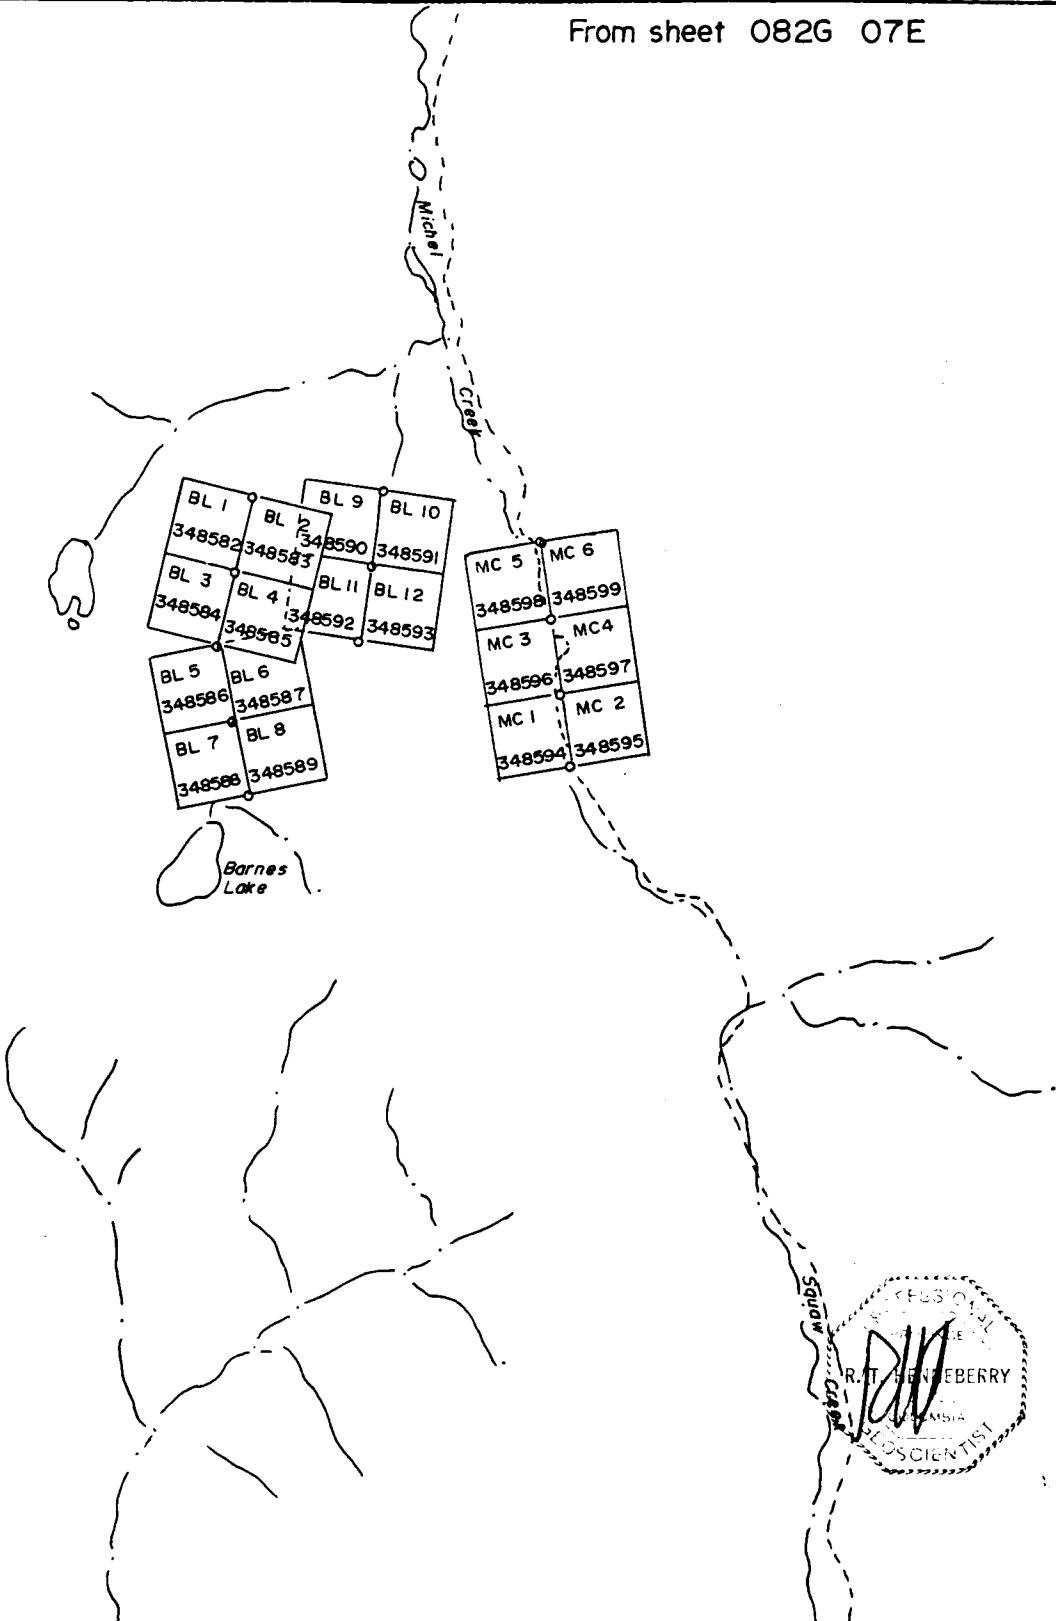

Mammoth Geological Ltd.
Fernie Phosphate Project
Barnes Lake Claim Locations



Drawn By: R.T. Henneberry
 Date: January 1997

Scale: 1:50,000
Figure 3

Percussion and diamond drilling was undertaken in 1977 to test the phosphorite to depth on two of the seismic lines. Neither of the drill holes reached the phosphorite horizon, the first not reaching bedrock and the second falling short of the horizon. The drilling results cast considerable doubt on the conclusions of the 1975 seismic survey. (Pelzer, 1977).

Undocumented 1968-1972 Barnes Lake Exploration Programs


Reference	Claims	Program
1968 MMAR pp.324	WW (not specified) WW (not specified)	5 miles access road 642 feet (7 holes) drilling
1969 GEM pp.398-399	WW (not specified) WW (not specified) WW (not specified) PH (not specified)	50 ft long bulldozer trench 1 mile of road construction 756 feet (6 holes) diamond drilling 2 drill holes (no footage)
1970 GEM pp.504	WW (1-40) WW 48, 57, 101	8 by 1600 ft trench 217 feet (3 holes) drilling
1971 GEM pp.468-469	WW 46,48,50,102,104 WW 46,48,50,102,104 WW 55,102 PH 8,10	1 mile of road 20,400 ft trenching 207 feet (2 holes) drilling 2000 ft trenching
1972 GEM pp.606-605	WW 102,104 PH 10	280 feet (5 holes) drilling 120 feet (2 holes) drilling

A compilation report (Dales, 1978) described the 1978 drilling program and provided minimal details on the programs completed during the early 1970's. Dales (1978) reported an earlier reserve calculation of 288,000 tons of phosphate rock to a depth of 50 feet (18 m) assuming a thickness of 3 feet (1 m) based on bulk testing and diamond drilling.

Mineral Resource Tonnage Summary

Area Block	m width	% P ₂ O ₅	ppm Y	to 18 m depth
From Dales (1978)	1.00	27.00	na	288,000

Formosa Resources Corporation (Pell, 1990c) explored the Barnes Lake phosphorites in 1990. They undertook a program mapping, sampling, hand trenching and backhoe trenching. Eight backhoe trenches and two hand trenches were established along strike on the west side of Michel Creek. The trenching results, summarized below, confirmed the continuity of the phosphorites and the continuity of grade along strike, substantiating the earlier work compiled by Dales (1978).

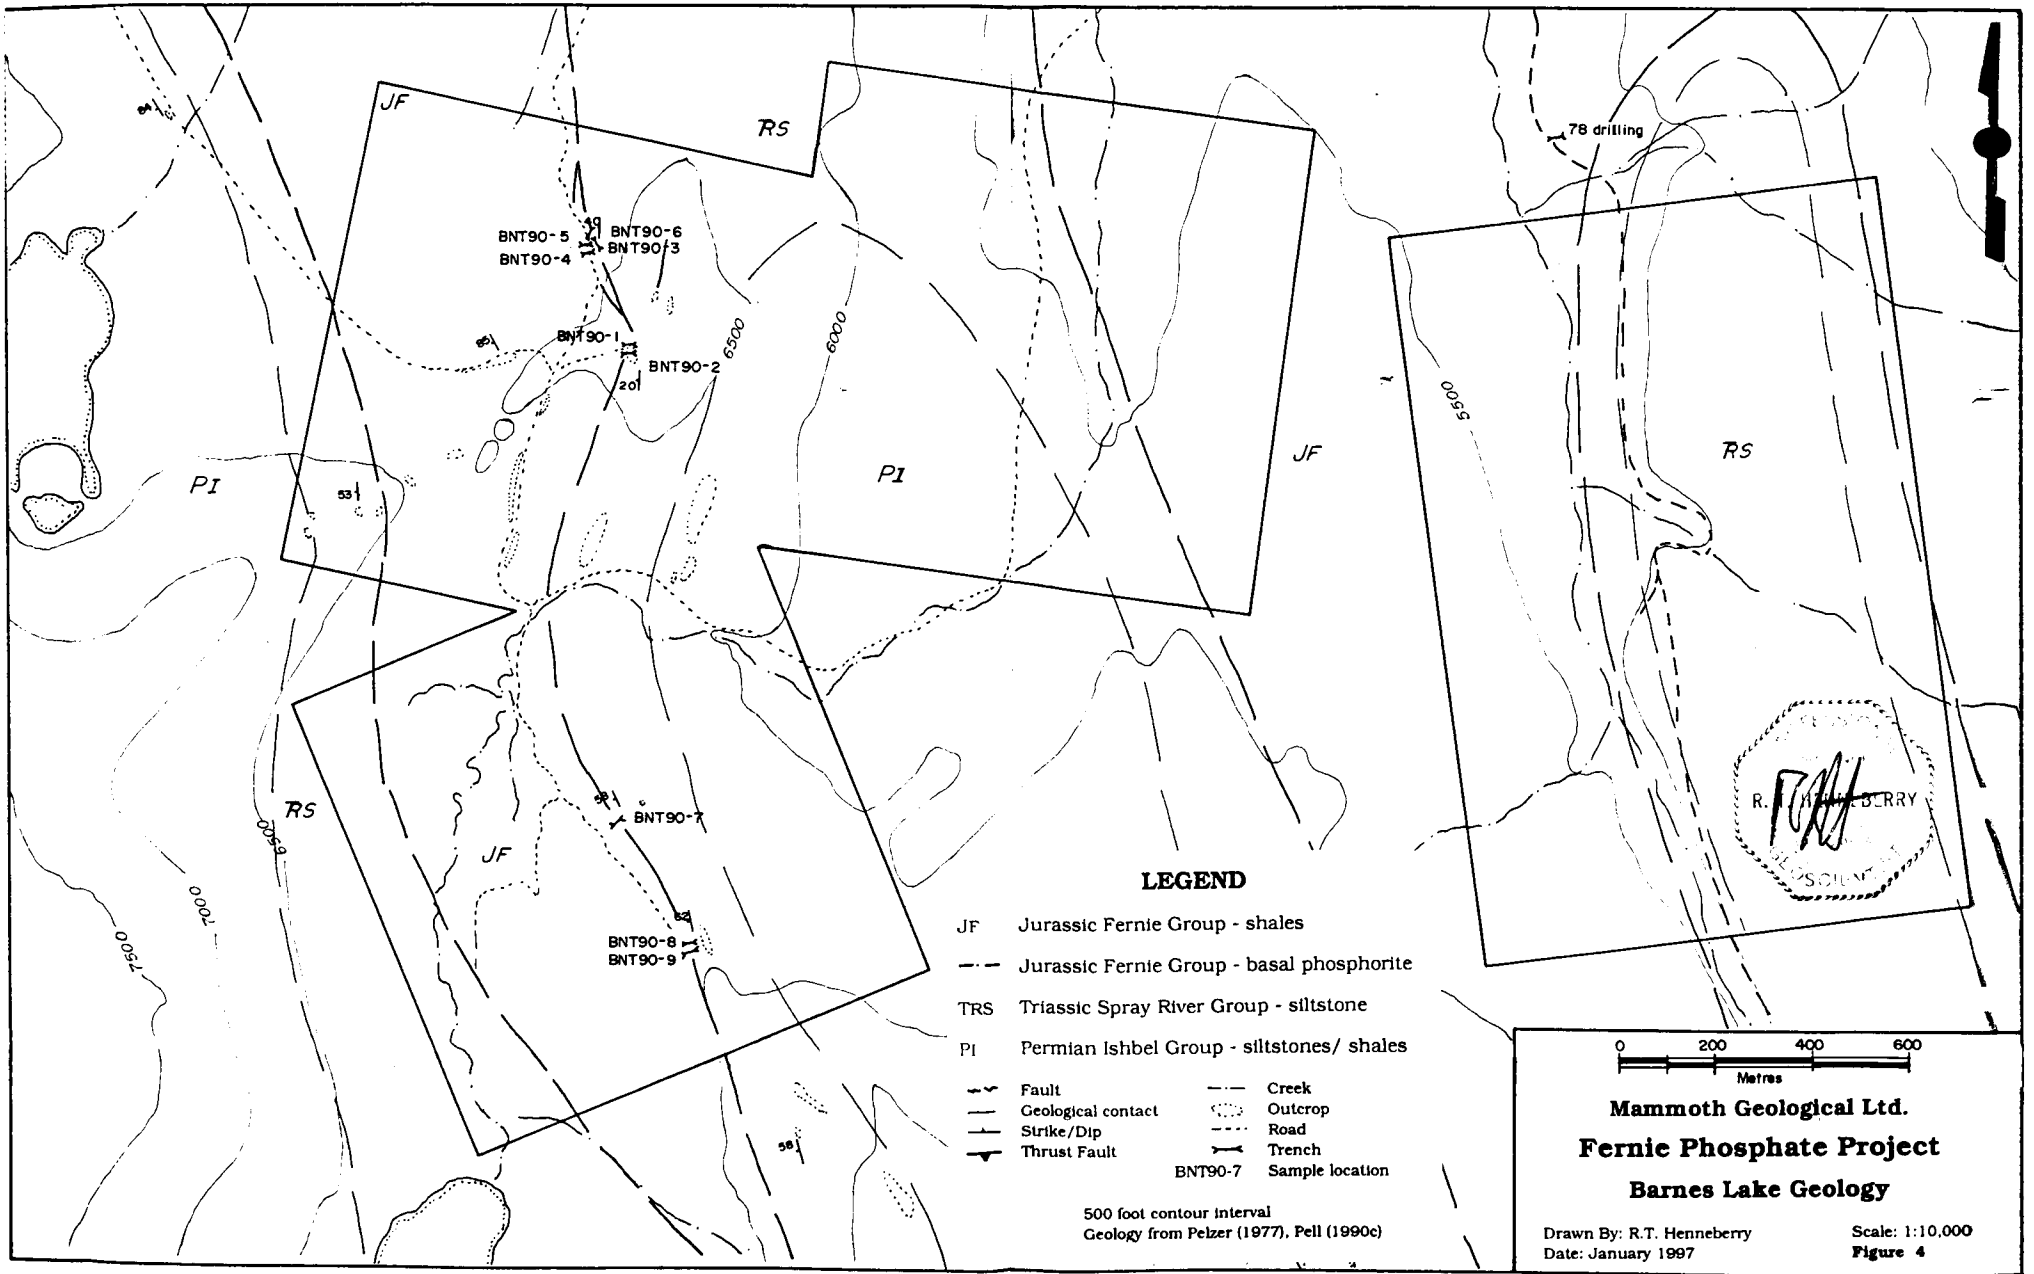

LEGEND

- JF Jurassic Fernie Group - shales
- Jurassic Fernie Group - basal phosphorite
- TRS Triassic Spray River Group - siltstone
- PI Permian Ishbel Group - siltstones/ shales
- Fault
- Geological contact
- Strike/Dip
- Thrust Fault
- Creek
- Outcrop
- Road
- Trench
- BNT90-7 Sample location

500 foot contour interval
 Geology from Pelzer (1977), Pell (1990c)



Mammoth Geological Ltd.
Fernie Phosphate Project
Barnes Lake Geology

Drawn By: R.T. Henneberry
 Date: January 1997
 Scale: 1:10,000
 Figure 4

Assay Results from Sections Through the Barnes Lake Phosphate Horizon

Showing	Source	% P ₂ O ₅	ppm Y	m width	Showing	Source	% P ₂ O ₅	ppm Y	m width
BN 90-23	Pell. 1990c	30.50	777	0.98	BN 90-37	Pell. 1990c	27.29	658	0.65
BNT 90-01	Pell. 1990c	25.00	722	0.68	BNT 90-05-1	Pell. 1990c	23.73	643	1.24
BNT 90-02	Pell. 1990c	25.67	718	0.52	BNT 90-05-2	Pell. 1990c	25.14	758	0.75
BNT 90-03-1	Pell. 1990c	23.16	629	1.11	BNT 90-06	Pell. 1990c	24.89	712	0.87
BNT 90-03-2	Pell. 1990c	21.63	712	1.11	BNT 90-07	Pell. 1990c	23.58	595	1.45
BNT 90-04	Pell. 1990c	21.24	582	0.78	BNT 90-08	Pell. 1990c	20.94	493	1.62
					BNT 90-09	Pell. 1990c	22.14	565	2.07

Geology (summarized from Pell (1990c))

The Barnes Lake occurrence is underlain by Permian through to Jurassic strata. The Permian Ranger Canyon Formation rocks are medium to thick-bedded, cream to buff to light-grey weathering, fine-grained sandstones, siltstones and dolomitic siltstones, with white to light grey fresh surfaces.

The Triassic Sulphur Mountain Formation rocks are predominantly buff, yellowish-brown and chocolate brown weathering, thin to medium bedded siltstones and shaley siltstones. Dark brown shale horizons with thin siltstone interlayers are common within the formation, occurring commonly at the top of the formation.

Fernie Group rocks are recessive weathering and poorly exposed. Where the base of the Fernie Group is exposed, it is marked by a phosphorite horizon that is commonly 1.1-2.1 metres thick. Brown and black shales commonly overlie the phosphorites. The shales are overlain by black, brown and dark grey shales with interbedded buff to orange weathering dolostones, buff, fine-grained sandstones and light-grey limestones.

The basal phosphorite horizon generally consists of poorly to well consolidated, gritty, pelletal phosphorite and shaley phosphorite capped by phosphorite shale.

In most trenches, the phosphorite horizon overlies orange to yellow clays, or interbedded buff to brown Triassic shales and siltstones. The phosphorites are generally shaley to pelletal in nature and exhibit an increase in grade upsection until a fairly pure phosphorite (28% to 32% P₂O₅) is developed. Commonly, the high-grade phosphorite is black, pelletal and overlain by increasingly shaley phosphorite and shale. Locally, phosphate nodules hosted in a pelletal phosphate matrix are developed in the high grade beds.

On the Barnes Lake claims, the stratigraphically complete measured sections average 22.53% P₂O₅ and 606 ppm yttrium across an average thickness of 1.43 metres. One incomplete section contained an average of 30.5% P₂O₅ and 777 ppm yttrium across 0.98 metres. The values ranged from 2.66% P₂O₅ and 98 ppm yttrium in shale layers within the phosphorite section to 32.18% P₂O₅ and 1065 ppm yttrium in the phosphorite itself.

The structure of the Barnes Lake area is dominated by a pair of north-northwest trending, upright to overturned anticlines and the intervening syncline which is cored, in the central and northern part of the property, by a thrust fault. Small backthrusts occur along the western limb of the easternmost anticline and locally disrupt phosphatic strata.

Pell (1990c) identified an area, on the west limb of the easternmost anticline, where the dip of the phosphate bed and the hillside are roughly parallel.

CABIN CREEK

The Cabin Creek phosphate occurrences lie within the basal Fernie Formation phosphorite bed. Three distinct bands or zones, represented by structural repeats have been identified. This area was first explored in the late 1970's. Three claim groups (totalling 16 units) were staked to cover the key areas of the occurrence. The claims lie on sheet 082G/02E.

Claim Name	Record Numbers	Record Date
CC #1-#9	348600-348608	July 13, 1996
CC #10-#15	348609-348614	July 14, 1996
DC #1	348615	July 14, 1996

Location and Access

The Cabin Creek phosphate occurrences are located in the Fort Steele Mining Division, about 45 kilometres southeast of the town of Fernie in southeastern British Columbia. The claims are accessible by maintained then secondary logging roads with the maintained logging road leaving Highway 3 at the Morrissey Road turnoff.

The actual claims lie on the north slope of Cabin Creek Valley, accessible via the Cabin Creek Forestry Road and its spurs, though the spurs are now cut by regularly spaced water bars or ditches, requiring a 4X4 vehicle for access.


Elevations range from 1675 metres to 2135 metres. Large areas have recently been clearcut; grasses, small plants, fireweed and stumps characterize these areas. Unlogged parts of the claims host stands of spruce and fir. The properties are snow-covered from mid- to late- October to late-May to early-June. Water for drilling is available from creeks in the lower elevations, but significant lengths of waterline may be required for drilling higher on the hills.

Previous Exploration

Imperial Oil Limited (Van Fraassen, 1978) explored the Cabin Creek phosphorites in 1977 and 1978. Imperial Oil undertook a program of mapping, sampling and percussion drilling. The sampling results are summarized below. The percussion drilling results, based on a total of 19 holes, were poor. Subsequent examination of the plots of the hole locations, strongly suggests several of the holes were collared in the footwall of the phosphorites. One intersection was obtained: Hole 23-7B, 21.8% P_2O_5 from 5.7 to 6.5 metres depth.

First Nuclear Corporation Limited (Hartley, 1982) explored the Cabin Creek phosphorites in 1981, undertaken a program of prospecting, mapping, hand-trenching and cat trenching. The prospecting program consisted of scintillometer survey to trace the surface projection of the phosphorites, utilizing the low-grade uranium content of the higher grade phosphorite. A total of 12 trenches were excavated either by hand or by D7 cat to sample the phosphorites at semi-regular intervals along strike. Further exploration, consisting of seismic surveys and drilling was recommended, but never followed through.

From sheet 082G 02E

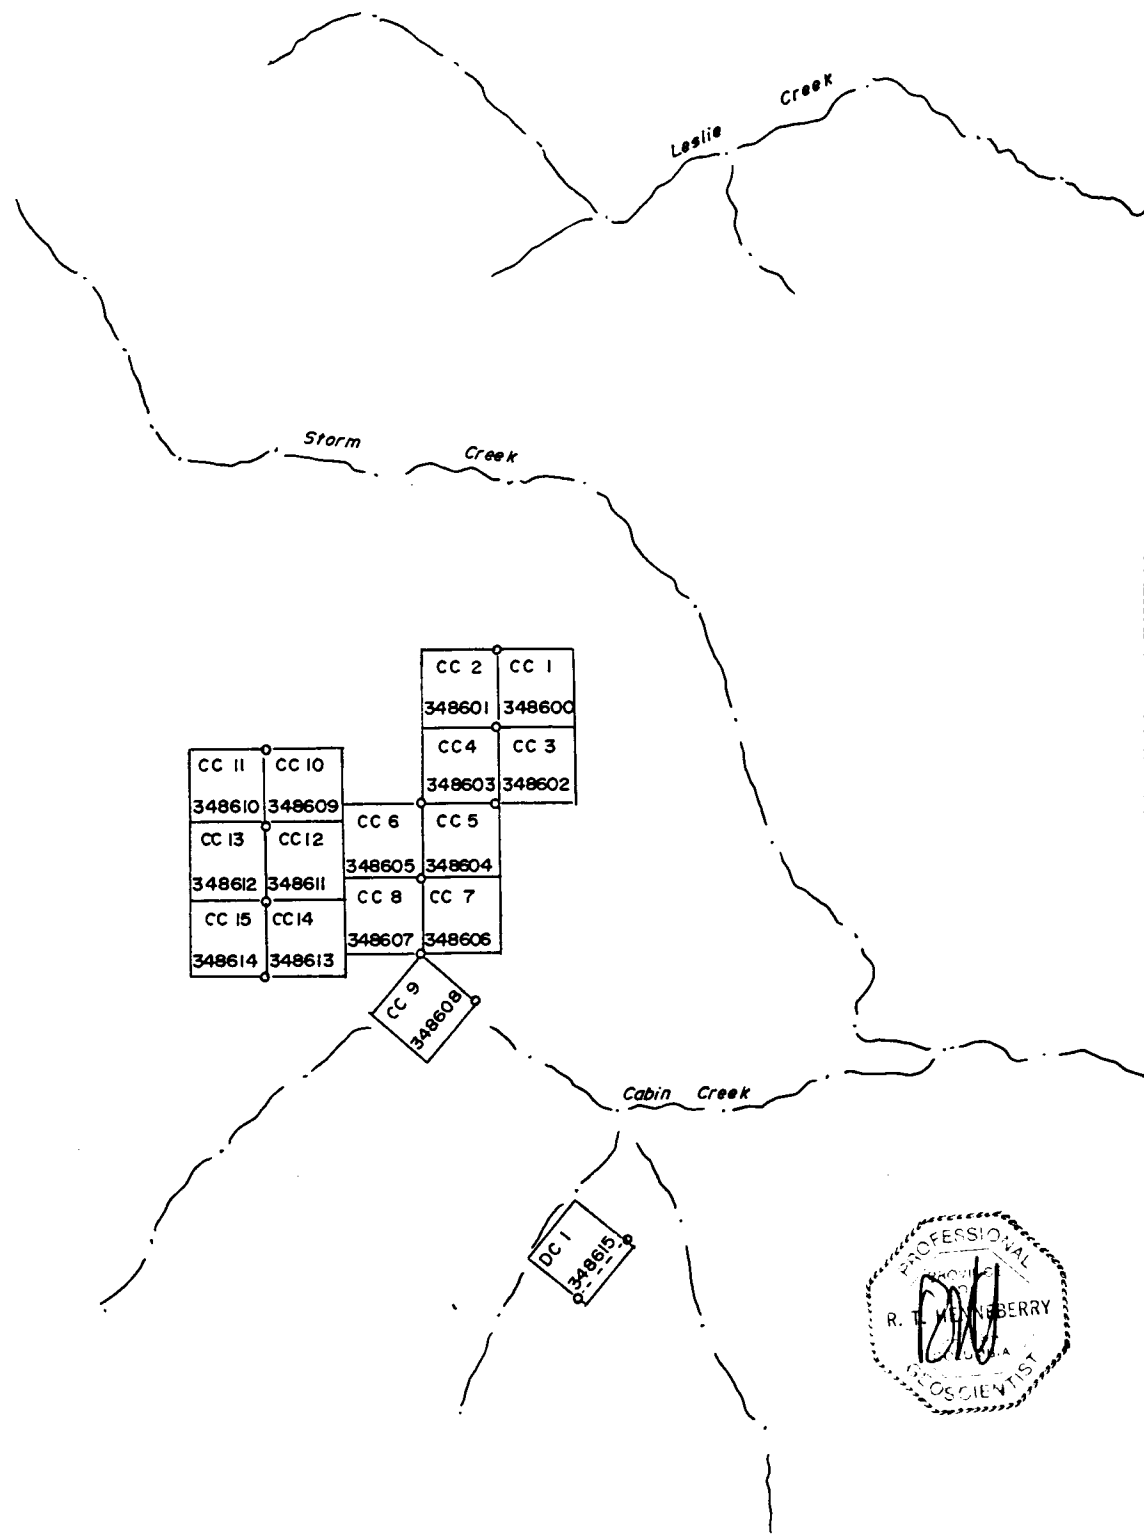

Mammoth Geological Ltd.
Fernie Phosphate Project
Cabin Creek Claim Locations



Drawn By: R.T. Henneberry
 Date: January 1997

Scale: 1:50,000
Figure 5

Assay Results from Sections Through the Cabin Creek Phosphate Horizon


Showing	Source	% P2O5	ppm Y	m width	Showing	Source	% P2O5	ppm Y	m width
West Band									
Cabin 1	Van Fraassen, 1978	18.05	--	0.98	JA-33	Hartley, 1982	12.39	--	1.75
CBC 89-22	Pell, 1990a	15.38	479	1.60	TR 89-12	Pell, 1990a	18.93	546	1.15
TR 89-11	Pell, 1990a	17.08	537	1.21	Cabin 3	Van Fraassen, 1978	20.00	--	0.75
LT	Hartley, 1982	13.68	--	2.50	AB	Hartley, 1982	20.97	--	2.00
CBC 89-35	Pell, 1990a	20.47	573	1.28	BA	Hartley, 1982	21.46	--	1.00
SP	Hartley, 1982	26.04	--	1.00	CBC 89-11	Pell, 1990a	21.81	579	0.95
SQ	Hartley, 1982	16.50	--	1.25	JH-226	Hartley, 1982	25.80	--	1.34
CBC 89-66	Pell, 1990a								
OT	Hartley, 1982	21.00	--	0.50					
Centre Band									
Cabin 2	Van Fraassen, 1978	21.20	--	1.59	TR 89-14	Pell, 1990a	26.53	805	grab
CS	Hartley, 1982	19.29	--	1.50	WE	Hartley, 1982	21.00	--	1.00
CBC 89-18	Pell, 1990a	19.90	602	1.60	CBC 89-01	Pell, 1990a	21.91	498	1.20
TR 89-10	Pell, 1990a	20.16	573	1.28	CBC 89Tr-01	Pell, 1990a	22.21	675	0.62
STS	Hartley, 1982	18.29	--	1.50					
East Band									
TB	Hartley, 1982	19.75	--	1.90					
DLY 89-01	Pell, 1990a								
DLY 89-13	Pell, 1990a								

Formosa Resources Corporation (Pell, 1990a) explored the Cabin Creek phosphorites in 1989. They undertook a program of mapping, sampling, hand trenching and backhoe trenching. Six hand trenches and five backhoe trenches were established, essentially confirming the continuity of structure and grade from the earlier work completed by Imperial Oil Limited (Van Fraassen, 1978) and First Nuclear Corporation (Hartley, 1982).

Geology (summarized from Pell (1990a))

The Cabin Creek occurrences are underlain by Permian through to Jurassic strata. The Permian Ranger Canyon Formation rocks are medium to thick-bedded, cream to buff to light-grey, or locally pink weathering, fine-grained sandstones, siltstones and dolomitic siltstones, with white to light grey fresh surfaces.


The Triassic Sulphur Mountain Formation rocks are predominantly buff, yellowish-brown and chocolate brown weathering, thin to medium bedded siltstones and shaley siltstones. Dark brown shale horizons with thin siltstone interlayers are common within the formation, particularly to the south of Cabin Creek.

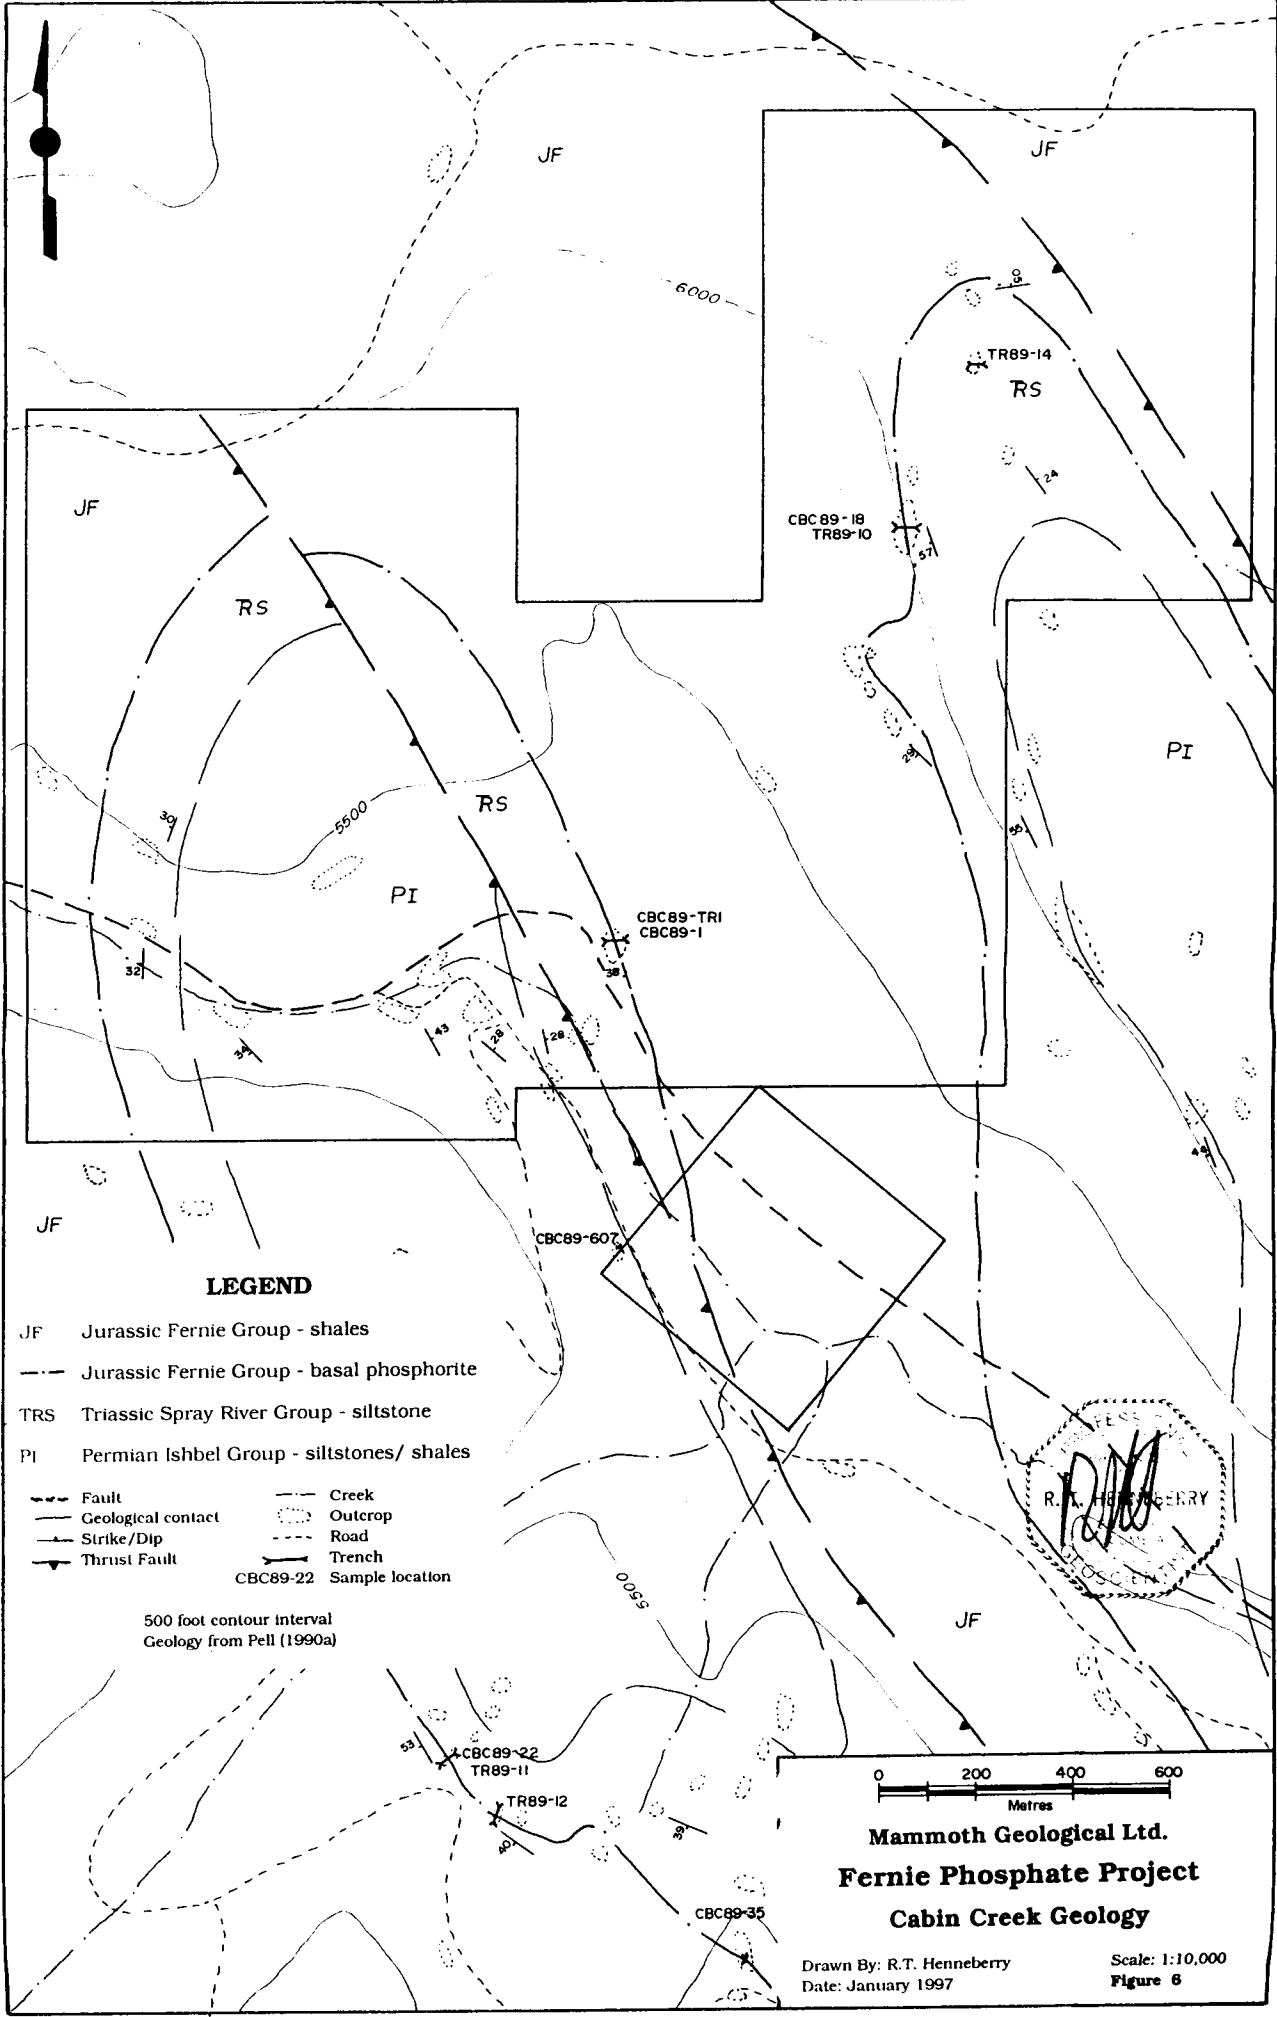

LEGEND

- JF Jurassic Fernie Group - shales
- Jurassic Fernie Group - basal phosphorite
- TRS Triassic Spray River Group - siltstone
- PI Permian Ishbel Group - siltstones/ shales
- Fault
- Geological contact
- Strike/Dip
- Thrust Fault
- Creek
- Outcrop
- Road
- Trench
- ★ CBC89-22 Sample location


500 foot contour interval
Geology from Pell (1990a)



Mammoth Geological Ltd.
Fernie Phosphate Project
Cabin Creek Geology

Drawn By: R.T. Henneberry
Date: January 1997

Scale: 1:10,000
Figure 6



Fernie Group rocks are recessive weathering and poorly exposed. Where the base of the Fernie Group is exposed, it is marked by a phosphorite horizon that is commonly 1.15-3.5 metres thick. Brown and black shales commonly overlie the phosphorites. The shales are overlain by black, brown and dark grey shales with interbedded buff to orange weathering dolostones, buff, fine-grained sandstones and light-grey limestones.

The basal phosphorite horizon generally consists of two poorly consolidated, gritty, pelletal phosphorite layers separated by 15cm to 60cm of brown shale containing a thin, intermediary phosphatic horizon.

In most trenches, the phosphorite horizon overlies buff to grey Triassic siltstone or sandstone. The base of the phosphorite horizon is a 25cm to 86cm silty to shaley phosphatic horizon, grading 6.5% to 13.25% P_2O_5 . Immediately above is a ± 60 cm, poorly consolidated, pelletal phosphorite grading 23.5% to 26.2% P_2O_5 . A thin chocolate shale horizon, 35cm to 60cm thick overlies the lower phosphorite. A second 15cm to 135cm phosphorite horizon, grading 20.7% to 27.7% P_2O_5 , overlies the shale. The phosphatic sequence is capped by a 2cm to 15cm thick yellow bentonite bed.

On the Cabin Creek claims, the stratigraphically complete measured sections average 17% to 20.5% P_2O_5 and 540 ppm to 710 ppm yttrium across an average thickness of 1.15 to 3.51 metres.

The structure of the Cabin Creek area is dominated by a series of northwest-southeast trending folds and thrust faults. Two anticlines, cored by thrust faults, and the intervening syncline have been mapped. Surface mapping has detailed an outcrop pattern, indicative of a double plunging anticline.

Pell (1990a) identified an area, on the limb of an anticline, where the dip of the phosphate bed and the hillside are roughly parallel. A second area, a large flat bench where the phosphorite is horizontal under 1 to 3 metres of overburden was also identified.

Preliminary Mineral Resource

A preliminary mineral resource has been calculated for the Cabin Creek phosphate horizons. This resource is cursory in nature and is meant to only give a preliminary estimate of contained metal values. The resource has been calculated based on 1:20,000 cross sections spaced at 500 metre intervals. The P_2O_5 and Y values assigned to the blocks are calculated based on the aforescribed sampling programs (Van Fraassen, 1978; Hartley, 1982; Pell, 1990a).

Values have been calculated to depths of 25, 50 and 100 metres. Earlier work has concentrated on locating a near surface, open-pittable or strippable deposit. The sections at this scale clearly show little material is available for open-pit mining. Sections of smaller areas at a more detailed scale (eg. 1:1000 to 1:2000) may locate such a zone.

Preliminary Mineral Resource Tonnage Summary for Cabin Creek Phosphorites

Area Block	m width	% P2O5	ppm Y	to 25 m depth	to 50 m depth	to 100 m depth
Cabin Creek West Band						
10000N to 8000N	1.20	na	na	16,800	33,600	67,200
8000N to 6000N	1.87	18.59	607	28,760	57,519	115,038
6000N to 4500N	1.41	19.68	598	36,390	72,779	145,558
10000N to 8500N	0.63	22.21	675	6,174	12,348	24,696
Cabin Creek Centre Band						
9500N to 8000N W	1.63	20.00	591	20,538	41,076	82,152
8000N to 6300N W	1.50	na	na	17,850	35,700	71,400
9500N to 8000N E	1.50	na	na	18,900	37,800	75,600
West Band Sub-Total	1.47	19.57	614	88,123	176,246	352,492
Centre Band Sub-Total	1.55	20.00	591	57,288	114,576	229,152
Cabin Creek Total	1.50	19.74	605	145,411	290,822	581,644

The grades are clearly within the range of operating phosphate mines in the western United States. The above average yttrium values may very well enhance the overall value of the deposit.

HUNGER LAKE

The Hunger Lake phosphate occurrence lies within the basal Fernie Formation phosphorite bed. This area was first explored in the late 1970's. One claim group (totaling 12 units) was staked to cover the strike projection of the phosphorite through the Leslie Creek Valley.

Claim Name	Record Numbers	Record Date
LC #1-#12	348616-348627	July 12, 1996

Location and Access

The Hunger Lake occurrence is located in the Fort Steele Mining Division, about 45 kilometres southeast of the town of Fernie in southeastern British Columbia. The occurrence is accessible by maintained then secondary logging roads with the maintained logging road leaving Highway 3 at the Morrissey Road turnoff.


The actual claims lie in the valley of upper Leslie Creek, accessible via the Ram Creek Forestry Road and its spurs. This road has been washed out approximately 3 kilometres from the Cabin Creek Forestry Road and will require some excavator work to re-establish 4X4 road access. The claims are presently accessible by foot or by 4 wheel drive ATVs.

Elevations range from 1675 metres to 2135 metres. Large areas have recently been clear-cut; grasses, small plants, fireweed and stumps characterize these areas. Unlogged parts of the claims host stands of spruce and fir. The Leslie Creek valley is snow-bound from mid- to late-October to early-June. Water for drilling is readily accessible from Leslie Creek.

Previous Exploration

Imperial Oil Limited (Van Fraassen, 1978) explored the Hunger Lake phosphorites in 1977 and 1978. Imperial Oil undertook a program of mapping, sampling and percussion drilling. The sampling results are summarized below. The percussion drilling results, based on a total of 13 holes, were poor. Subsequent examination of the plots of the hole locations, strongly suggests several of the holes were collared in the footwall of the phosphorites. One intersection was obtained: Hole 23-12, 13.5% P_2O_5 from 45.3 to 46.0 metres depth.

First Nuclear Corporation Limited (Hartley, 1982) explored the Hunger Lake phosphorites in 1981, undertaken a program of prospecting, mapping, hand-trenching and cat trenching. The prospecting program consisted of scintillometer survey to trace the surface projection of the phosphorites, utilizing the low-grade uranium content of the higher grade phosphorite. A total of 6 trenches were excavated either by hand or by D7 cat to sample the phosphorites at semi-regular intervals along strike. Further exploration, consisting of seismic surveys and drilling was recommended, but never followed through.

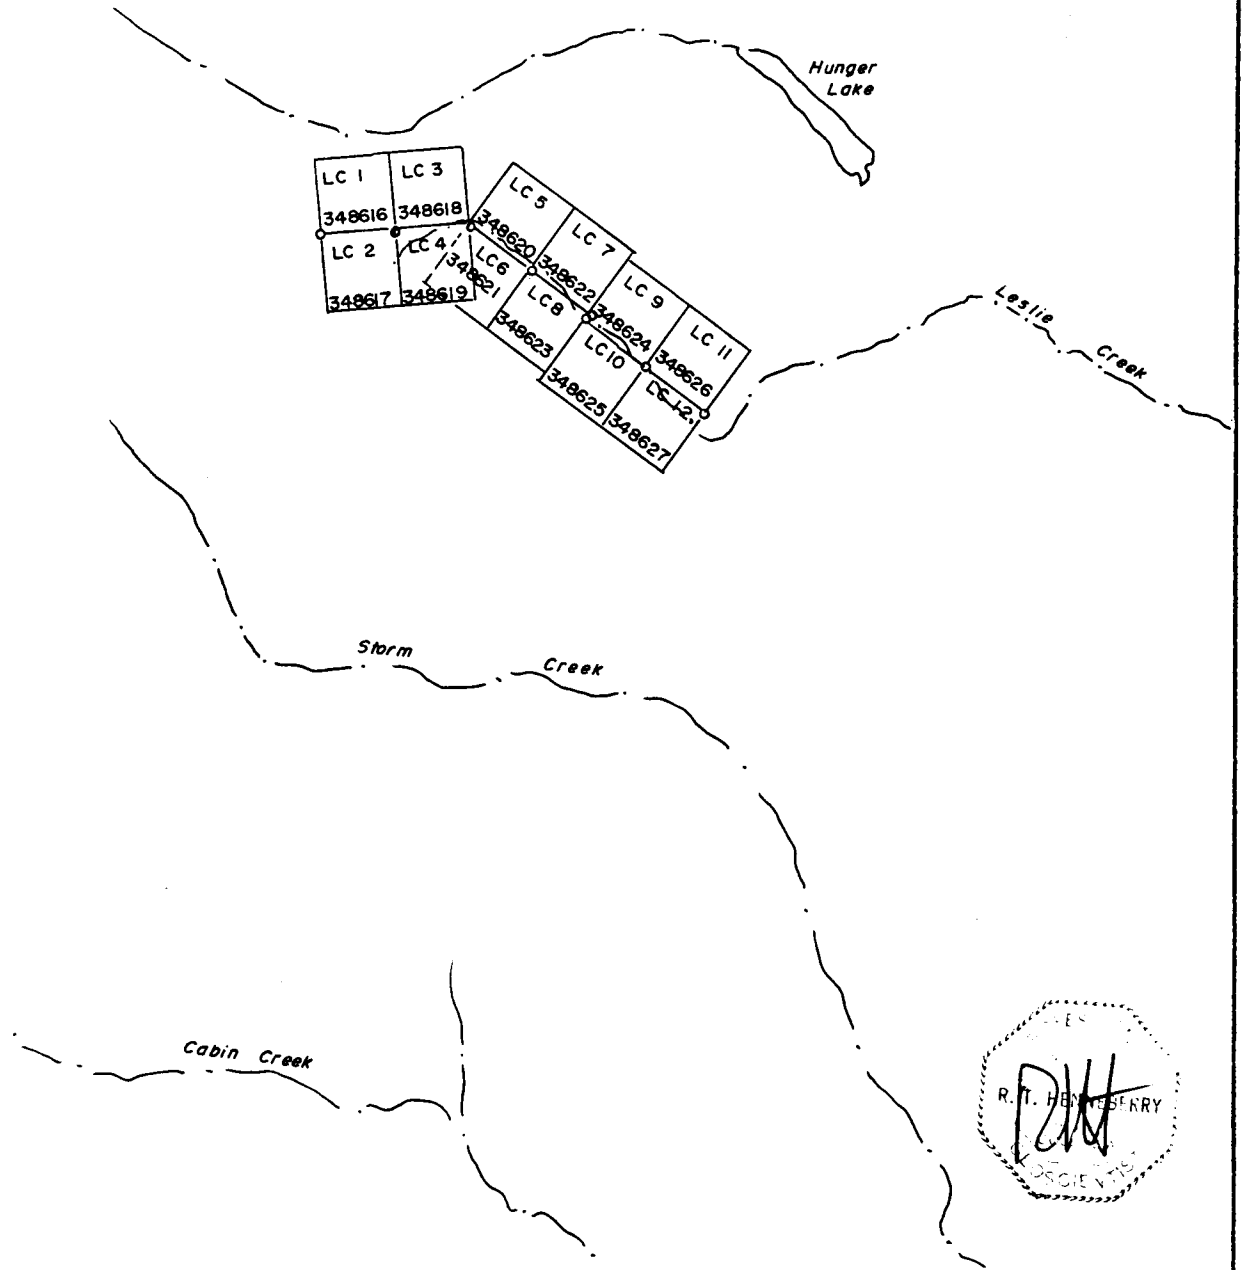

Mammoth Geological Ltd.
Fernie Phosphate Project
Hunger Lake Claim Locations



Drawn By: R.T. Henneberry
 Date: January 1997

Scale: 1:50,000
 Figure 7

Assay Results from Sections Through the Hunger Lake Phosphate Horizon

Showing	Source	% P2O5	ppm Y	m width	Showing	Source	% P2O5	ppm Y	m width
Hunger Band									
STN	Hartley. 1982	21.30	na	1.50	HGR 89-01	Pell. 1990b	14.25	399	1.32
					TR 89-08	Pell. 1990b	22.36	665	0.46
HGR 89-28	Pell. 1990b	14.13	327	0.59	TR 89-09	Pell. 1990b	17.25	559	1.08
TR 89-06	Pell. 1990b	20.18	529	0.98					
					TR 89-07	Pell. 1990b	16.25	508	1.20
RAM A	Hartley. 1982	18.32	na	1.50					
HGR 89-24	Pell. 1990b	27.07	751	0.82	HGR 89-21	Pell. 1990b	21.64	575	1.08
TR 89-05	Pell. 1990b	22.67	660	1.07	TR 89-03	Pell. 1990b	21.74	635	1.66
HGR 89-23	Pell. 1990b	na	na	na					
TR 89-04	Pell. 1990b	22.56	653	0.78	RAM B	Hartley. 1982	22.96	na	1.50
					HGR 89-19	Pell. 1990b	25.16	722	1.13
SCI	Hartley. 1982	32.30	na	0.25	TR 89-01	Pell. 1990b	18.95	591	1.26
					TR 89-02	Pell. 1990b	18.03	535	0.84
Hunger West									
DS	Hartley. 1982	17.83	na	1.00	Ram N	Van Fraassen. 1978	24.50	na	0.56
INV 89-01	Pell. 1990b	17.87	na	0.60	Ram S	Van Fraassen. 1978	22.00	na	0.28
INV 89-02	Pell. 1990b	23.74	690	0.51					

Formosa Resources Corporation (Pell, 1990b) explored the Hunger Lake phosphorites in 1989, undertaking a program of mapping, sampling, hand trenching and backhoe trenching. Eight hand trenches and nine backhoe trenches were established, essentially confirming the continuity of structure and grade from the earlier work completed by Imperial Oil Limited (Van Fraassen, 1978) and First Nuclear Corporation (Hartley, 1982).


Geology (summarized from Pell (1990b))

The Hunger Lake occurrence is underlain by Permian through to Jurassic strata. The Permian Ranger Canyon Formation rocks are massive, medium-bedded, white, grey or cream weathering, very fine-grained quartzose sandstones, siltstones and dolomitic siltstones.

The Triassic Sulphur Mountain Formation rocks are predominantly light yellowish-brown to medium brown weathering, medium- to thin-bedded siltstones, and calcareous or dolomitic light grey siltstones. In some areas, fine sandy beds are present within the siltstones, in others, dark brown shales and silty shales occur.

Fernie Group rocks are recessive weathering and poorly exposed. Where the base of the Fernie Group is exposed, it is marked by a phosphorite horizon that is commonly 1 metre thick. Overlying the phosphorites are monotonous fissile black shales. Much further up in the sequence, cream to light grey weathering siltstones and silty limestones, as well as shales and silty shales are present.

The basal phosphorite horizon generally consists of two poorly consolidated, gritty, pelletal phosphorite layers separated by 5cm to 25cm of chocolate brown shale.

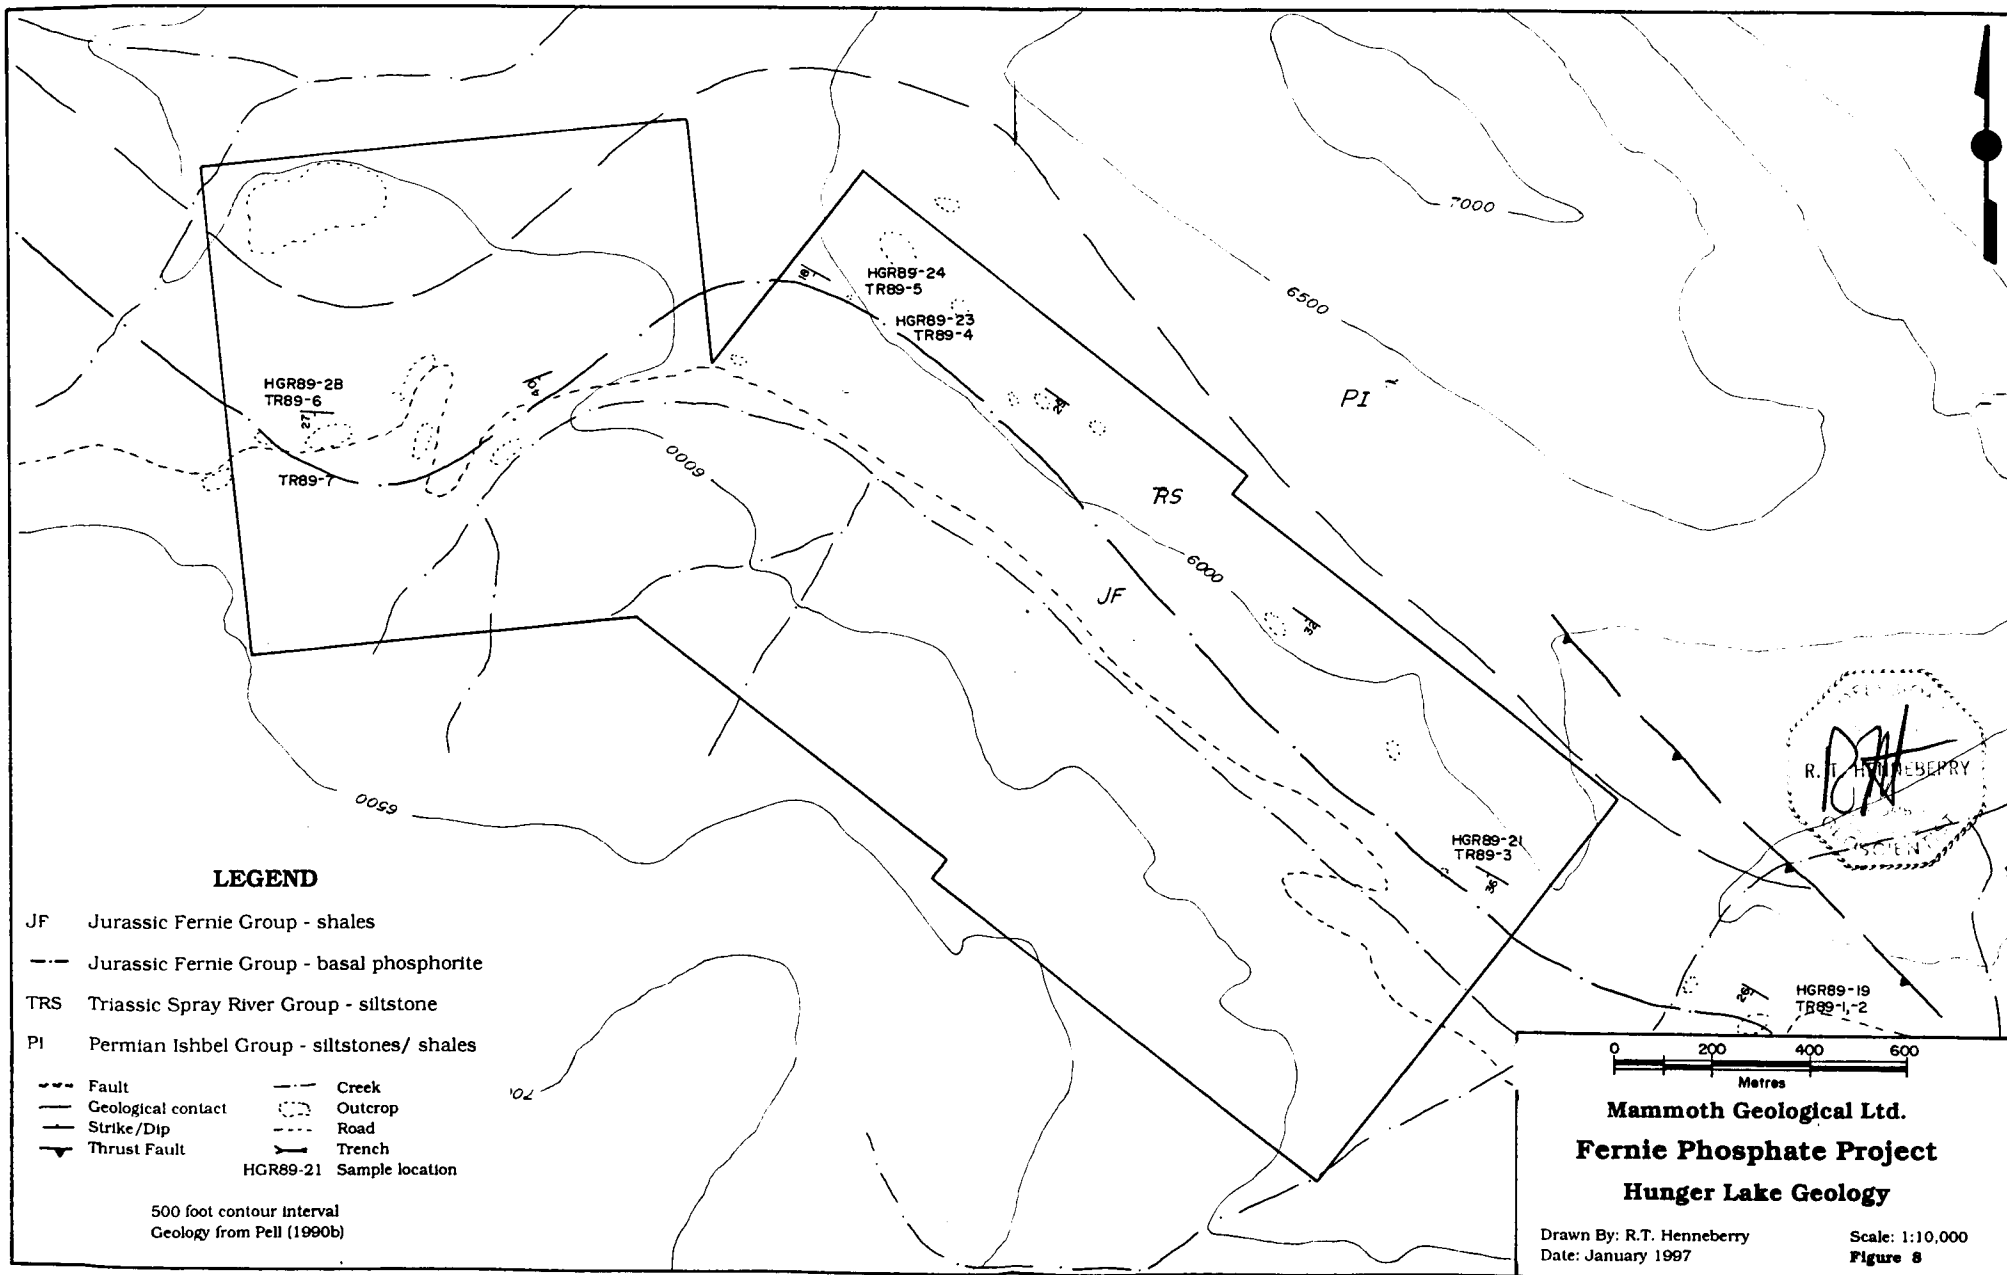

In most trenches, the phosphorite horizon overlies buff to grey Triassic siltstone or sandstone. The base of the phosphorite horizon is a 25cm to 86cm pelletal phosphorite to phosphatic shale horizon. Immediately above is a 5cm to 23cm chocolate to black shale. A second 18cm to 77cm pelletal, or in some cases nodular phosphorite horizon, overlies the shale. The phosphatic sequence is overlain by slightly phosphatic black or brown shales, that grade upwards into non-phosphatic rocks.

On the Hunger Lake claims, the stratigraphically complete measured sections averages 21% P₂O₅ and 620 yttrium across an average thickness of 1.00 metres.

The structure of the Hunger Lake area is dominated by a series of northwest-southeast trending folds and thrust faults. The actual claims cover the northeast limb of a syncline, that is part of a series of northwest - southeast series of anticlinal and synclinal folds.

The phosphate horizon at the Hunger Lake occurrence outlines broad, open folds and throughout most of the area, is present as a shallow, southwest dipping layer. On the eastern half of the property Pell (1990b) mapped the phosphate horizon in a near dip-slope situation, dipping into the valley at an angle which is slightly steeper than the hillside.

Preliminary Mineral Resource

A preliminary mineral resource has been calculated for the Hunger phosphate horizon. This resource is cursory in nature and is meant to only give a preliminary estimate of contained metal values. The resource has been calculated based on 1:20,000 cross sections spaced at 500 metre intervals. The P₂O₅ and Y values assigned to the blocks are calculated based on the aforescribed sampling programs (Van Fraassen, 1978, Hartley, 1982; Pell, 1990b).

Preliminary Mineral Resource Tonnage Summary for Hunger Lake Phosphorites

Area Block	m width	% P ₂ O ₅	ppm Y	to 25 m depth	to 50 m depth	to 100 m depth
Hunger Lake Band						
20500N to 19000N	0.84	19.32	567	8,820	17,640	35,280
19000N to 17000N	1.03	19.80	565	17,276	34,552	69,104
17000N to 15300N	1.19	21.26	617	15,044	30,089	60,178
Hunger Lake Total	1.05	20.24	586	41,140	82,281	164,562

Values have been calculated to depths of 25, 50 and 100 metres. Earlier work has concentrated on locating a near surface, open-pittable or strippable deposit. The sections at this scale clearly show little material is available for open-pit mining. Sections of smaller areas at a more detailed scale (eg. 1:1000 to 1:2000) may locate such a zone.

The grades are clearly within the range of operating phosphate mines in the western United States. The above average yttrium values may very well enhance the overall value of the deposit.

1996 EXPLORATION PROGRAM

The aim of the 1996 exploration program was two-fold. The first phase was to acquire by staking the key sections of the Barnes Lake, Cabin Creek and Hunger Lake phosphate occurrences. The second phase was to complete a backhoe trenching program to supply sufficient material for bench scale metallurgical tests from each of the three properties, as well as fill in holes in the geological mapping and sampling. The trenching was designed to test previous untested areas to confirm structure and grade to increase confidence in the mineral resource calculations.

The property acquisition phase was completed in mid-July, acquiring the 6 claim groups as follows:

Occurrence	NTS Sheet	Claims	Record Numbers	Expiry Date
Barnes Lake	082G/07E	BL #1-#12	348582-348593	July 16, 1997
		MC #1-#6	348594-348599	July 15, 1997
Cabin Creek	082G/02E	CC #1-#9	348600-348608	July 13, 1997
		CC #10-#15	348609-348614	July 14, 1997
		DC #1	348615	July 14, 1997
Hunger Lake	082G/02E	LC #1-#12	348616-348627	July 12, 1997

The properties were walked and examined as part of the staking process, verifying the trench locations and verifying the competent geological mapping completed by Jennifer Pell for Formosa Resources Corporation (Pell, 1990a; 1990b; 1990c).

Very little of the basal phosphorites actually outcrop on the properties. No samples were taken during the staking phase. The sampling program was planned during the backhoe sampling program when the basal phosphorites would be opened in the trenches. Therefore, little new information was added to the present knowledge base at the completion of the staking phase.

Notices of Work (NOW's) for each of the claim groups were filed immediately after staking. These NOW's described the planned second stage program of small scale backhoe trenching to supply the required material for metallurgical tests and to fill in areas to add confidence to the preliminary resource estimates.

The District Engineer would not issue the necessary permits without a significant security deposit. This deposit was not attainable by the author, and hence, the second stage program was not undertaken.

The correspondence between the District Engineer and the author is appended, as are the NOW's.

A total of 14 man days were spent the field on stage one of the phosphate project in 1996. July 11 and July 12 (four man days) were spent on the Hunger Lake occurrence. July 13 and July 14 (four man days) were spent on the Cabin Creek occurrence. July 15, July 16 and July 17 (six man days) were spent on the Barnes Lake occurrence.

DISCUSSION

The results obtained to date on each of the phosphate properties warrants further work. Little additional geological mapping should be required, as the Formosa Resources Corporation 1989-1990 mapping program was competently done. The hand and backhoe trenching completed by Formosa Resources Corporation both confirmed the results of earlier exploration, and identified target areas within the phosphorite beds on each of the properties.

The exploration programs completed to date have generally been concentrated on the readily accessible, near surface sections of the phosphorites. This is reflected in the mineral resource estimates, including only the first 25 metres of depth.

Preliminary Shallow Mineral Resource Tonnage Estimate Summary

Property	Source	width	%P2O5	ppmY	to 25 m
Barnes Lake	Dales (1978)	1.00	27.00	na	288,000 *
Cabin Creek	this report	1.50	19.74	605	145,411
Hunger Lake	this report	1.05	20.24	586	41,140

* Barnes Lake resource estimate is to 18 metres depth

Butrenchuk (1996) expanded on this work in a general way, estimating the total mineral resource potential of the phosphorite horizons for each of the areas based on total exposed strike length and average width. The calculations were based on a specific gravity of 2.8. He combined the Cabin Creek and Hunger Lake occurrences to obtain one estimate for the entire Cabin Creek area.

Cabin / Hunger resource potential	34 million tons to 300 metres depth
Barnes resource potential	11 million tons to 100 metres depth

Working backwards from the resource total, a figure for potential tonnage per claim unit can be obtained utilizing Butrenchuk's data in combination with some simple assumptions. The first assumption is the phosphorite horizon strikes continuously across the entire claim unit roughly parallel to one of the boundaries, yielding a length of 500 metres. The second assumption is the sequence is not repeated (meaning two or more horizons per claim).

Based on these assumptions, one 500 metre claim unit could contain 420,000 tonnes of phosphorite resources to a depth of 300 metres, or 140,000 tonnes of phosphorite resources to a depth of 100 metres.

Three aspects need to be addressed in bringing these deposits along to the production stage: a program of further property acquisition, an increase in the confidence level of the preliminary resource estimates through a combination of percussion or rotary drilling and bulk testing, and beneficiation testing of the phosphate rock to produce saleable products.

A mining situation on any of the three properties will more than likely be, at least initially, a strip mining / open cut operation. The phosphorite will be mined along strike to a shallow depth (± 25 metres or 75 feet). This will likely result in one or more long, narrow trenches, following the phosphorite bed across topography.

A mining plan could easily be realized where the overburden and waste ahead is used to backfill the open cut behind, in much the same manner as placer mining follows the pay streak up the creek valley. This type of mining plan will have minimal environmental impact. This plan will, however, require long claim blocks along the surface strike projections of the phosphorite beds.

An aggressive program of property acquisition should be undertaken to acquire and hold long, continuous sections of the phosphorite horizons along strike. There is little need to hold more than one or two claim lengths of width across the phosphorite beds. Therefore, the acquisition should concentrate on two-post claims centred on the phosphorite beds, following them along strike. Utilizing the phosphorite tonnage per claim unit figures, a minimum of eighty claim units will be required to acquire Butrenchuk's (1996) Cabin Creek area resource. A minimum of eighty units will also be required to encompass Butrenchuk's (1996) Barnes Lake resource, though 50 units in each area would be sufficient at this stage.

The second aspect (confirmation of resource estimate) and third aspect (beneficiation) are essentially interchangeable, though at this stage the beneficiation should be addressed first. Addressing it will also complete much of the resource estimate confirmation.

The recent research and development in leaching of phosphate ores (Judd et al, 1986; Wilemon and Scheiner, 1987; Habashi, 1994) should be vigorously investigated.

Sufficient phosphorite material from each of the properties will be required to carry out the testing required to ascertain the merits of leaching the Fernie phosphorites. It is imperative to obtain representative samples from each of the properties. The best way to supply an adequate supply of representative phosphorite material is to open a number of trenches at regular intervals along strike, across the phosphorite horizon. A similar amount of phosphorite, for example 1 or 2 five gallon pails, would be collected from each trench. This material can then be mixed and a number of cuts from the mixed pile can be taken for testing.

Each of the trenches will be mapped, photographed, sampled, and assayed to complete part of the reserve confirmation program.

Positive results from the metallurgical testing and trenching should result in a pilot scale test, where larger volumes of phosphorite material will be required.

After completion of the trenching, only the continuation of the phosphorite down dip (to depth) will need to be evaluated. The longer term mining plan will envision either deepening the open cuts or going underground. A program of percussion or rotary drilling should be undertaken to test the phosphorites to depth. Previous exploration programs in the Fernie Basin have had mixed results with diamond drilling, so rotary drilling (where all the cutting are brought to the surface) should be the method of choice.

There is some debate at present with respect to decreases in P_2O_5 grade with depth. In his 1996 compilation, Butrenchuk (1996) reports that there are large discrepancies between surface samples and drill intersections at both Line Creek and Barnes Lake, suggesting a phenomenon where P_2O_5 content is enhanced in the zone of weathering when soluble gangue minerals are dissolved and carried away. A review of all properties described in Butrenchuk (1996) show there are as many or more properties where the surface grade and drill hole intersection grade (or underground grade) is similar (for example, Crow, Fording River, Cabin Creek). Further investigation is required, as the possibility exists these discrepancies are due to the method of drilling (diamond drilling versus rotary drilling versus percussion drilling).

CONCLUSIONS AND RECOMMENDATIONS

Three industrial mineral properties have been acquired in the Jurassic Fernie Basin of southeastern British Columbia. The Barnes Lake, Cabin Creek and Hunger Lake sedimentary phosphorite horizons contain a combined potential mineral resource in excess of 45 million tonnes, according to the recent government publication of British Columbia phosphorites (Butrenchuk, 1996).

Earlier exploration programs on the Barnes Lake, Cabin Creek and Hunger Lake claim groups concentrated on the near surface strippable or open-cuttable potential of the phosphorites. Mapping, sampling, hand trenching and backhoe trenching proved the 1.0m to 1.5m phosphorite horizon at the base of the Jurassic Fernie Formation to be continuous along strike. Average grades in the range of 20% P_2O_5 and 600 ppm yttrium were obtained. Preliminary mineral resource estimates in the range of 50,000 to 300,000 tonnes were calculated to 25 metres depth.

Metallurgical testing to date has not yet produced satisfactory concentrates. Most of the testing has concentrated on grinding and flotation. Recent research and development has focussed on leaching the raw phosphorites to recover both the phosphate and the contained rare earth elements, predominantly yttrium, with reasonable success.

A staged, three phase exploration program is recommended for the Fernie Phosphorite Project. The first stage is additional property acquisition. The present property base of 48 units should be expanded to at least 110 units to cover most of the Butrenchuk (1996) phosphorite resource. The cost of acquiring the additional claim units is estimated at \$10,097.

The second phase involves metallurgical testing. A series of backhoe trenches will be opened at regular intervals along the strike of the phosphorite horizon. Two 5 gallon pails of phosphorite material will be gathered for each trench. All trenches will be mapped, photographed and sampled. The series of pails from each property will be mixed to supply the material required for two bench scale metallurgical tests for each of the three properties. Phase II is estimated to cost \$45,678.

The third phase involves proving up the near surface resources and expanding them to a depth of at least 50 metres by rotary drilling. A total of 4,000 feet (1220 metres) is budgeted for each of the three properties. Total cost of the drilling is estimated at \$281,785.

REFERENCES

- Altschuler, Z.S., Berman, S. and Cuttitta, F. (1967). Rare earths in phosphorites - Geochemistry and potential recovery. United States Geological Survey Professional Paper 575B. pp.B1-B9.
- Barry, G.S. (1987). Phosphate. Canadian Mining Journal, February 1987. pp.65-66.
- Butrenchuk, S.B. (1987). Phosphates in southeastern British Columbia (82G and 82J). British Columbia Ministry of Energy, Mines and Petroleum Resources Open File 1987-16. 103p.
- Butrenchuk, S. (1996). Phosphate Deposits in British Columbia. British Columbia Ministry of Employment and Investment, Energy and Minerals Division, Geological Survey Branch, Bulletin 98. 126p.
- Cantrell, R. (1995). Phosphate Rock, Annual Review 1994. United States Department of the Interior, Bureau of Mines, Mineral Industry Survey. 16p.
- Castor, S.B. (1994). Rare Earth Minerals. In: Industrial Minerals and Rocks, 6th Edition. D.D.Carr, Senior Editor. Society of Mining, Metallurgy and Exploration Inc. pp.827-839.
- Christie, R.L. (1978). Sedimentary phosphate deposits - An interim review. Geological Survey of Canada Paper 78-20. 9p.
- Corder, W.C. (1972). Final Report on an Economic Analysis of Processing Alternatives for Production of Phosphate and Rare-Earth Products from the Lodgepole - Cabin Creek Deposit. Private Report for Excalibur Explorations, Limited by Battelle. 36p.
- Dales, G.D. (1978). Report on core drilling - PH and WW group claims. British Columbia Ministry of Energy, Mines and Petroleum Resources Assessment Report 6859.
- Dorian, N. (1975). Refraction seismic survey on the Flathead phosphate claims. British Columbia Ministry of Energy, Mines and Petroleum Resources Assessment Report 5556.
- Fantel, R.J., Anstett, T.F., Peterson, G.R., Porter, K.E. and Sullivan, D.E. (1984). Phosphate availability - World. United States Bureau of Mines Information Circular 8989. 65p.
- GEM (1969) to GEM (1972). British Columbia Department of Mines and Petroleum Resources, Geology, Exploration and Mining in British Columbia for 1969 to 1972.
- Gurr, T.M. (1996). Phosphate Rock. Mining Engineering. Volume 48, number 6. pp. 30-31.
- Habashi, F. (1994). Phosphate Fertiliser Industry, Processing Technology. Industrial Minerals, March 1994. pp.65-69.
- Hartley, G.S. (1982). Investigation of phosphate mineralization on the Cabin Creek claims #1-45 and on the Zip #1 claim, NTS 82G/2 and G/7. British Columbia Ministry of Energy, Mines and Petroleum Resources Assessment Report 10135.
- Hartman, F.H. and Wyman, R.A. (1974). Beneficiation of Phosphate Rock from Fernie, British Columbia. Energy, Mines and Resources Canada, Investigation Report IR74-37. 22p.
- Heffernan, K.J. (1978). Drilling Report for Lodge 1 Claim in the Fort Steele Mining Division. British Columbia Ministry of Energy, Mines and Petroleum Resources Assessment Report 7616.

Judd, J.C., Sandberg, R.G. and Huiatt, J.L. (1986). Recovery of Vanadium, Uranium and Phosphate from Idaho Phosphorite Ores. United States Bureau of Mines, Report of Investigations 9025. 15p.

Kenny, R.L. (1977). Exploration for Phosphate in Southeastern British Columbia by Cominco Ltd. Canadian Institute of Mining and Metallurgy Annual Meeting, 1977, Ottawa, Ontario. 18p.

King, D.E.C. (1986). Rare Earths. Canadian Minerals Yearbook 1986, Review and Outlook, Mineral Report 35. pp.50.1-50.10.

Krauss, U.H., Henning, G.S. and Schmidt, H.W. (1984). International Strategic Minerals Inventory Summary Report - Phosphate. United States Geological Survey Circular 930-C. 41p.

MMAR (1968). British Columbia Department of Mines and Petroleum Resources Annual Report for 1968.

Pell, J. (1990a). Geological, lithogeochemical and trenching report on the Cabin Creek group (Cabin Creek 1-16 claims) Columbia Project. British Columbia Ministry of Energy, Mines and Petroleum Resources Assessment Report 19954.

Pell, J. (1990b). Prospecting, geological, lithogeochemical and trenching report on the Hunger group (Hunger 1-12 claims) and Bighorn group (Bighorn 1, 2 claims) Columbia Project. British Columbia Ministry of Energy, Mines and Petroleum Resources Assessment Report 19938.

Pell, J. (1990c). Geological, lithogeochemical and trenching report on the Barnes 1-6 claims Columbia Project. British Columbia Ministry of Energy, Mines and Petroleum Resources Assessment Report 20872.

Pelzer, M.A. (1977). Geological and drilling report, 1977 field work, phosphate properties, Flathead area, British Columbia. British Columbia Ministry of Energy, Mines and Petroleum Resources Assessment Report 6365.

Russell, A. (1987). Phosphate rock: Trends in processing and production. Industrial Minerals Bulletin, September 1987. pp.25-59.

Stowasser, W.E. (1988). Phosphate rock. United States Bureau of Mines Phosphate Rock Minerals Yearbook. 15p.

Stowasser, W.E. (1985). Phosphate rock. United States Bureau of Mines Bulletin 675. pp.579-594.

Van Fraassen, M.A. (1978). 1978 drilling and geology report for Cabin #1, 2, 3 and Ram #1 & 2 claims, Fort Steele Mining Division, NTS 82G/2. British Columbia Ministry of Energy, Mines and Petroleum Resources Assessment Report 7617.

Wilemon, G.M. and Scheiner, B.J. (1987). Leaching of Phosphate Values from two Central Florida Ores using H_2SO_4 -methanol mixtures. United States Department of the Interior, Report of Investigations 9094. 9p.

STATEMENT OF QUALIFICATIONS

I, R. Tim Henneberry, am the principle of Mammoth Geological Ltd., a geological consulting firm with offices at 9250 Carnarvon Road, Port Hardy, B.C. The mailing address is Box 5250, Port Hardy, B.C. VON 2P0

I earned a Bachelor of Science Degree majoring in geology from Dalhousie University, graduating in May 1980.

I have practiced my profession continuously since graduation.


I am registered with the Association of Professional Engineers and Geoscientists in the Province of British Columbia as a Professional Geoscientist. I am also a Fellow of the Geological Association of Canada.

I am the registered owner of the following claim groups: BL #1-#12 (record numbers 348582-348593), MC #1-#6 (record numbers 348594-348599), CC #1-#15 (record numbers 348600-348614), DC #1 (record number 348615) and LC #1-#12 (record numbers 348616-348627)

I examined and staked the aforementioned claim groups between July 11 and July 17, 1996.

This report may be used for any purpose normal to the business of Mammoth Geological Ltd., provided no part is used in such a manner to convey a meaning different than that set out in the whole.

Dated this 6th day of January in the Town of Port Hardy, British Columbia.


R. Tim Henneberry, P. Geo

APPENDIX

Cabin Creek Resource Calculations
Hunger Lake Resource Calculations
Cabin Creek Plan and Sections
Hunger Lake Plan and Sections
1996 Claim Affidavits and Staking Sketches
1996 Notice of Works Applications and Correspondence

CABIN CREEK MINERAL RESOURCE

Area Block	m width	% P2O5	ppm Y	25 m depth	50 m depth	100 m depth
West Band						
10000N to 8000N	1.20	--.--	---	16,800	33,600	67,200
8000N to 6000N	1.87	18.59	607	28,760	57,519	115,038
6000N to 4500N	1.41	19.68	598	36,390	72,779	145,558
10000N to 8500N	0.63	22.21	675	6,174	12,348	24,696
Sub-Total		19.57	614	88,123	176,246	352,492
Centre Band						
9500N to 8000N W	1.63	20.00	591	20,538	41,076	82,152
8000N to 6300N W	1.50	--.--	---	17,850	35,700	71,400
9500N to 8000N E	1.50	--.--	---	18,900	37,800	75,600
Sub-Total		20.00	591	57,288	114,576	229,152
CABIN CREEK TOTAL		19.74	605	145,411	290,822	581,644

CABIN CREEK MINERAL RESOURCE

West Band Calculations

10000N to 8000N
 m length 200 1.20 16,800 33,600 67,200

8000N to 6000N
 m length 220 1.87 18.59 607 28,760 57,519 115,038

1.21 17.08 537
 1.15 18.93 546
 1.60 15.38 479
 3.51 20.47 709

6000N to 4500N
 m length 370 1.41 19.68 598 36,390 72,779 145,558

1.86 18.59 607
 0.95 21.81 579

10000N to 8500N
 m length 140 0.63 22.21 675 6,174 12,348 24,696

0.63 22.21 675

Centre Band Calculations

9500N to 8000N W
 m length 180 1.63 20.00 591 20,538 41,076 82,152

1.98 19.90 602
 1.28 20.16 573

8000N to 6300N W
 m length 170 1.50 17,850 35,700 71,400

9500N to 8000N E
 m length 180 1.50 18,900 37,800 75,600

HUNGER LAKE MINERAL RESOURCE

Area Block	m width	% P2O5	ppm Y	25	50	100
				m depth	m depth	m depth
20500N to 19000N	0.84	19.32	567	8,820	17,640	35,280
19000N to 17000N	1.03	19.80	565	17,276	34,552	69,104
17000N to 15300N	1.19	21.26	617	15,044	30,089	60,178
HUNGER LAKE TOTAL		20.24	586	41,140	82,281	164,562

HUNGER LAKE MINERAL RESOURCE

Hunger Lake Calculations

20500N to 19000N

m length 150 0.84 19.32 567 8,820 17,640 35,280

0.46 22.36 665

1.08 17.25 559

0.98 20.18 529

19000N to 17000N

m length 240 1.03 19.80 565 17,276 34,552 69,104

0.98 20.18 529

1.20 16.25 508

1.32 14.25 399

1.07 22.67 660

0.78 22.56 653

0.82 27.07 751

17000N to 15300N

m length 180 1.19 21.26 617 15,044 30,089 60,178


1.66 21.74 635


1.08 21.64 575

1.26 18.95 591

1.13 25.16 722

0.84 18.03 535

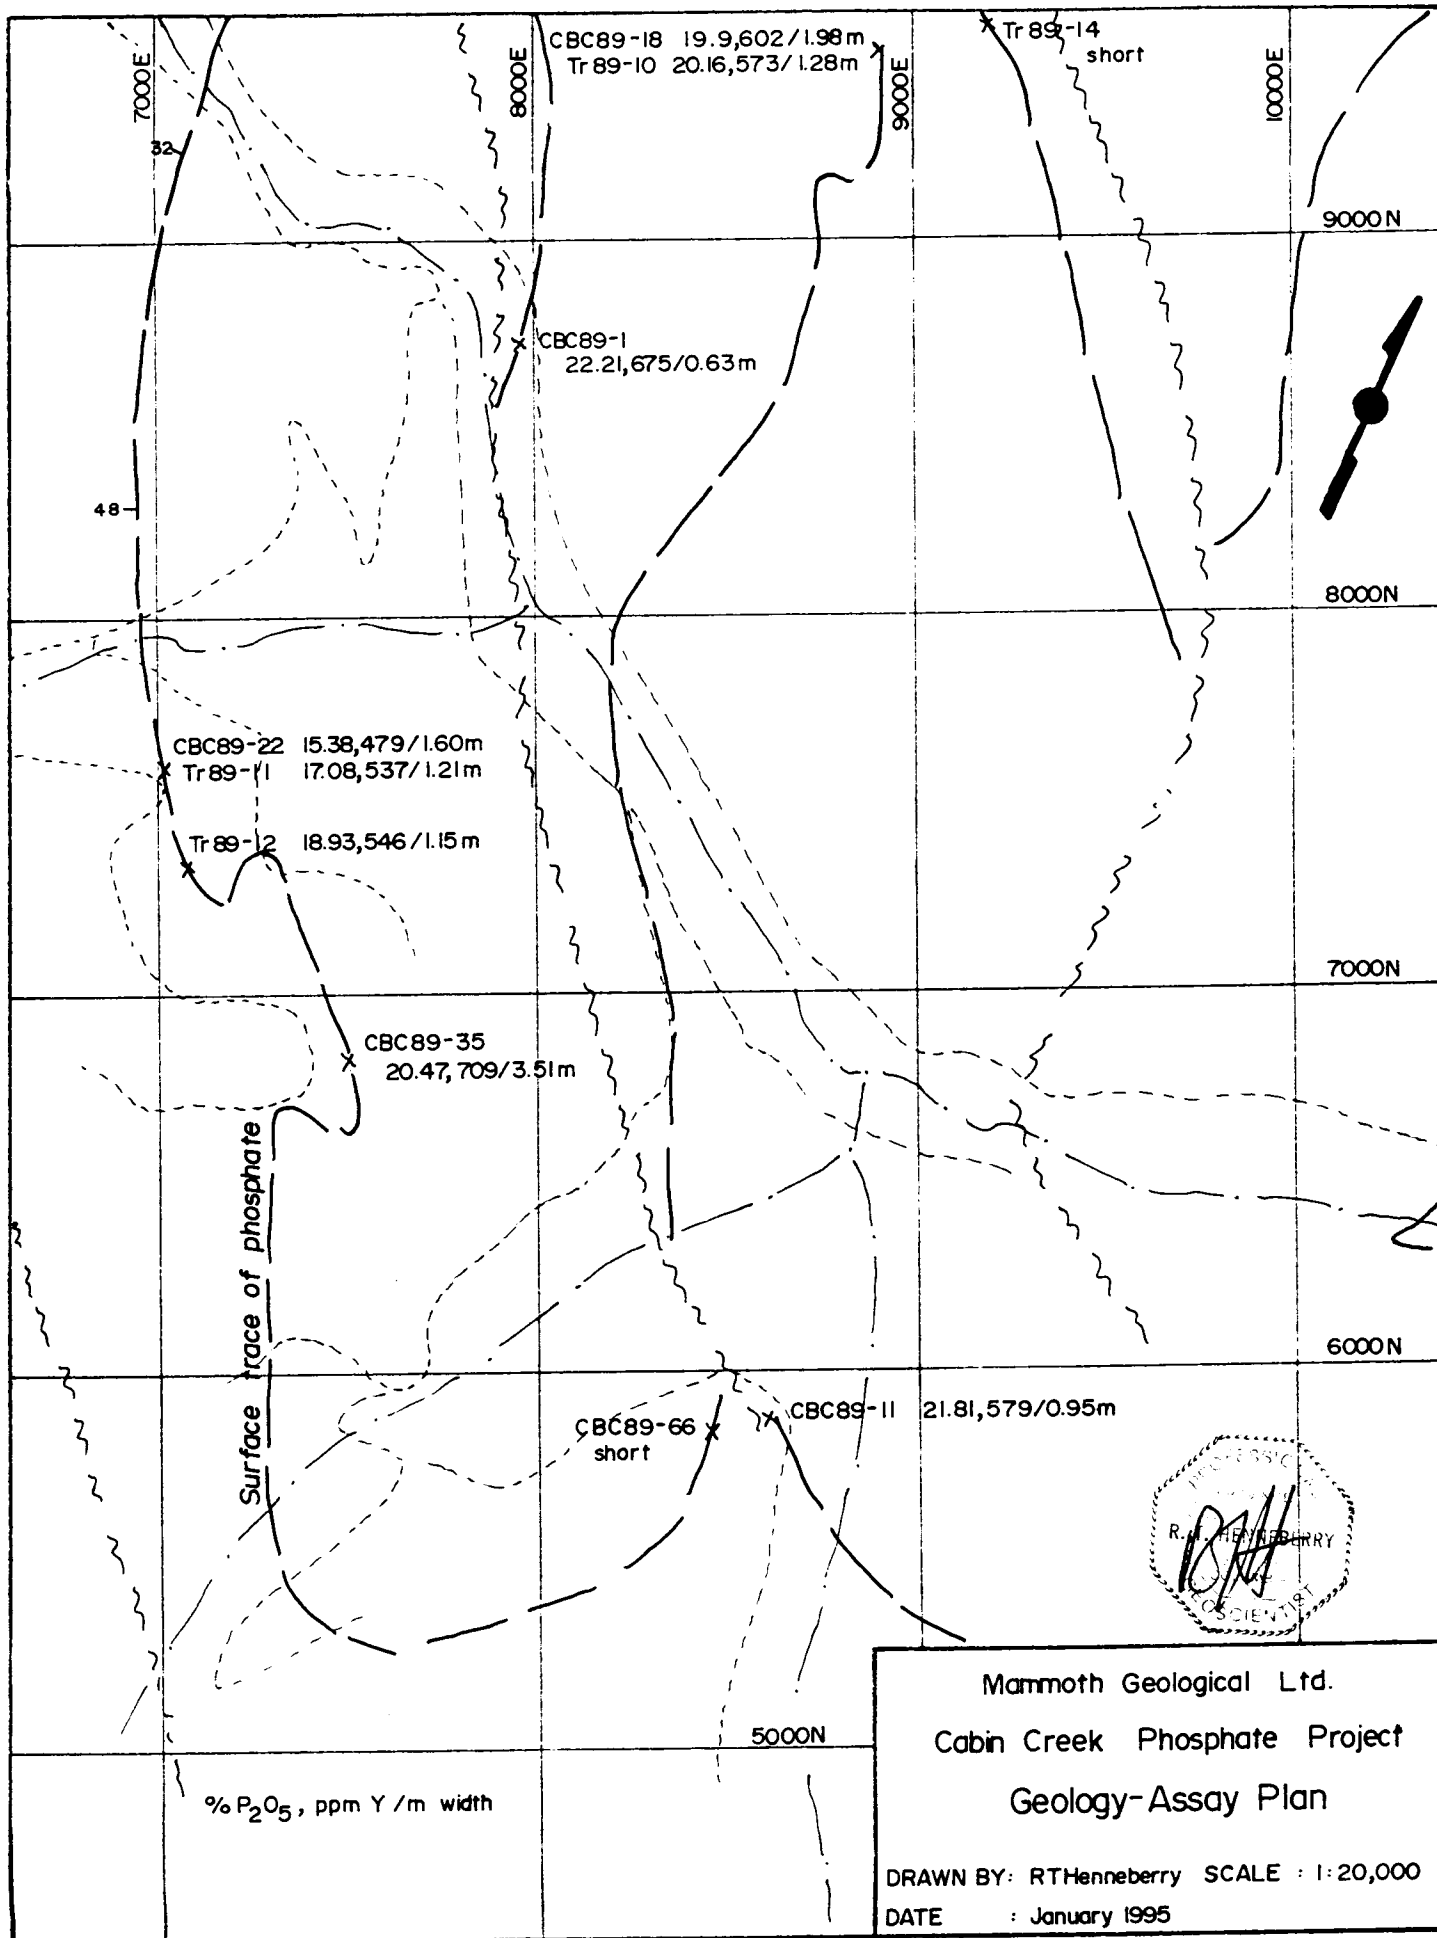

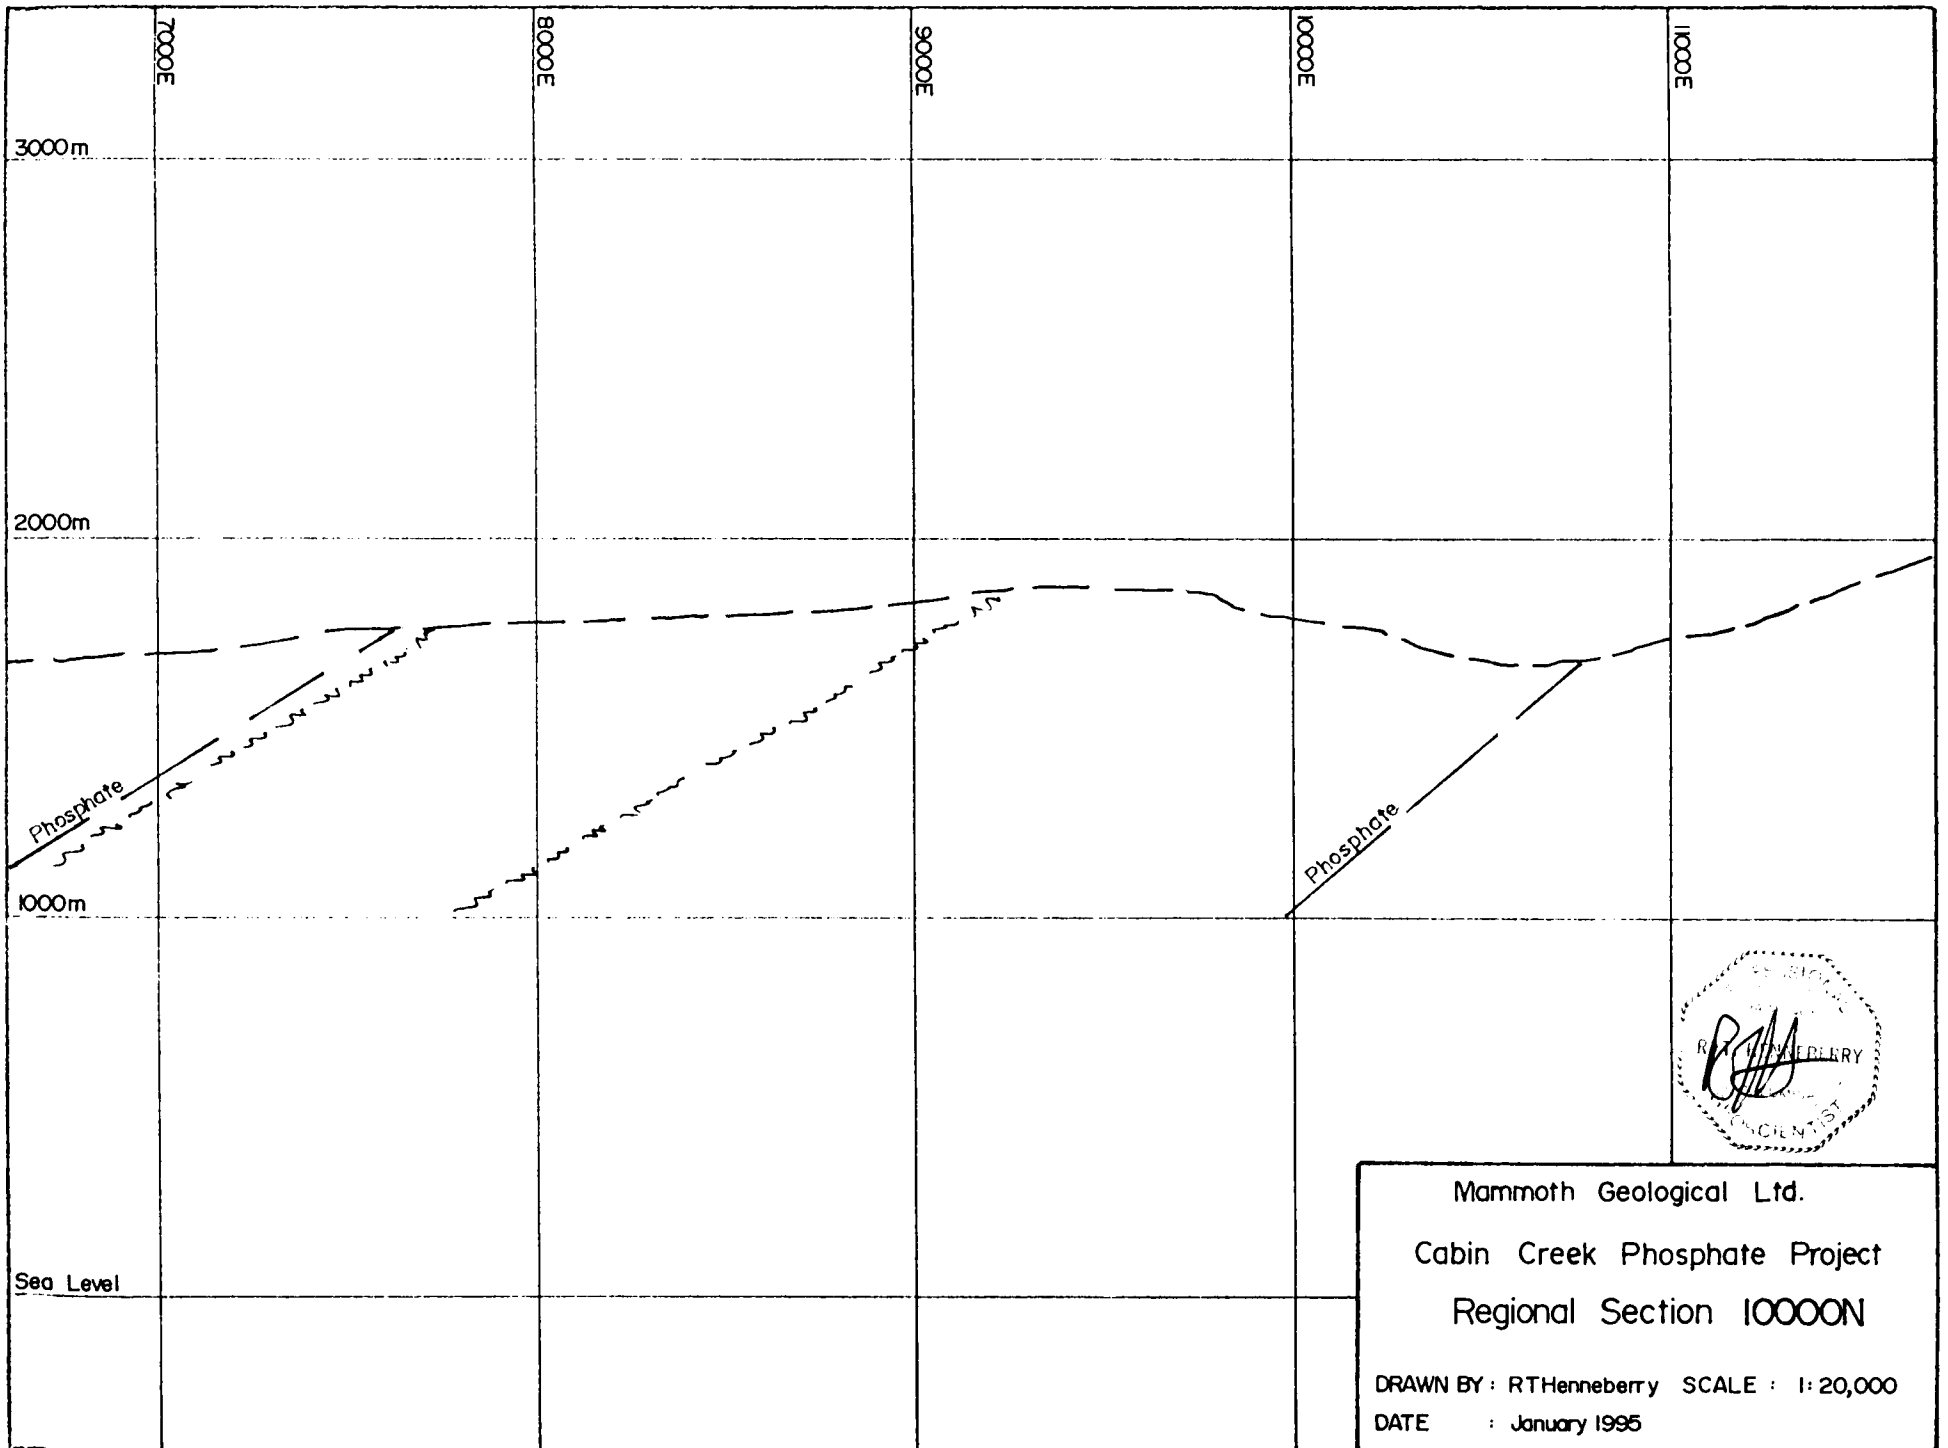



Mammoth Geological Ltd.

Cabin Creek Phosphate Project


Regional Section 10000N

DRAWN BY: RTHenneberry SCALE: 1:20,000



DATE: January 1995

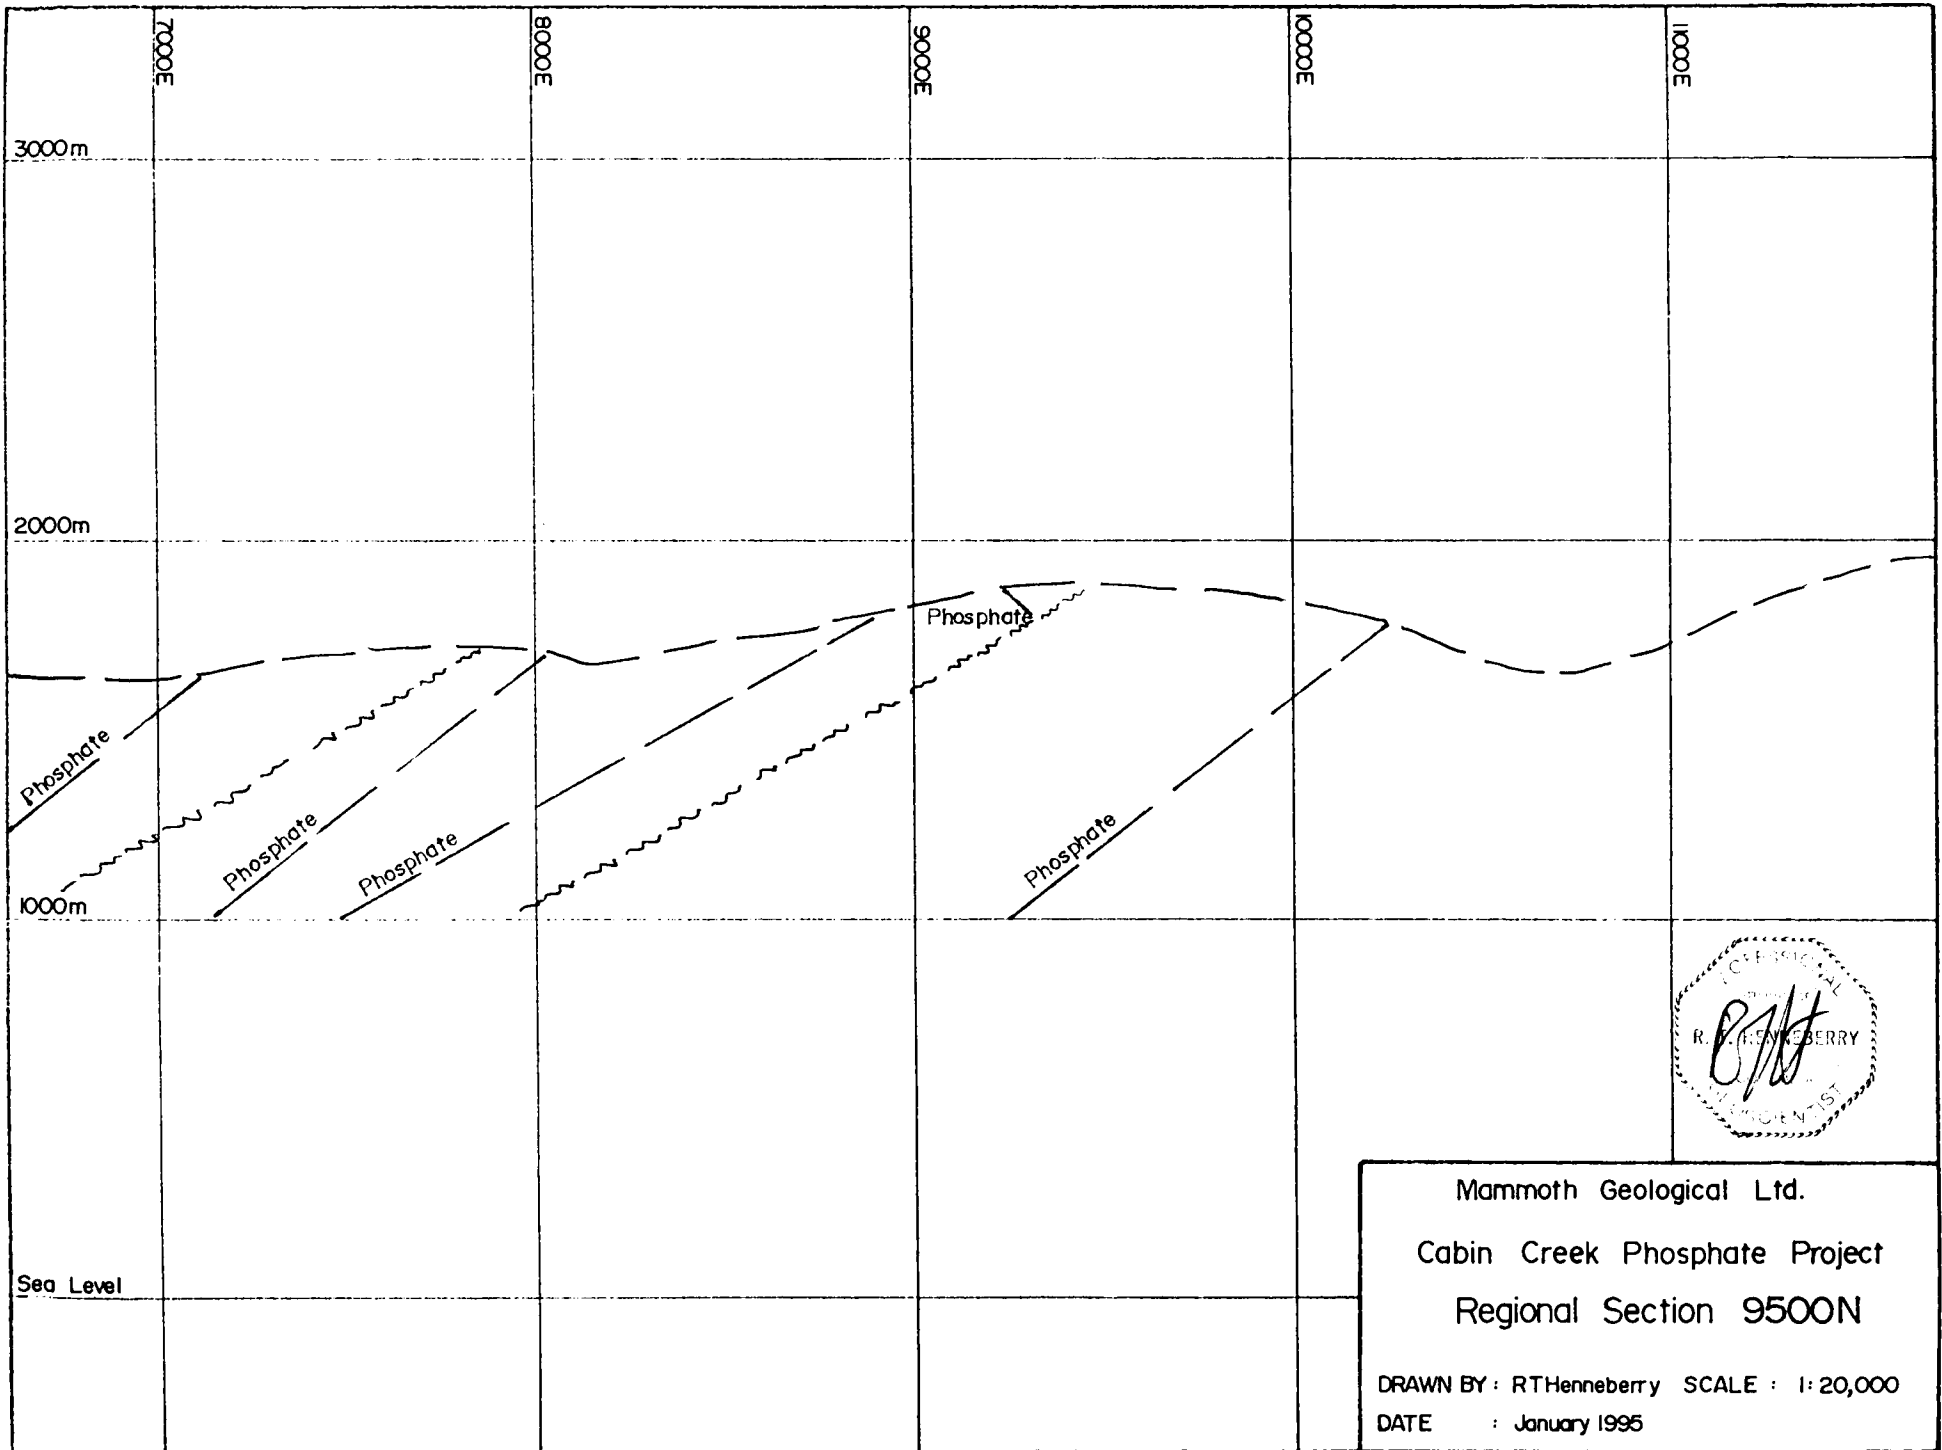


Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 9500N
 DRAWN BY : RTHenneberry SCALE : 1:20,000
 DATE : January 1995

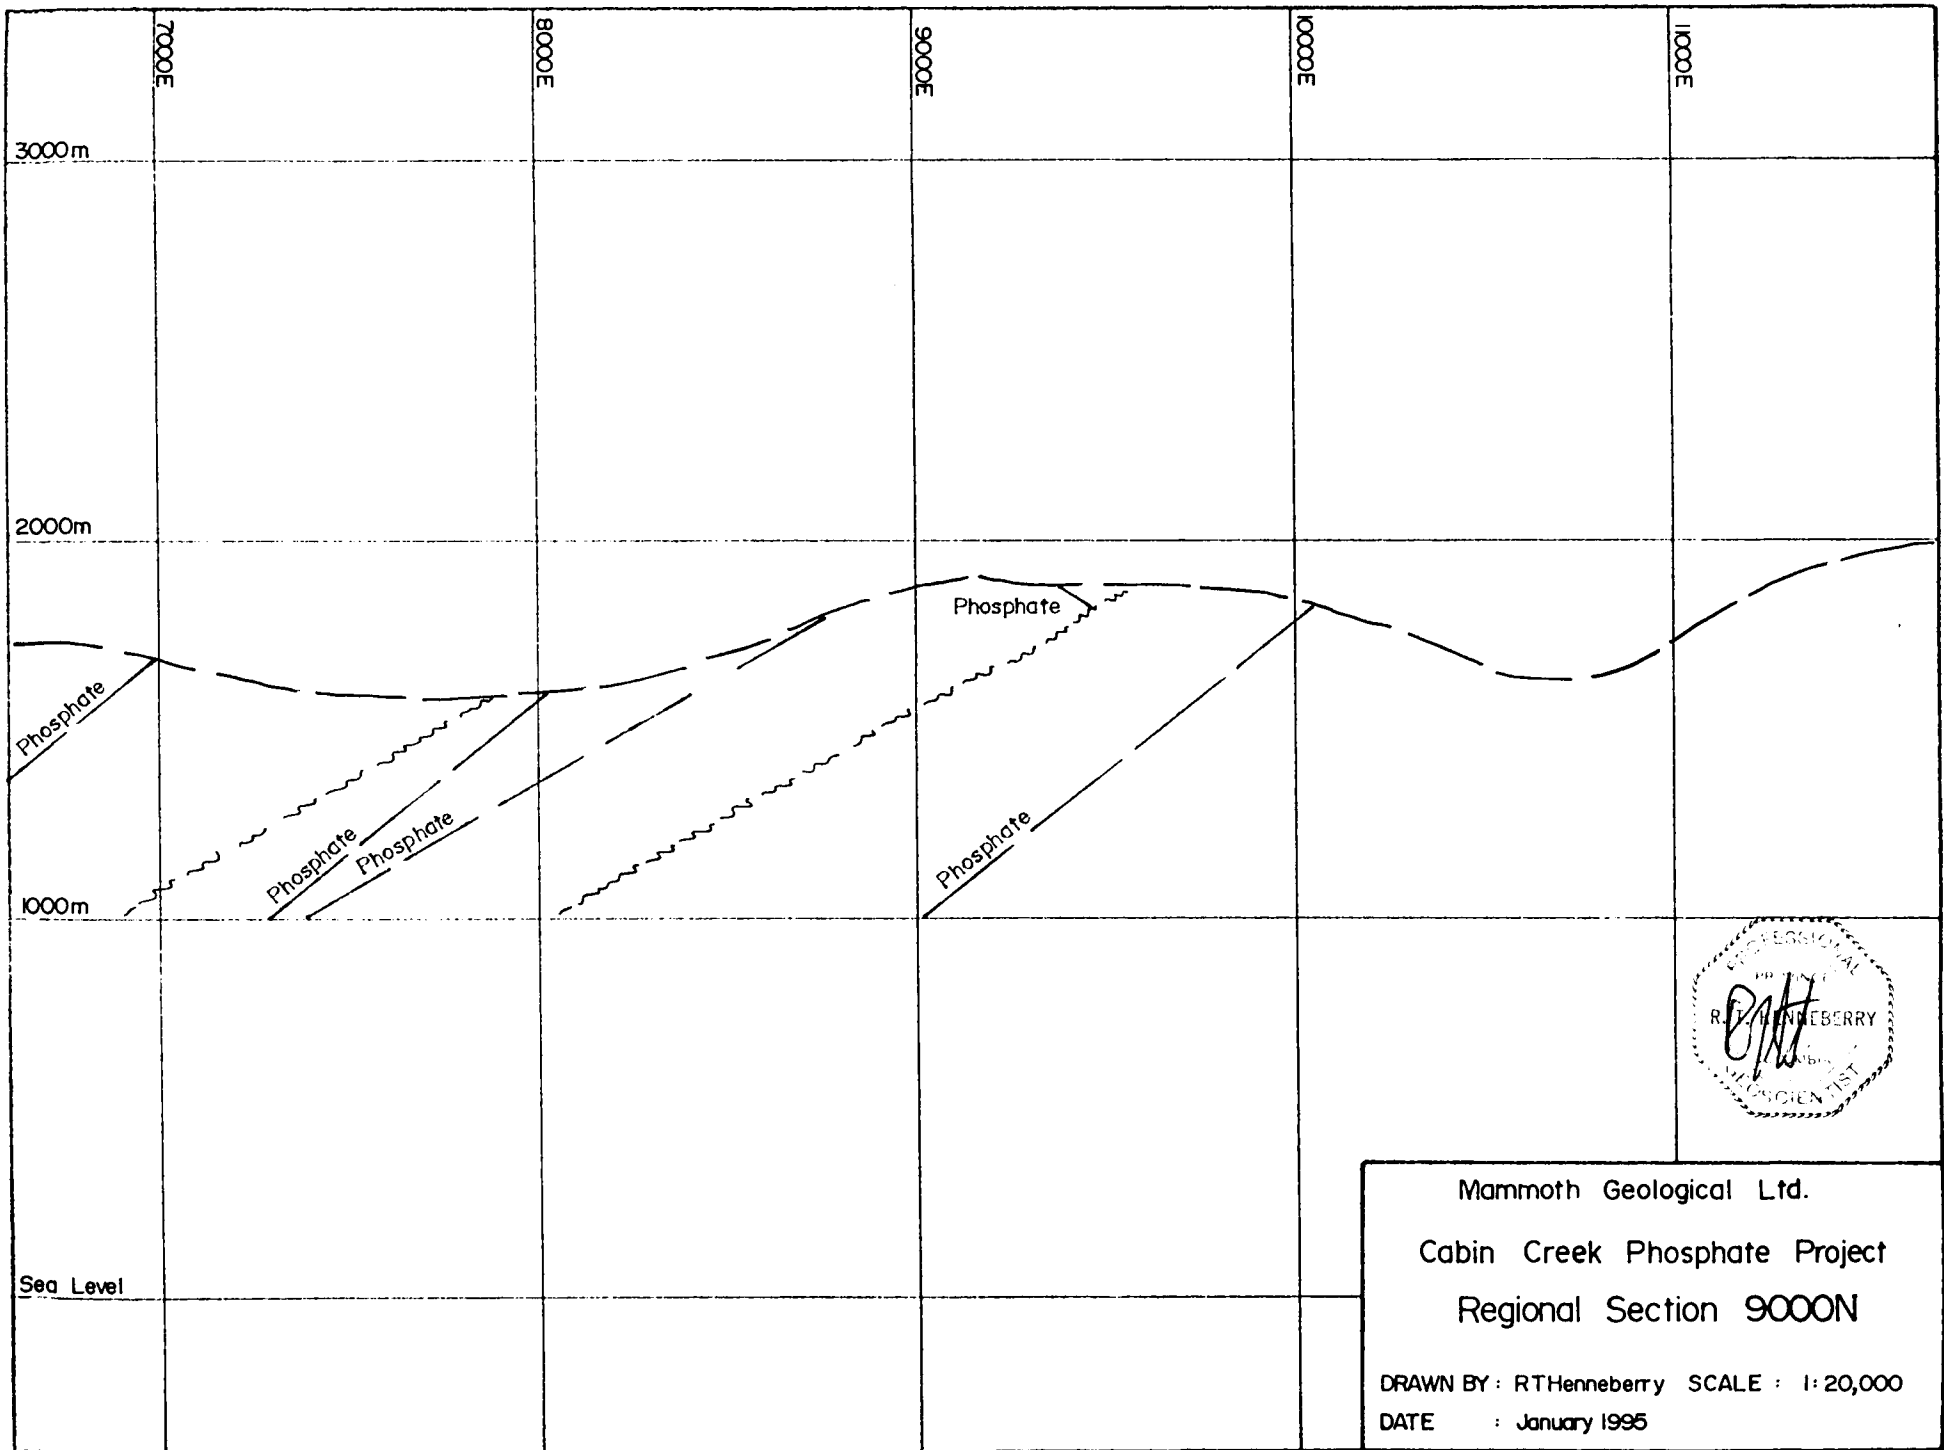


Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 9000N
 DRAWN BY: RTHenneberry SCALE: 1:20,000
 DATE: January 1995

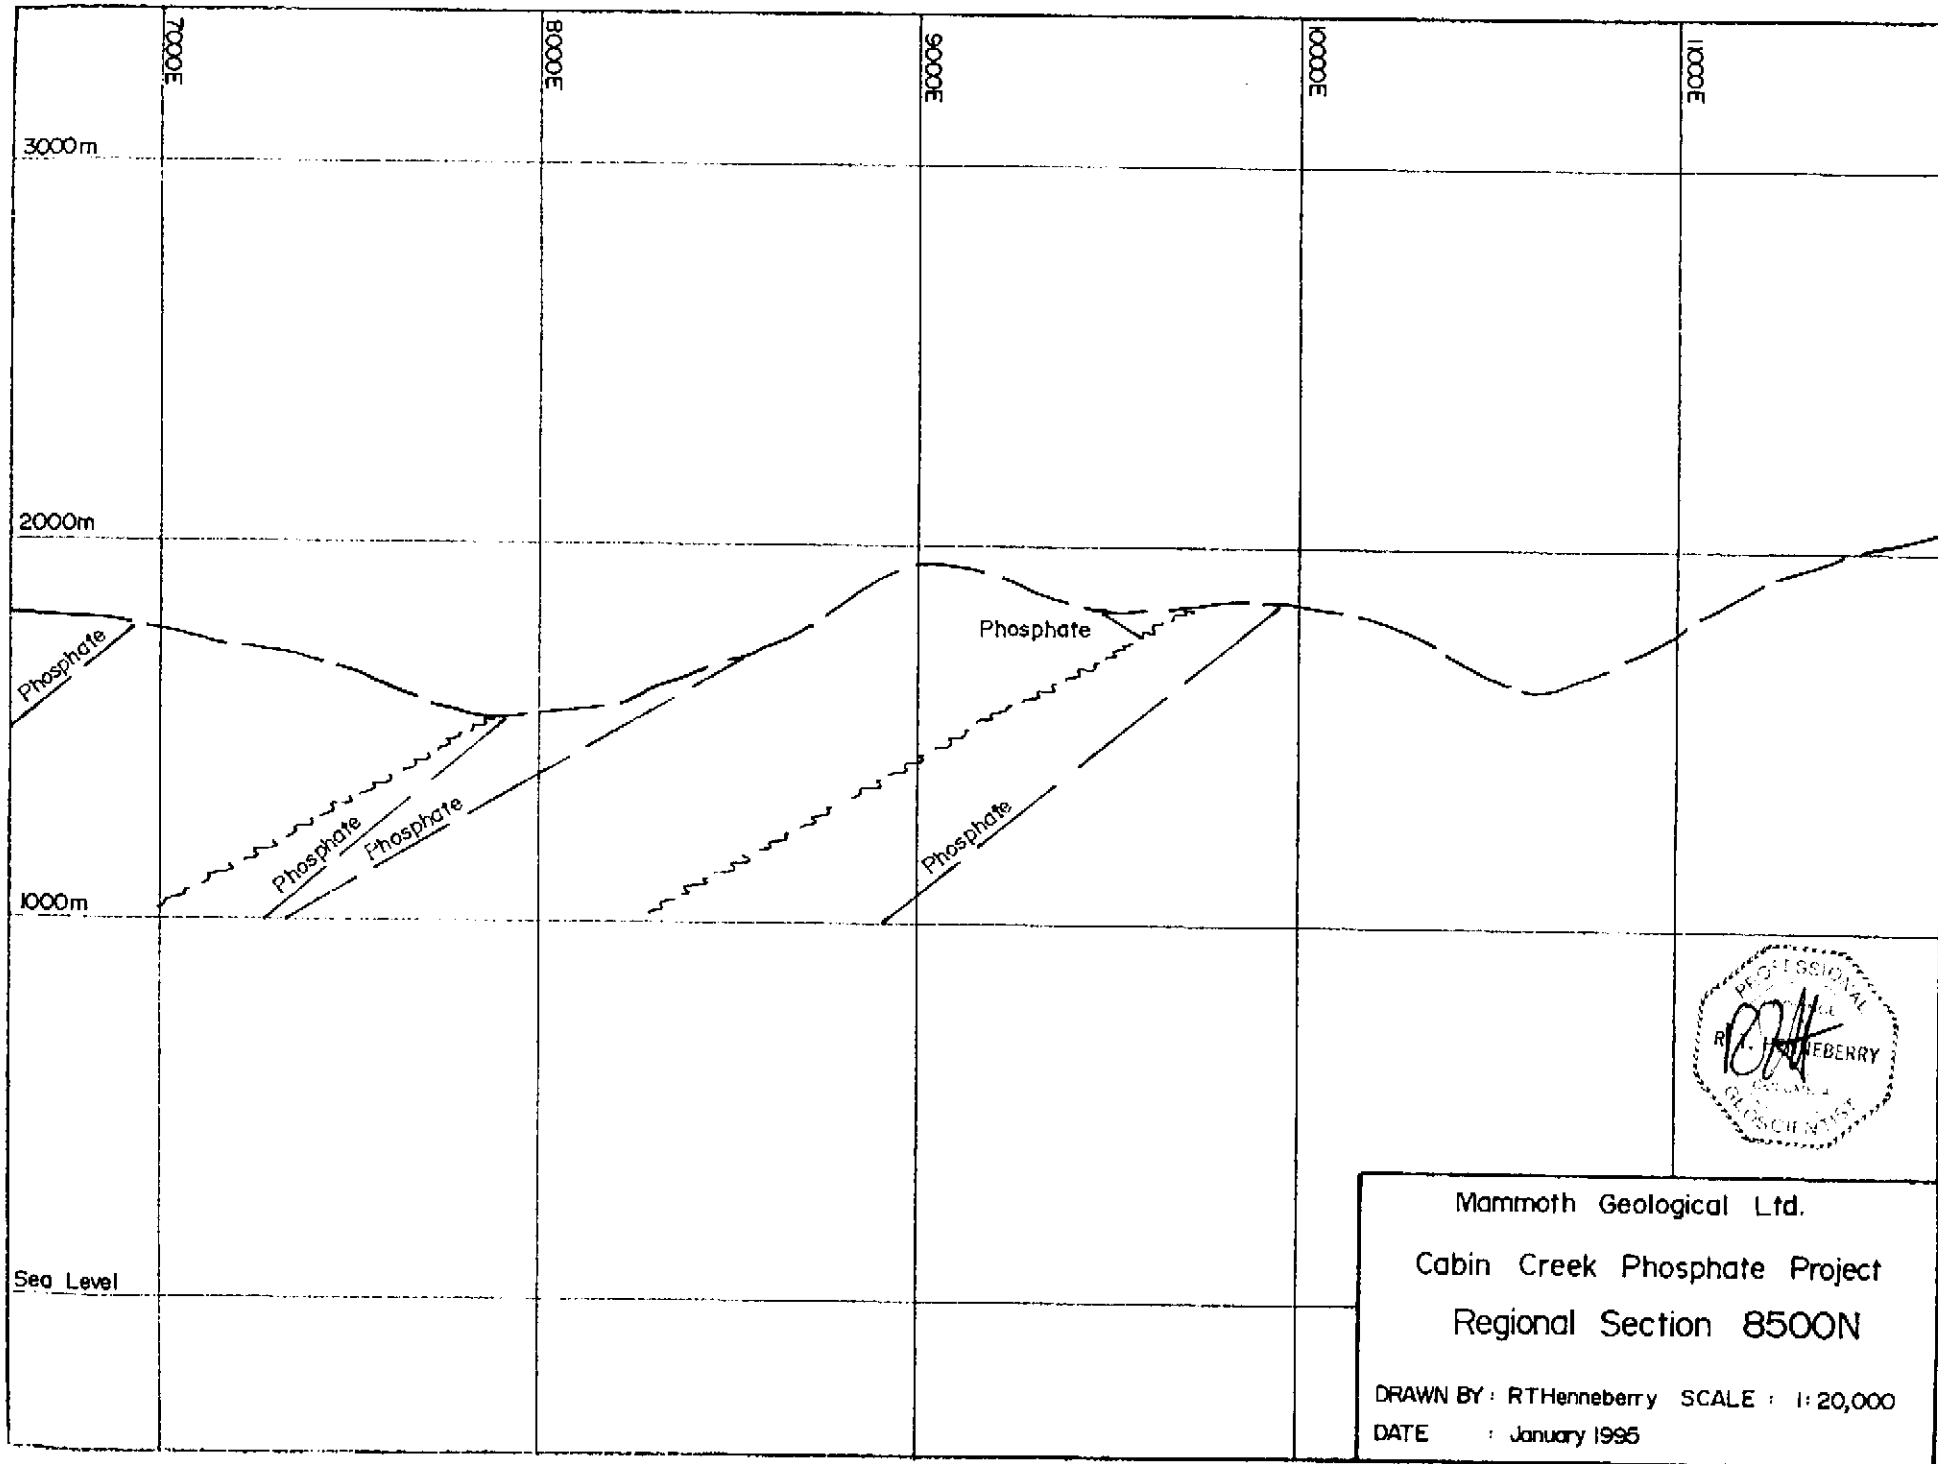


Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 8500N
 DRAWN BY: RTHenneberry SCALE: 1:20,000
 DATE: January 1995

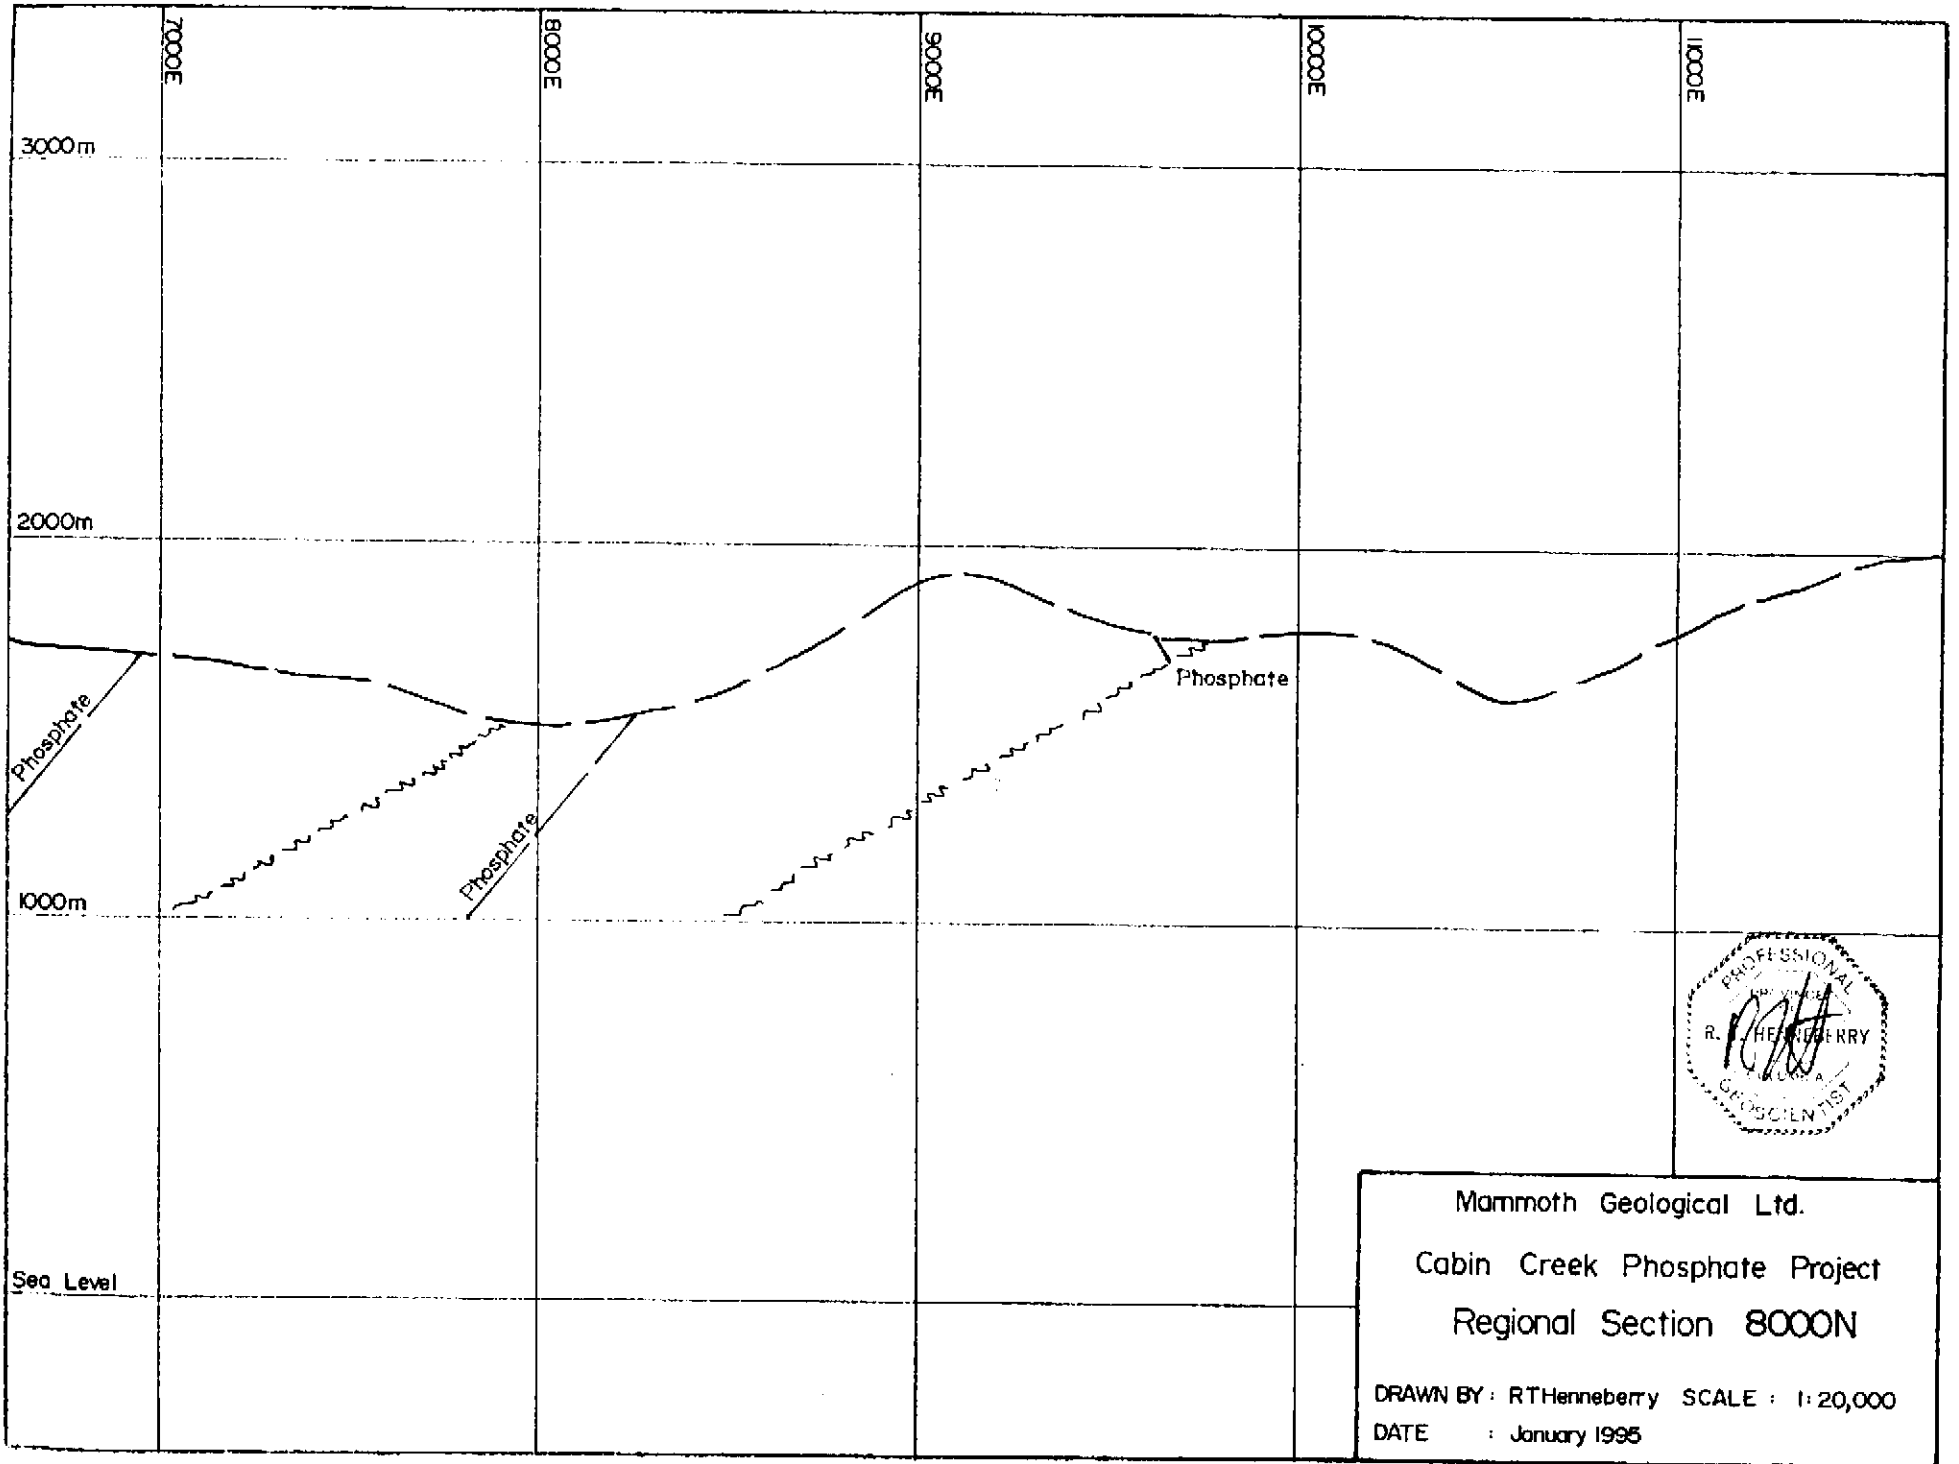

Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 8000N
 DRAWN BY: RTHenneberry SCALE: 1:20,000
 DATE: January 1995

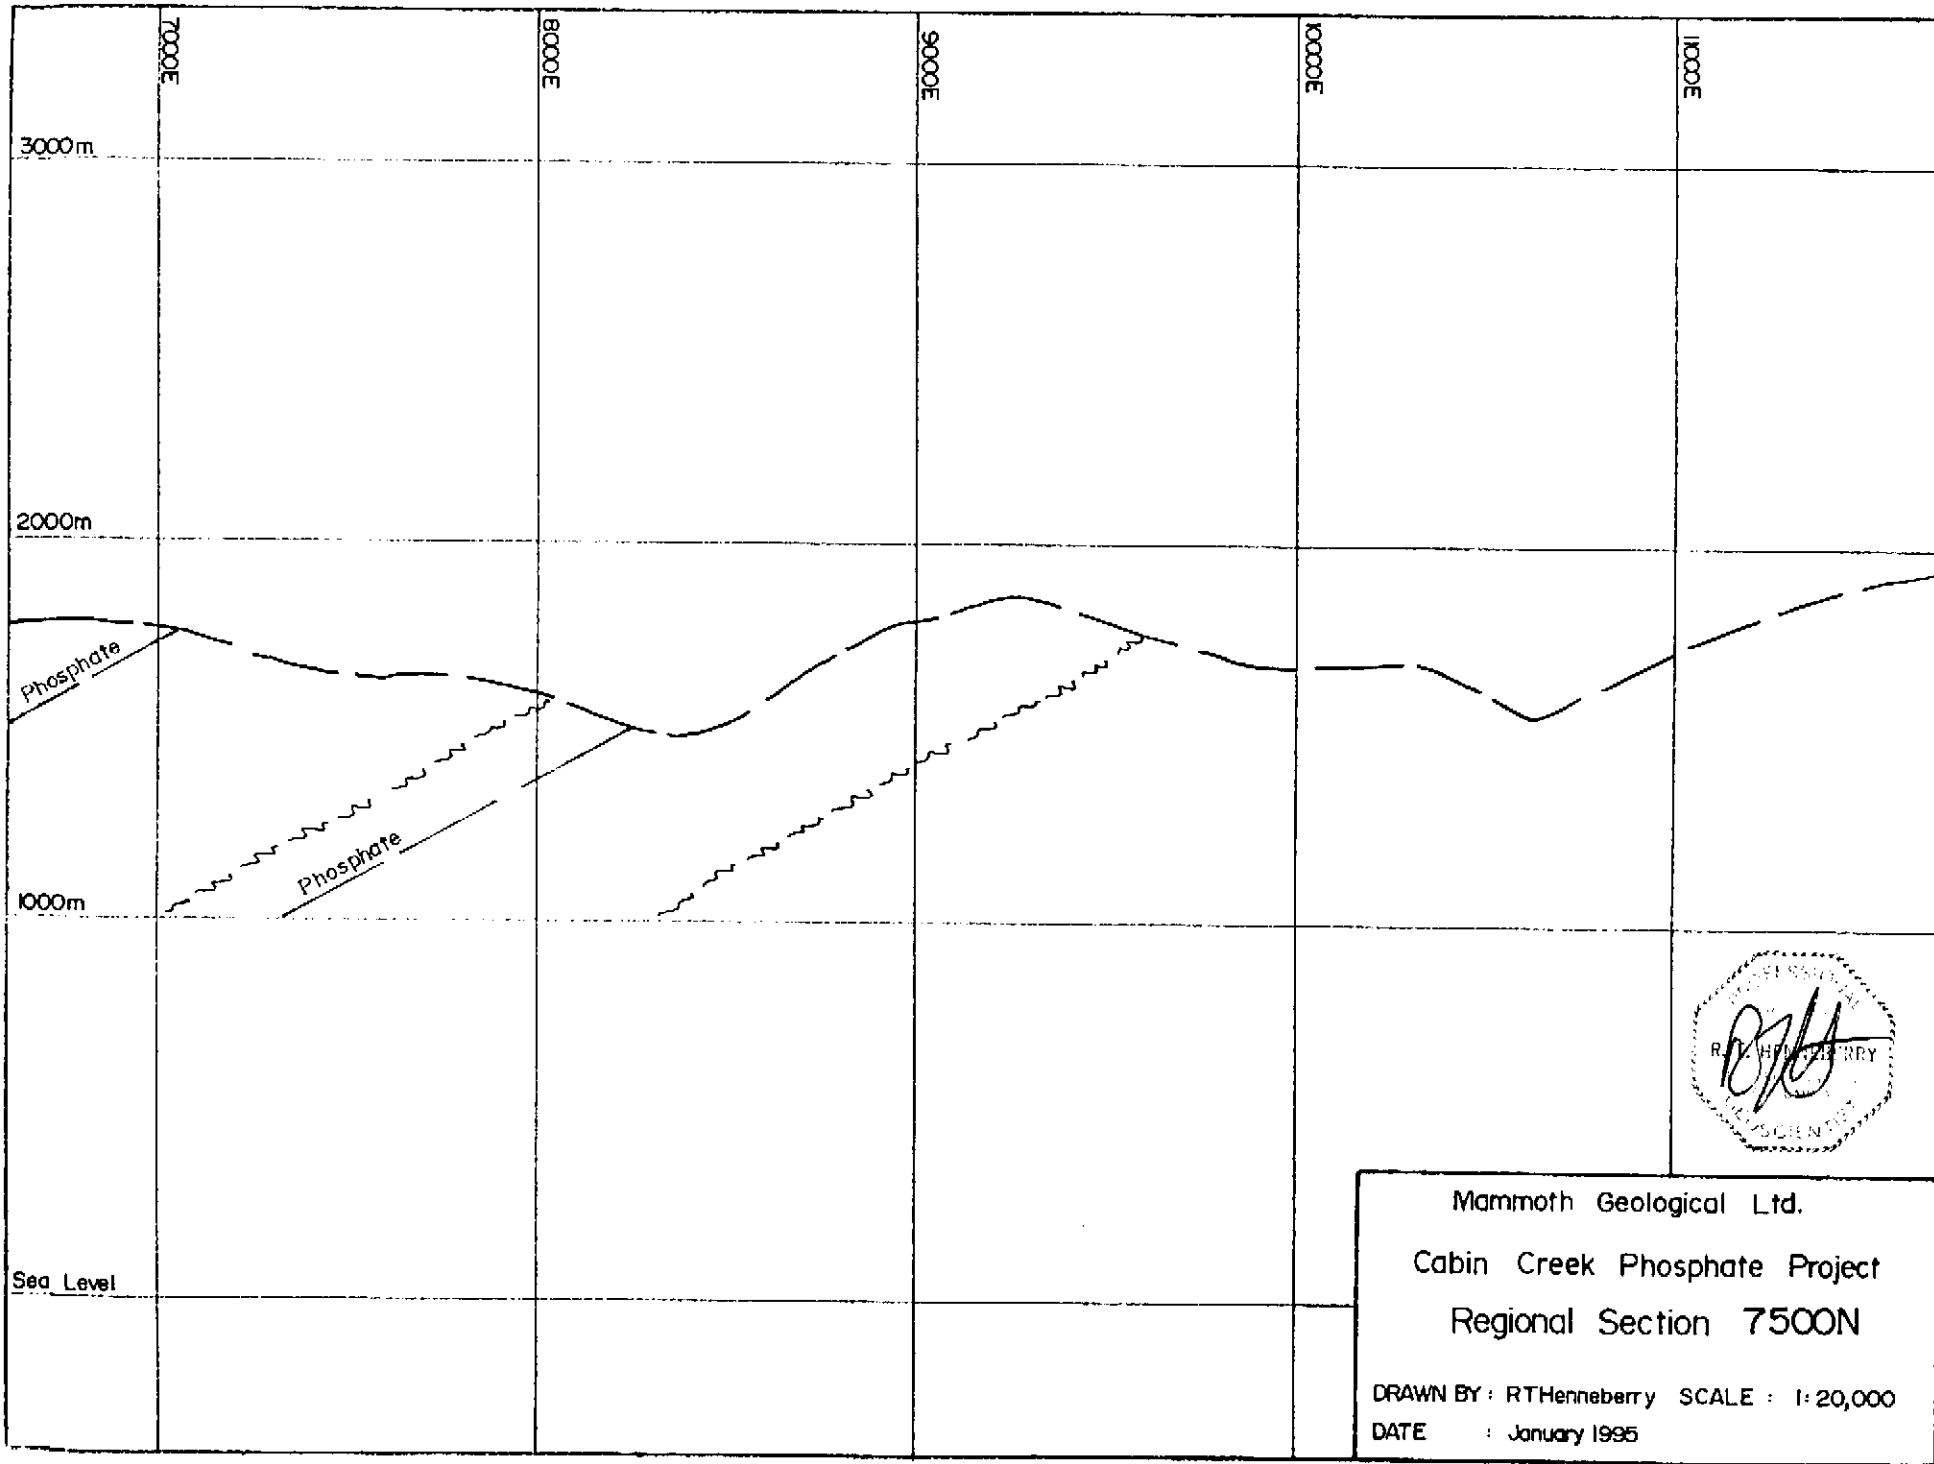


Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 7500N
 DRAWN BY: RTHenneberry SCALE: 1:20,000
 DATE: January 1995


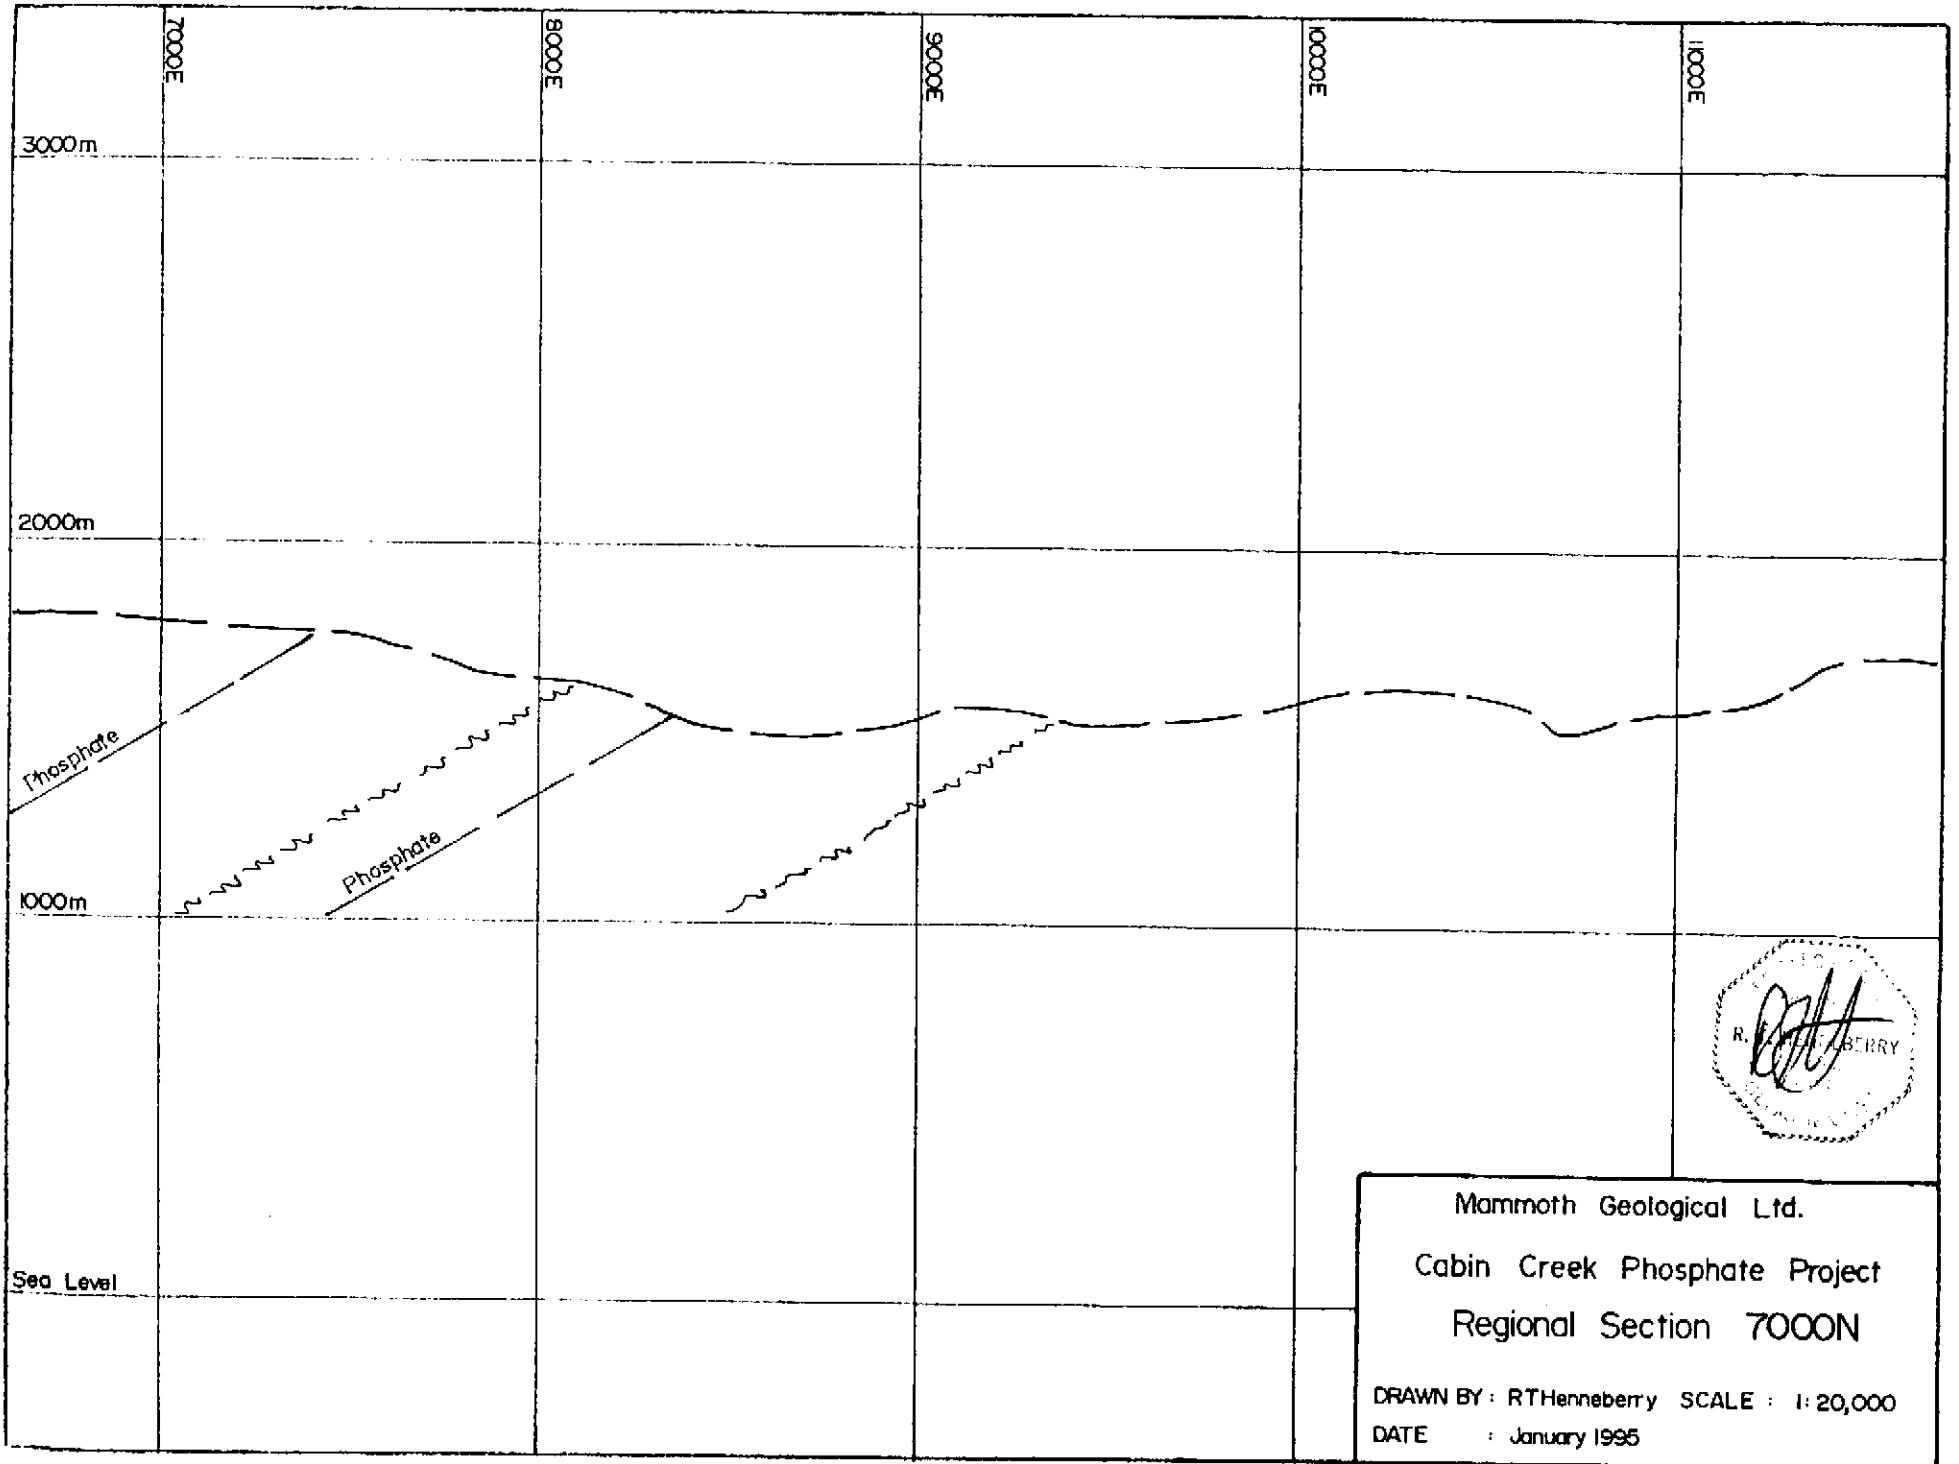


Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 7000N


DRAWN BY: RTHenneberry SCALE: 1:20,000
 DATE: January 1995

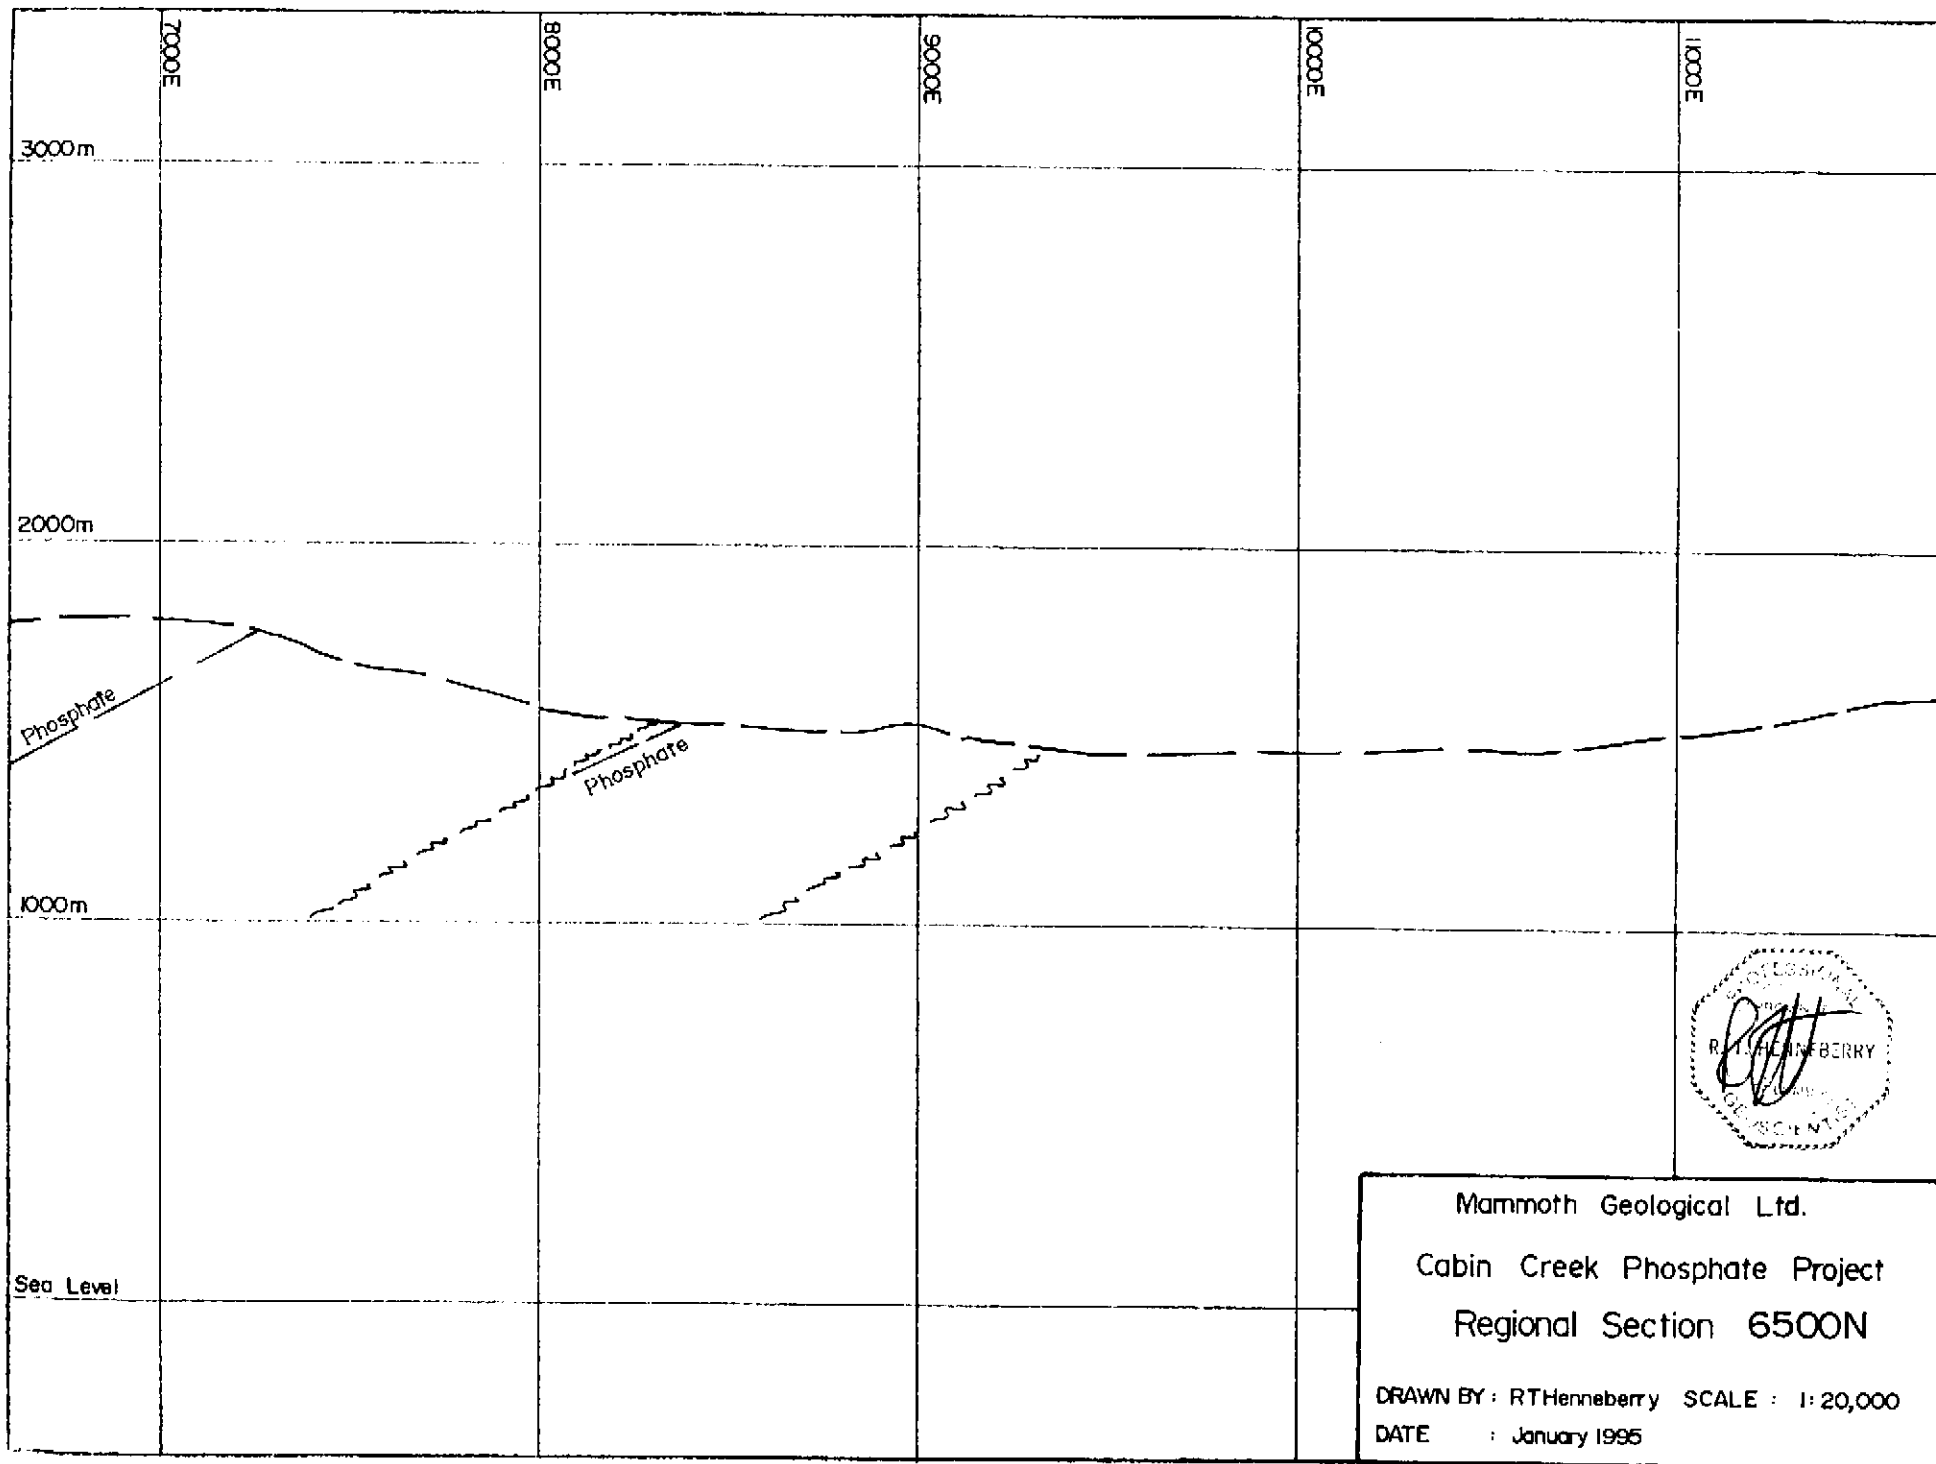


Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 6500N
 DRAWN BY: RTHenneberry SCALE: 1:20,000
 DATE: January 1995

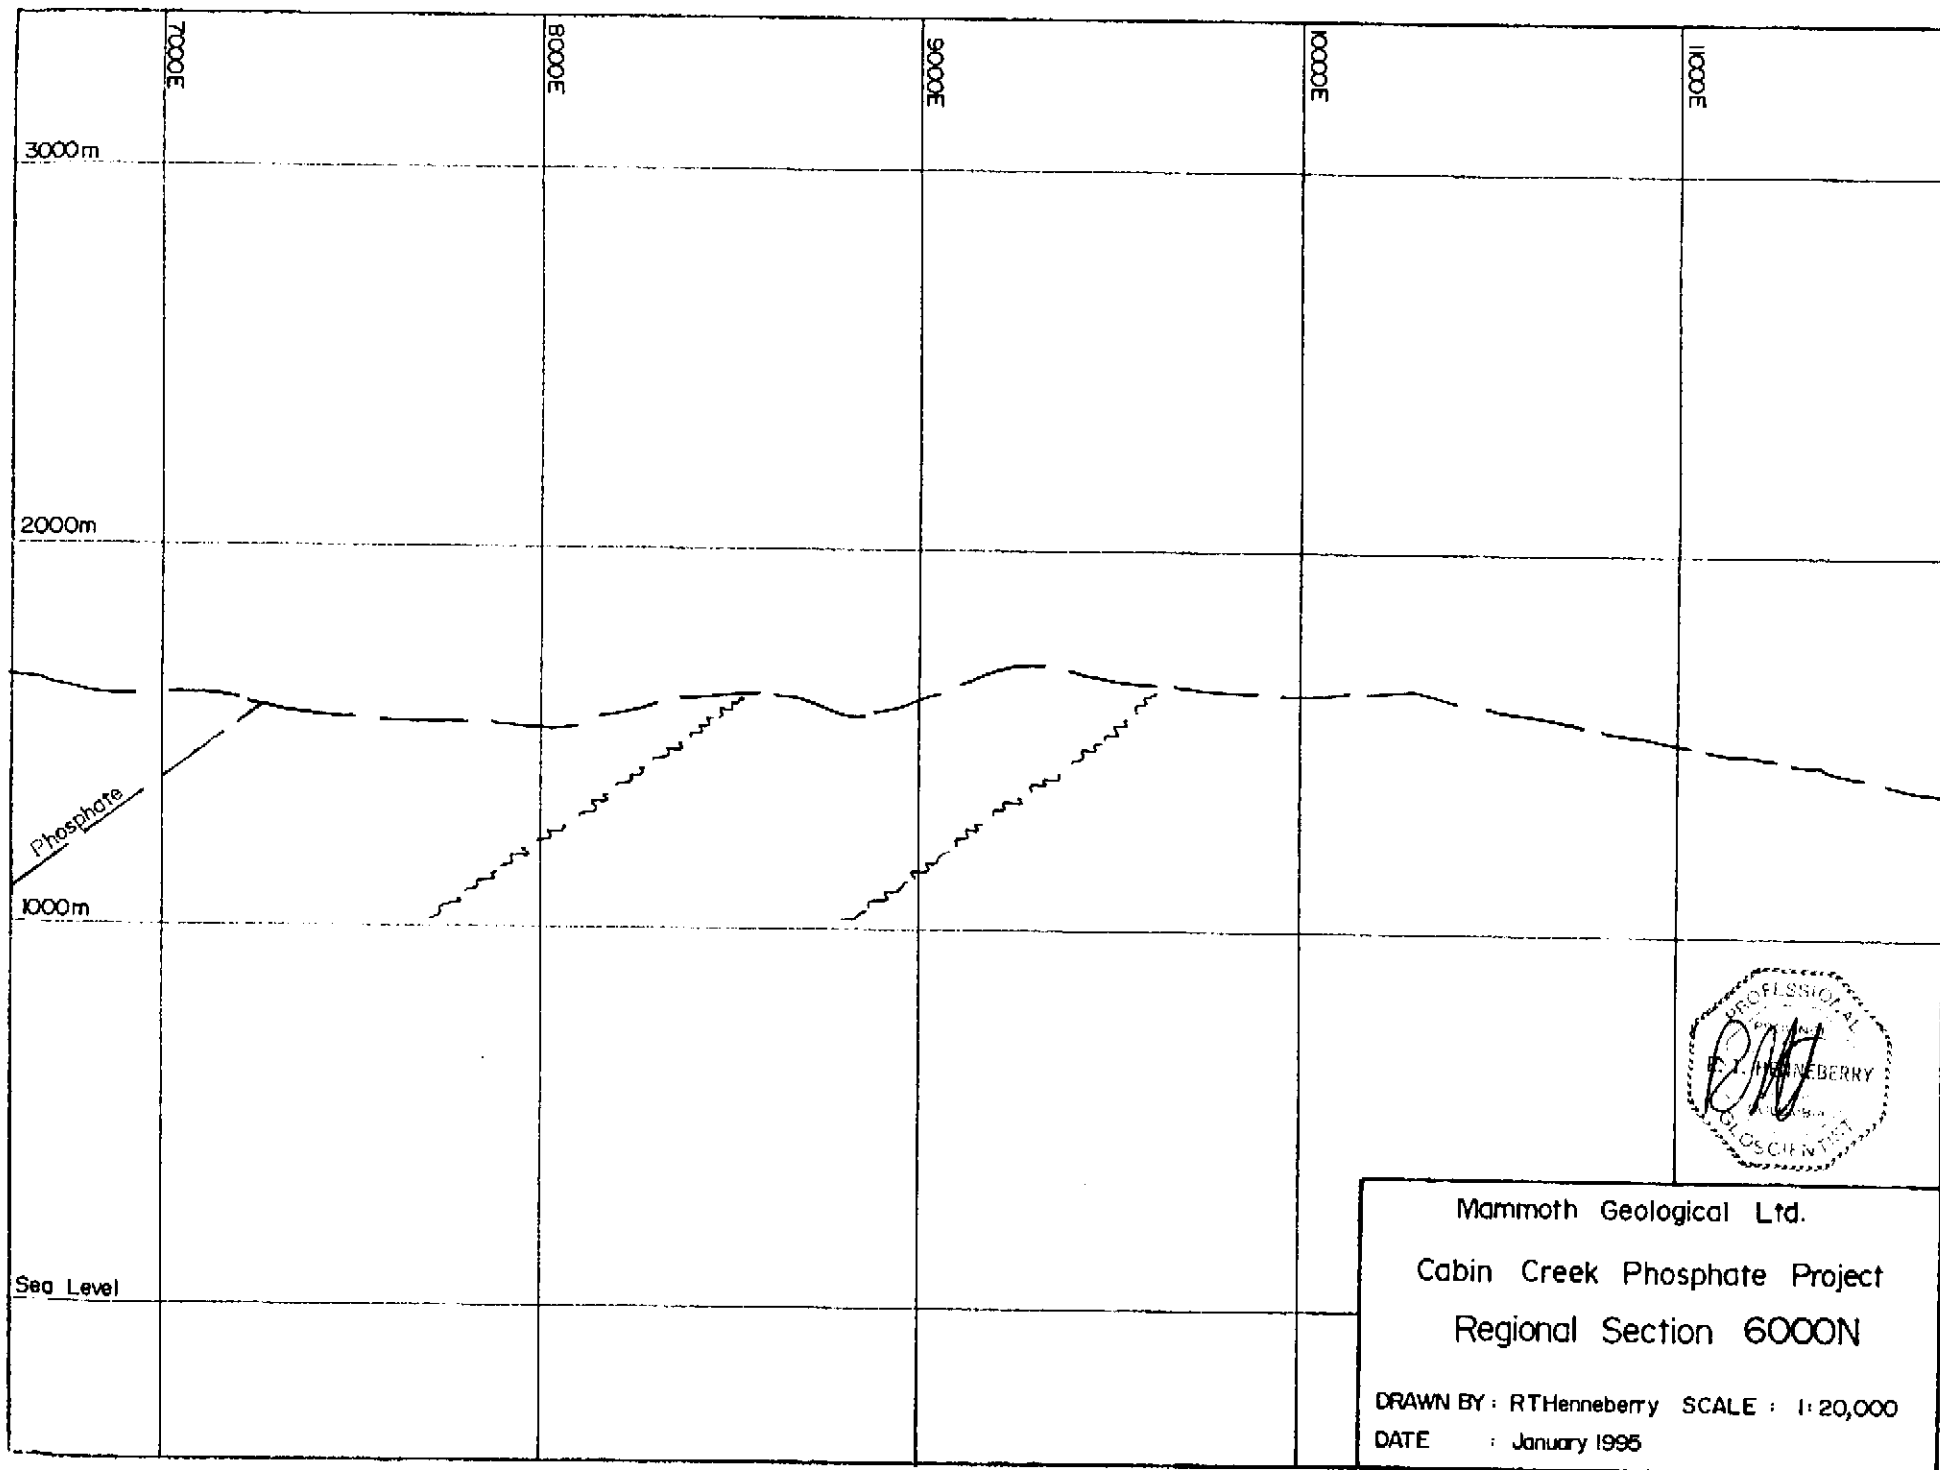



Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 6000N
 DRAWN BY: R. Henneberry SCALE: 1:20,000
 DATE: January 1995

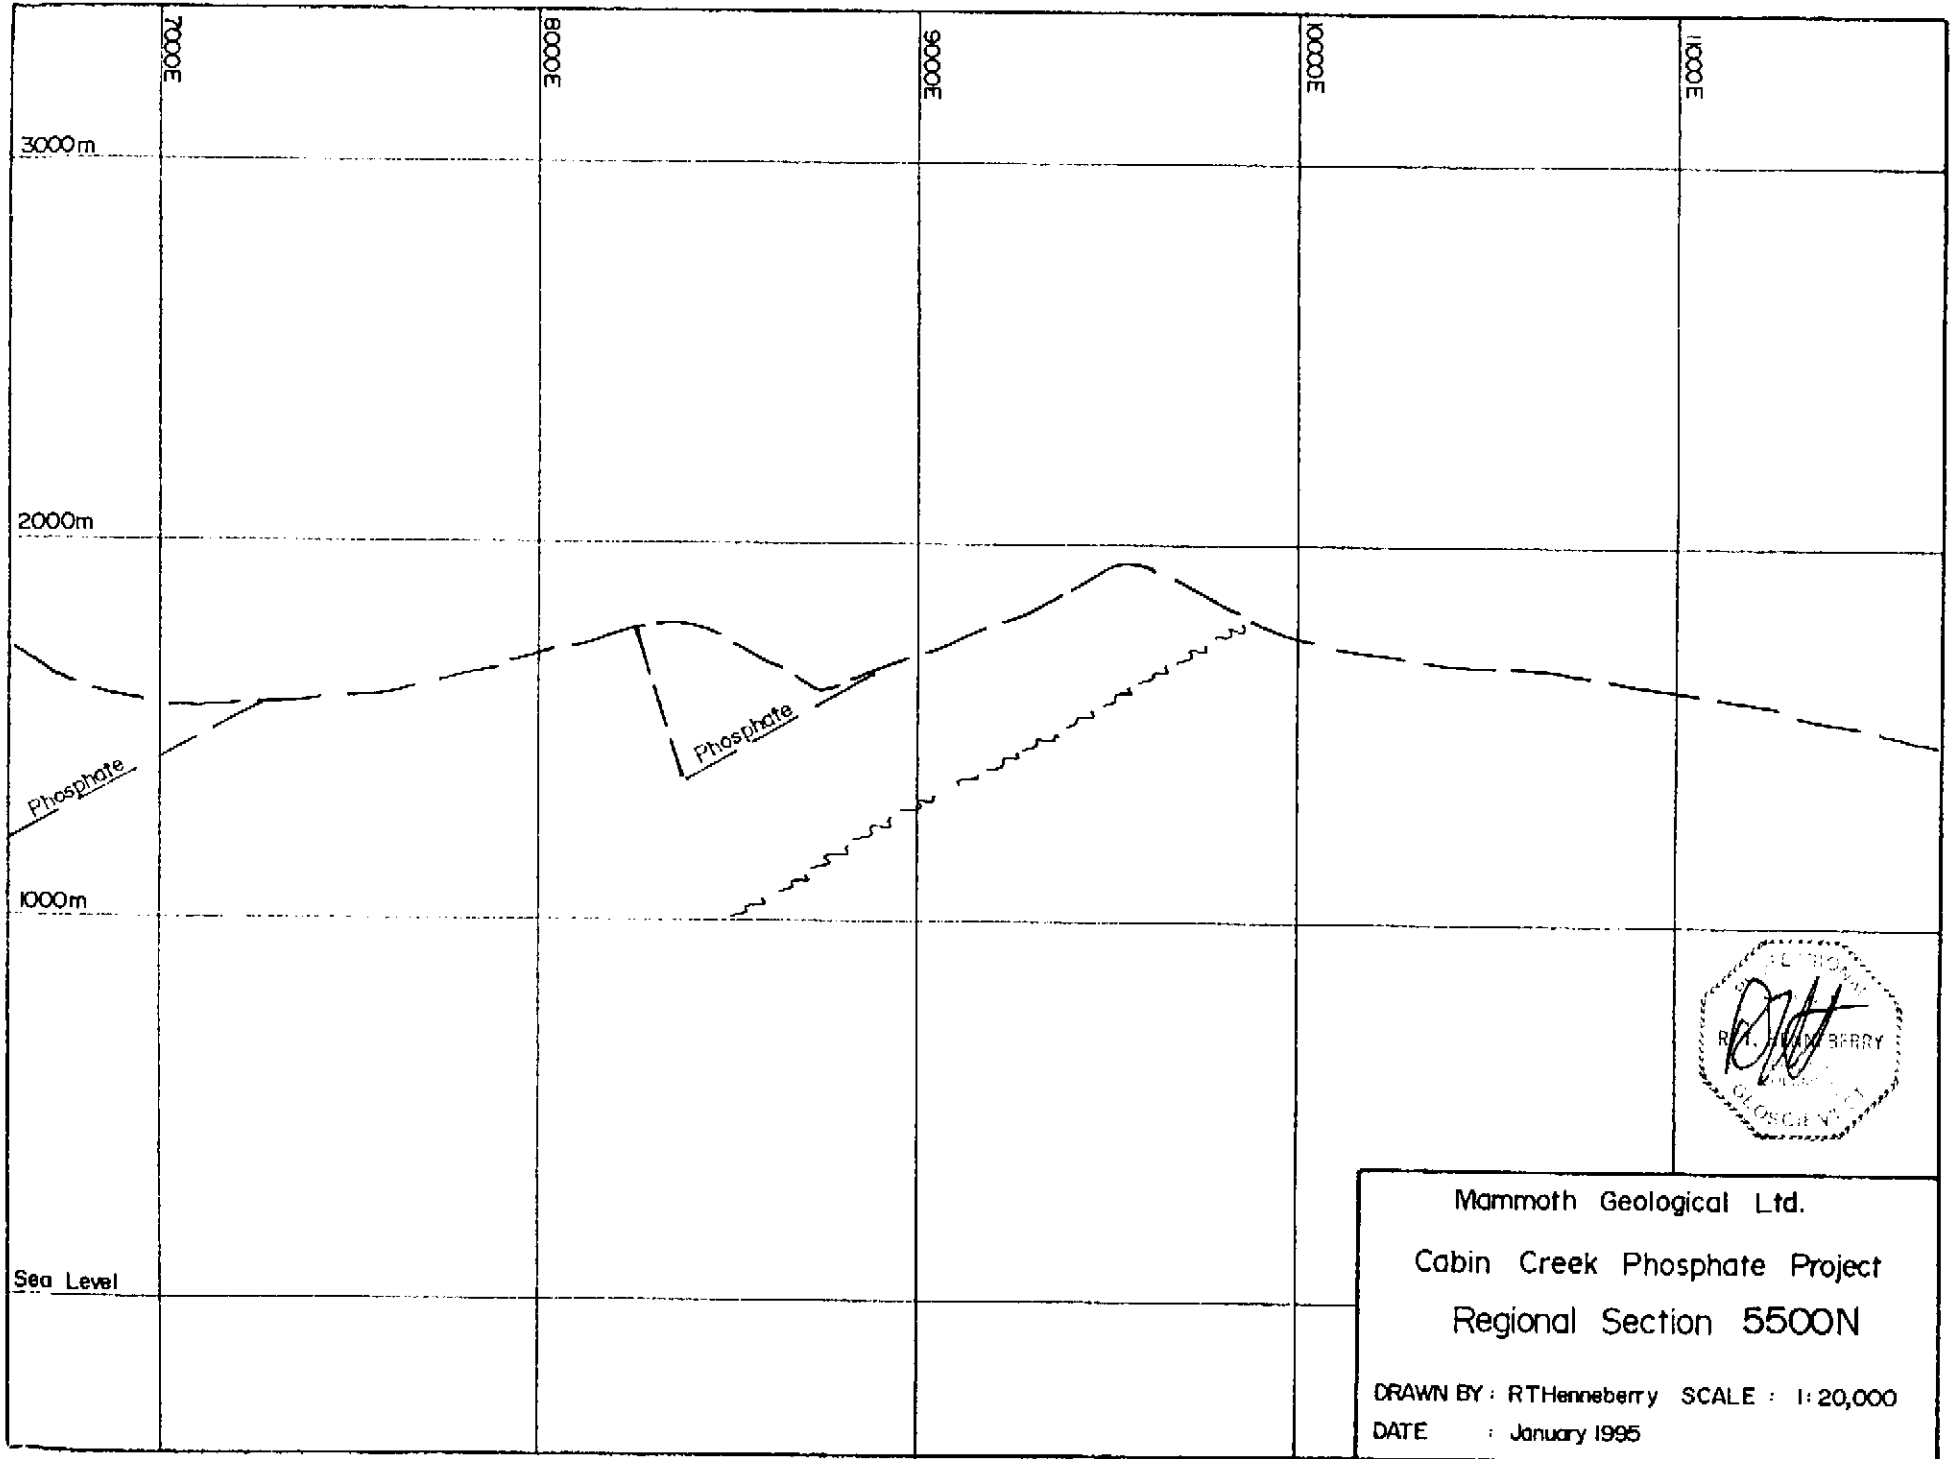



Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 5500N
 DRAWN BY: RTHenneberry SCALE: 1:20,000
 DATE: January 1995

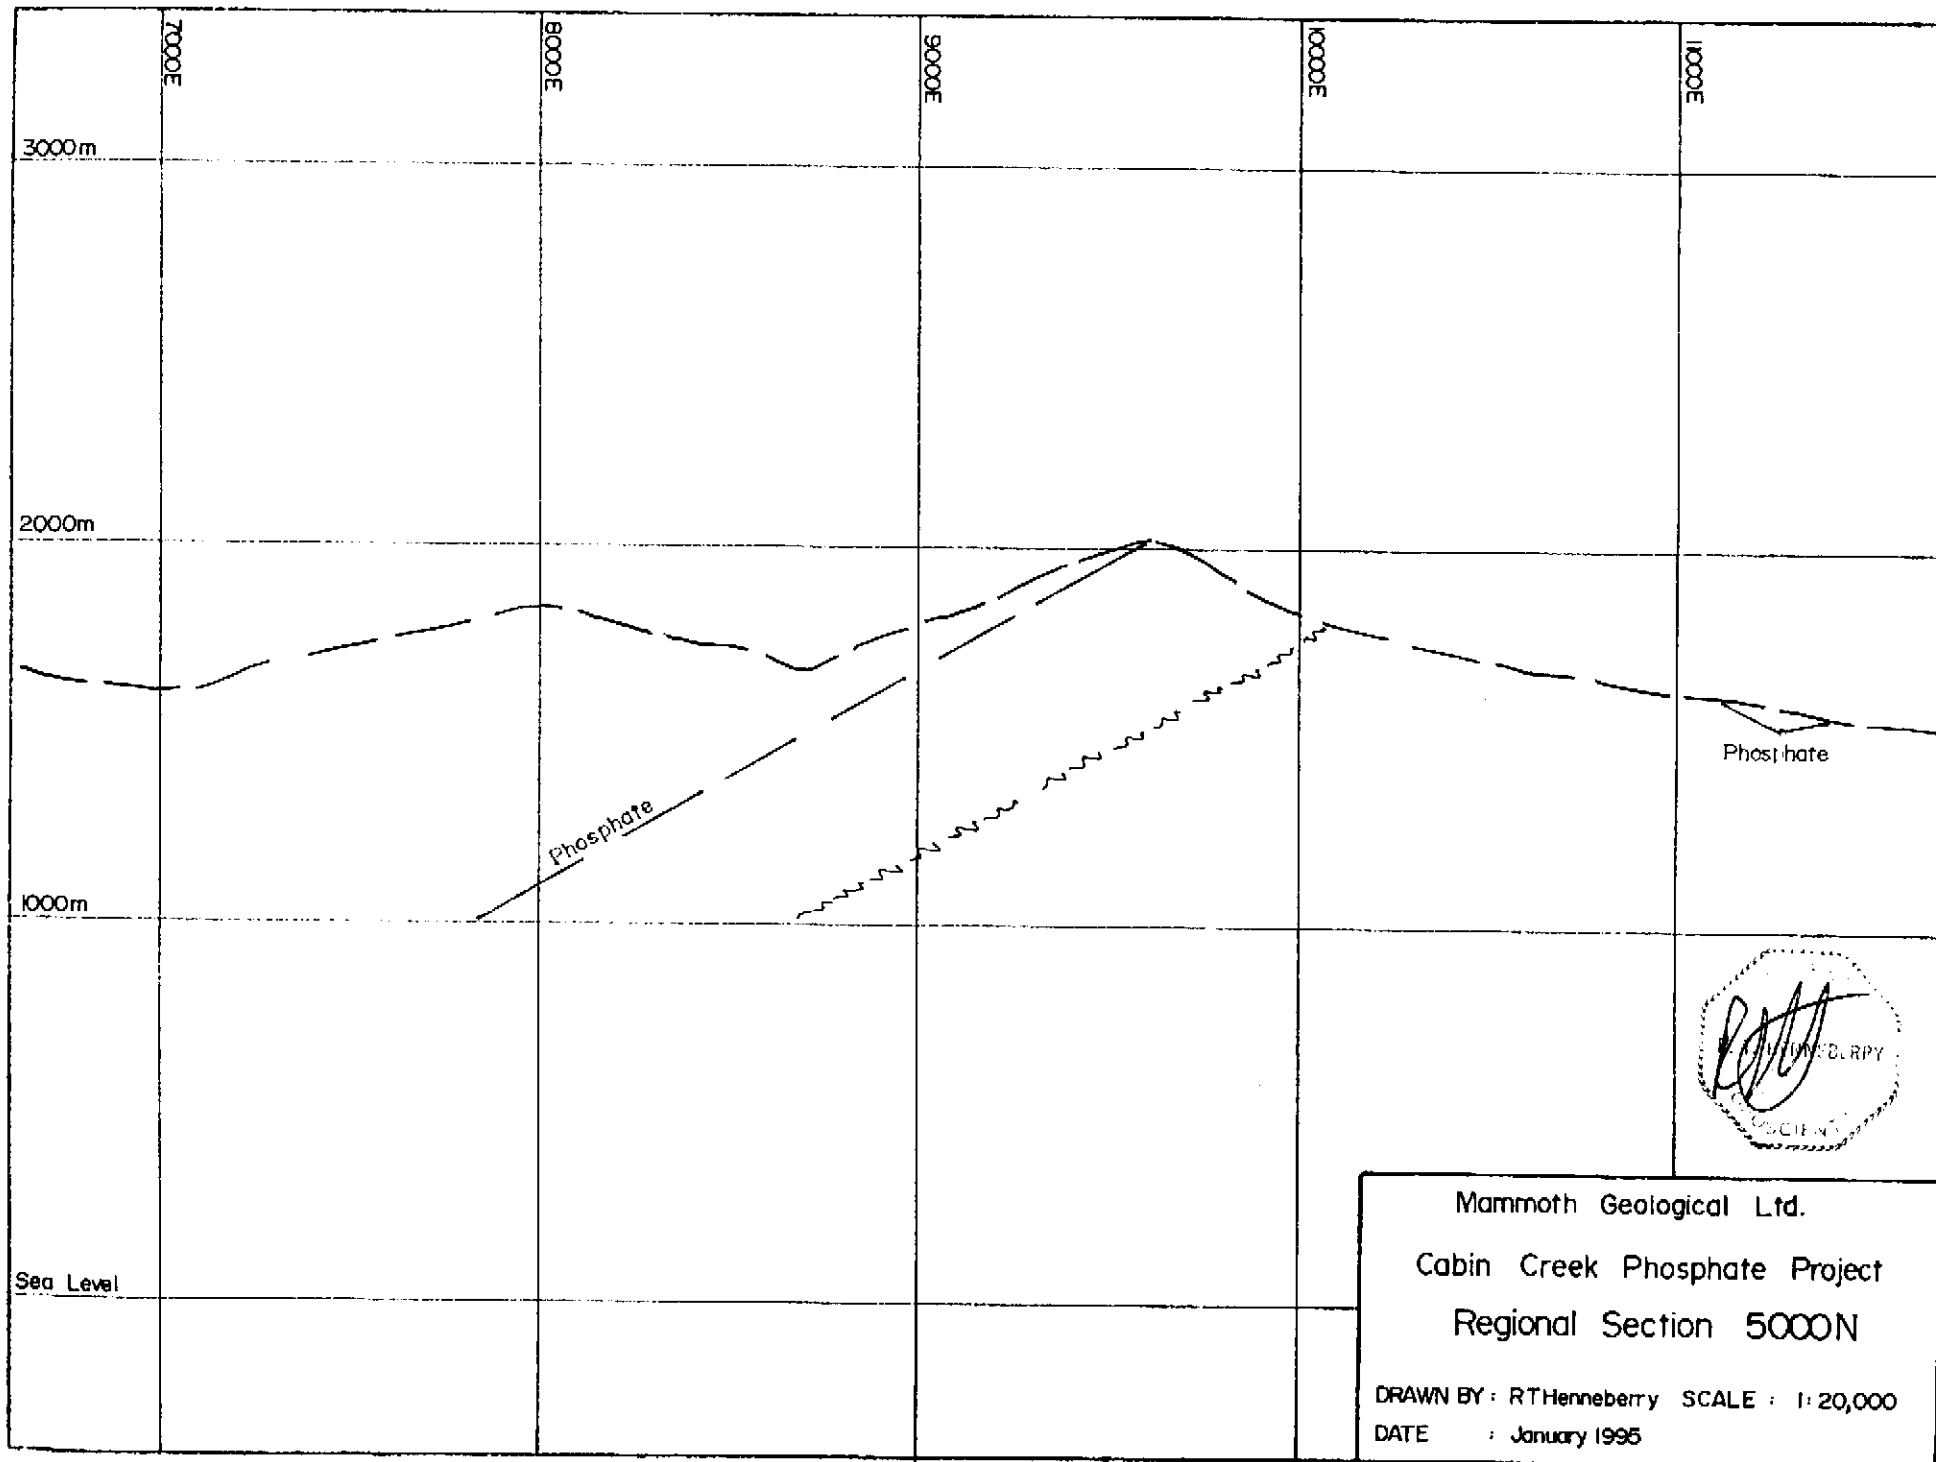

Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 5000N
 DRAWN BY: RTHenneberry SCALE: 1:20,000
 DATE: January 1995

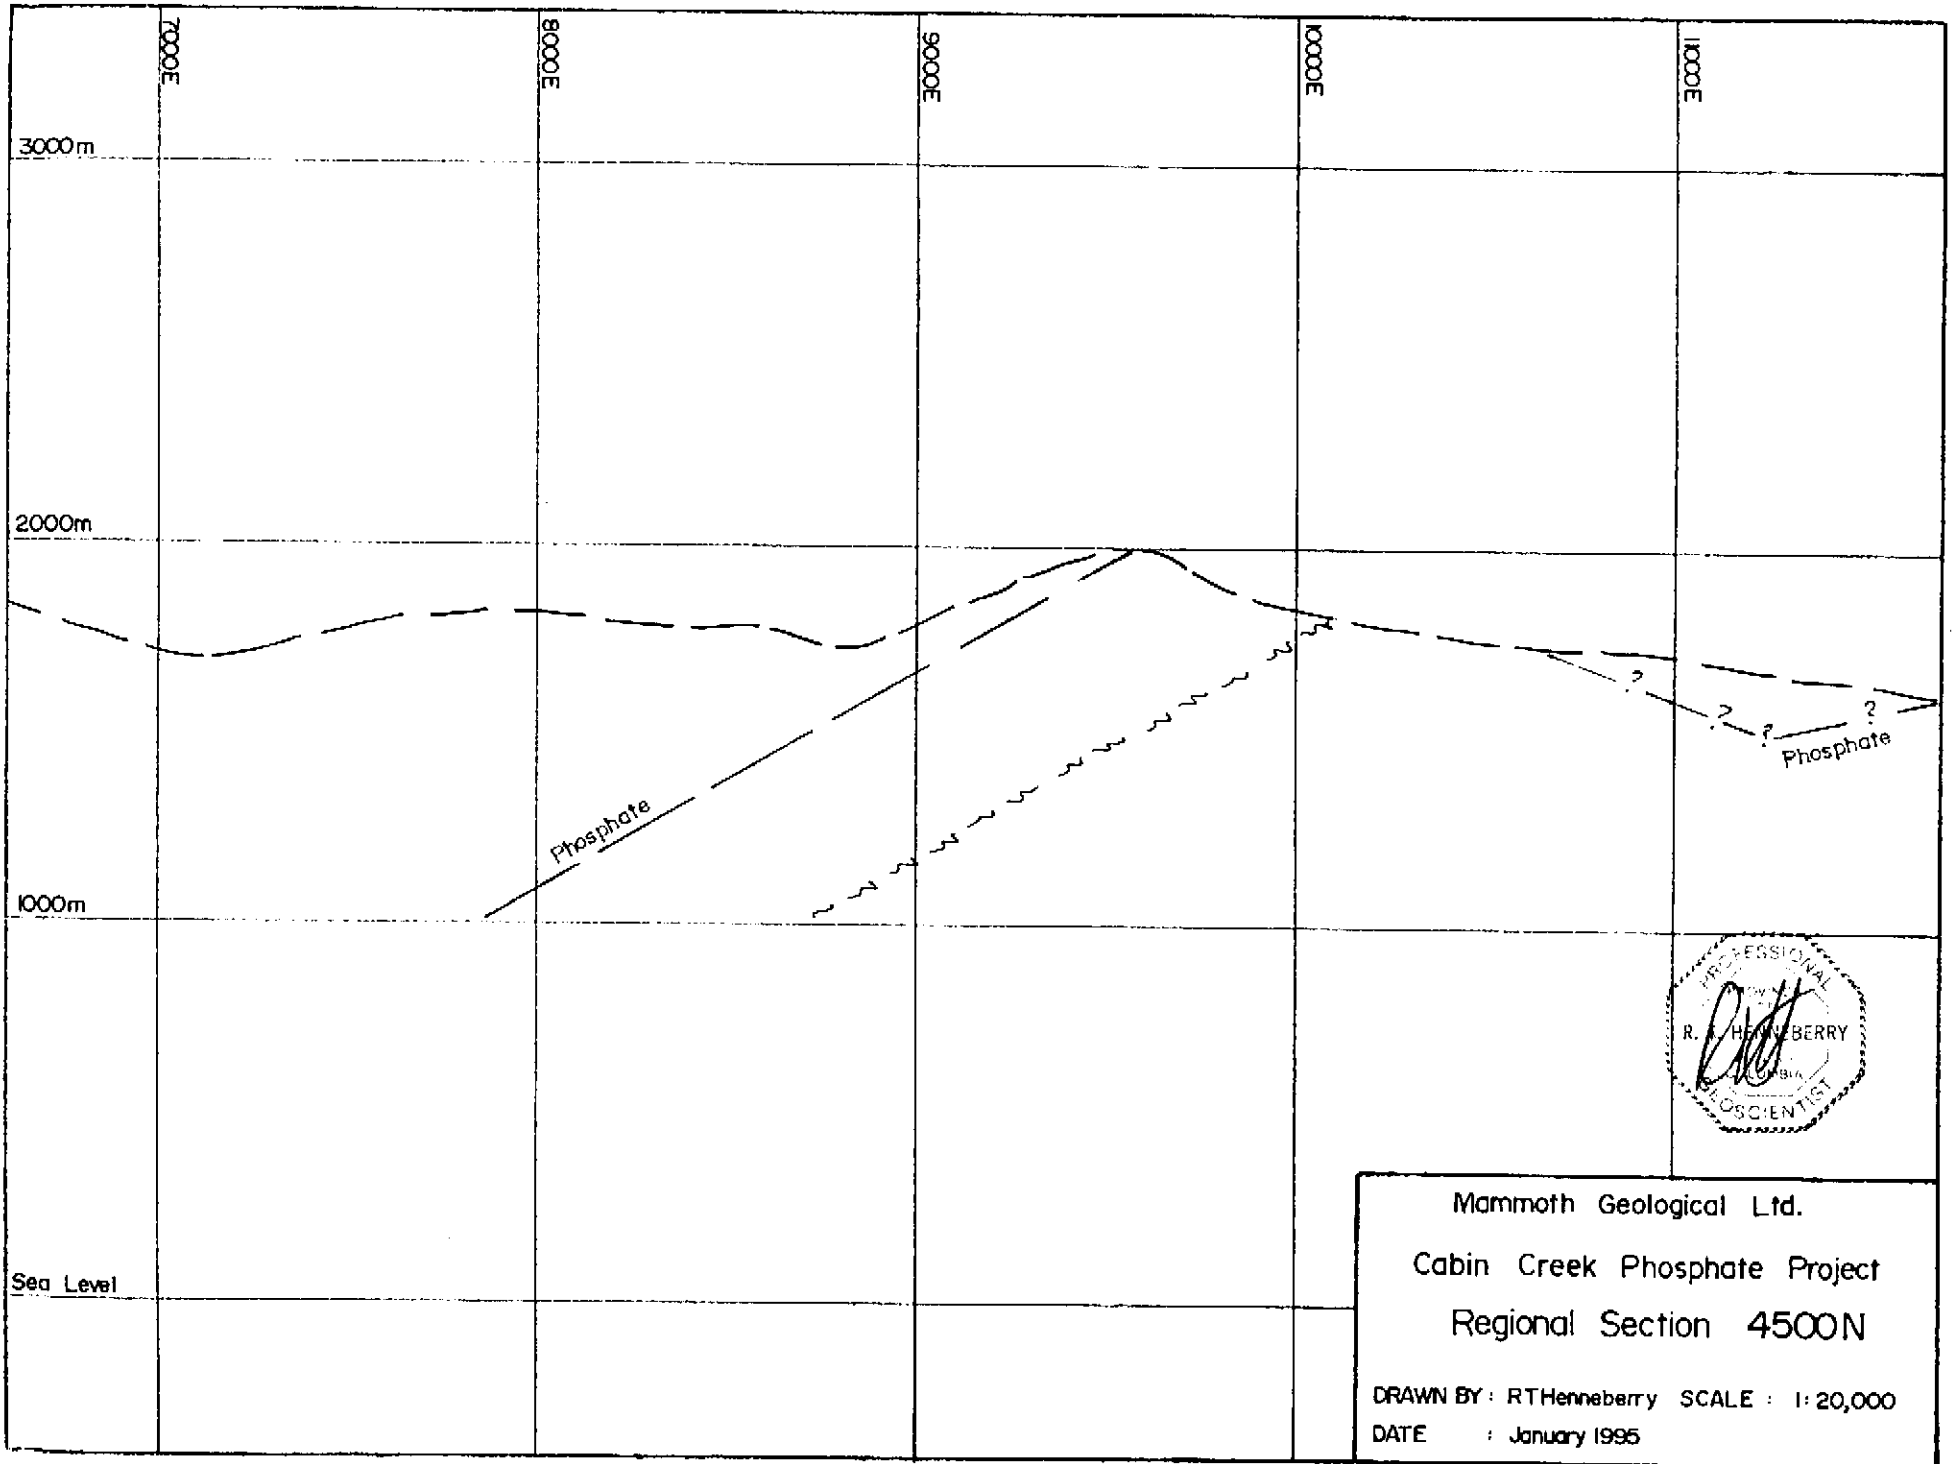



Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 4500N
 DRAWN BY: RTHenneberry SCALE : 1: 20,000
 DATE : January 1995

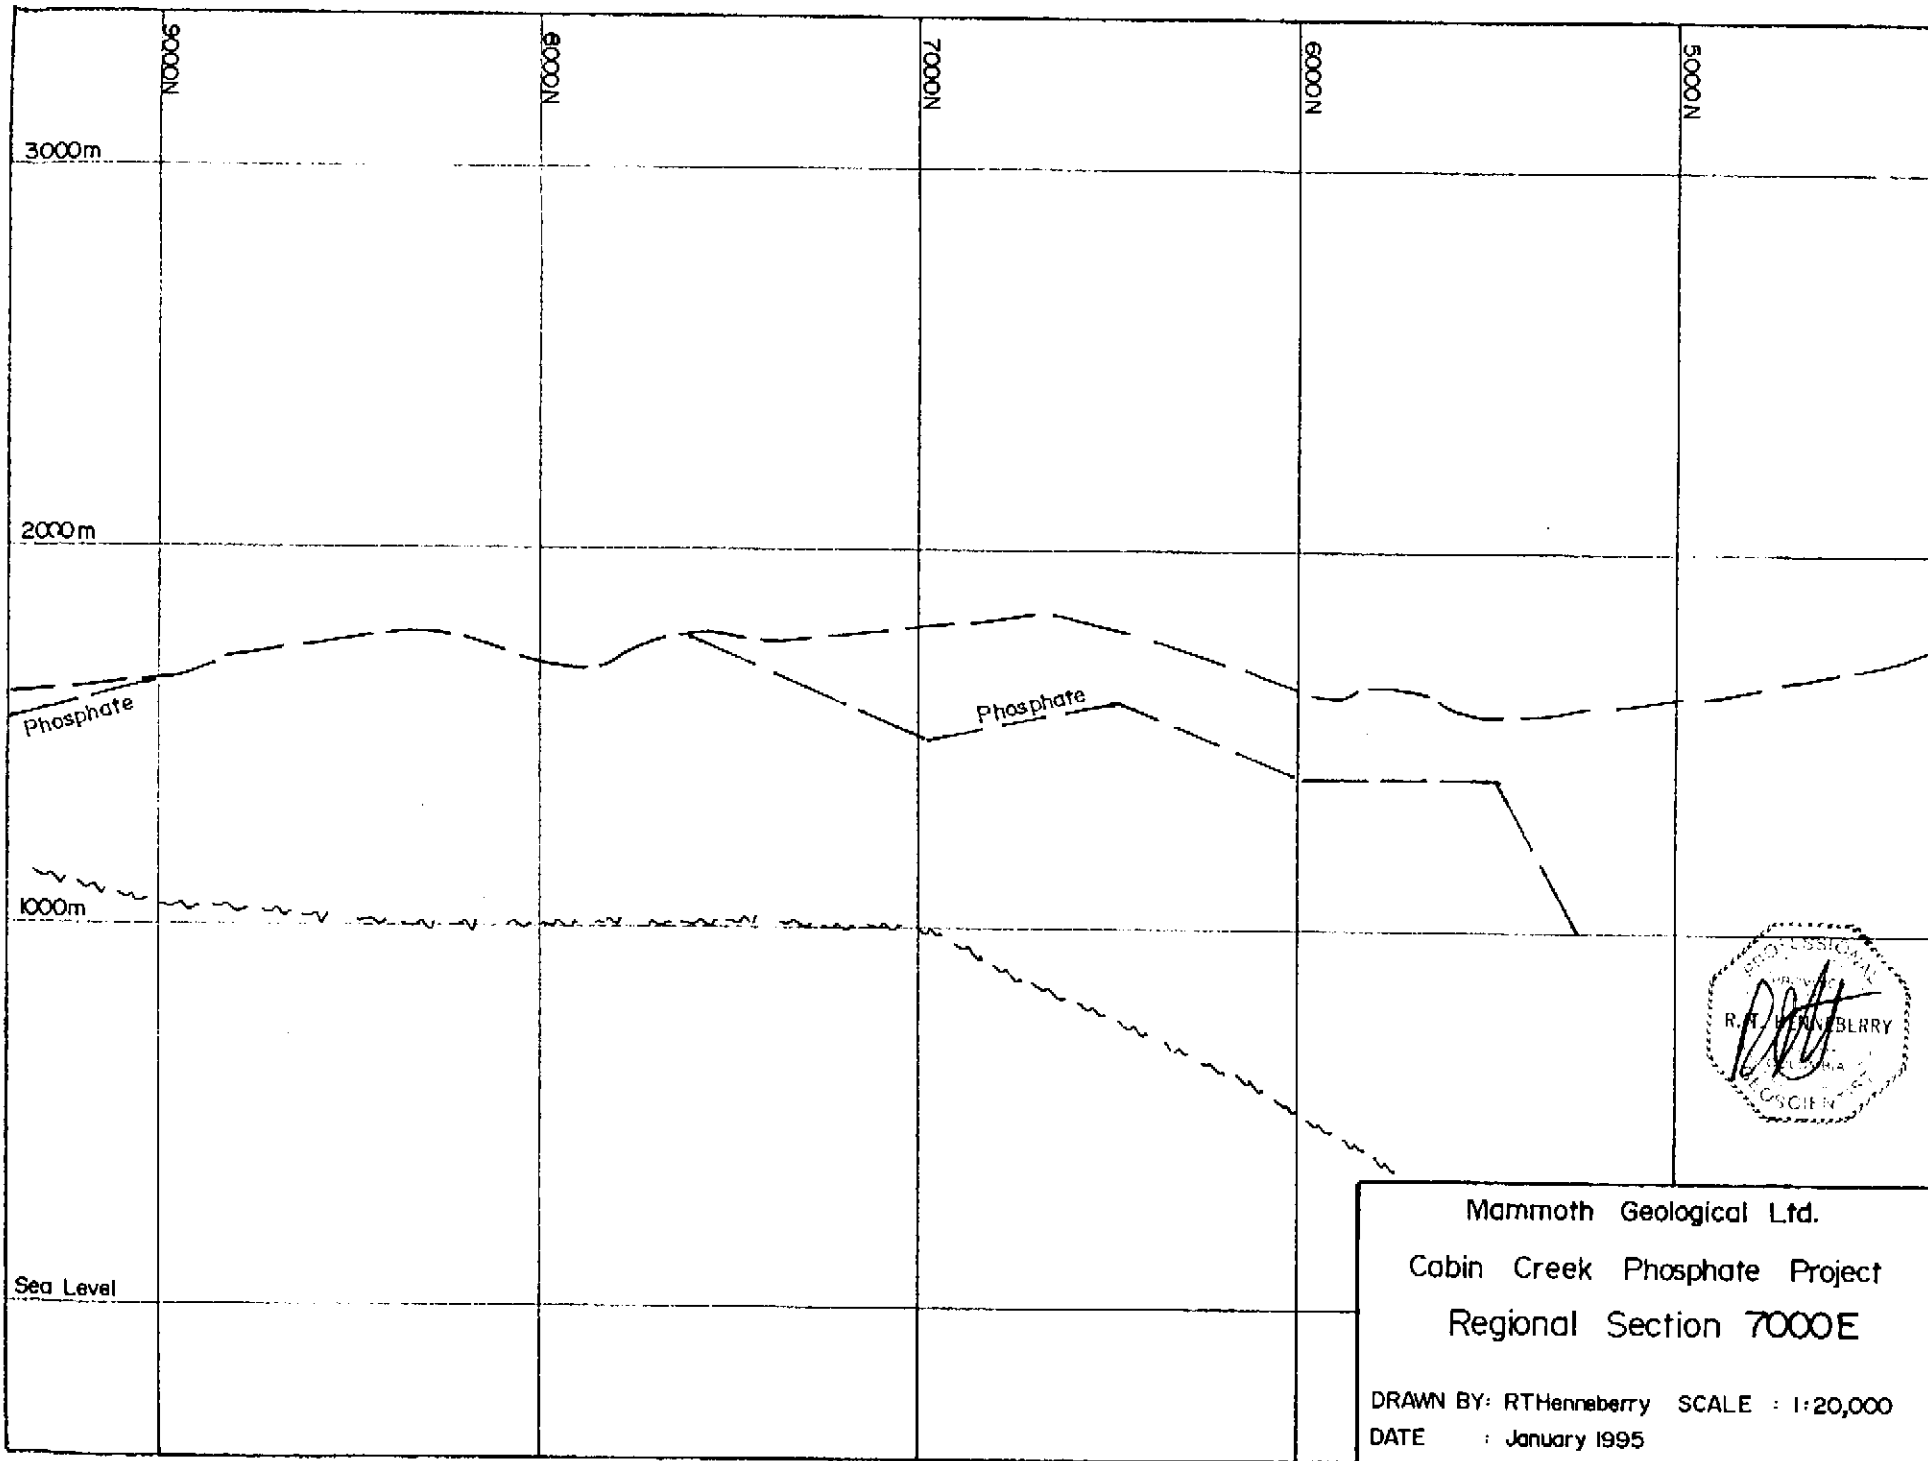

Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 7000E


DRAWN BY: RTHenneberry SCALE : 1:20,000
 DATE : January 1995

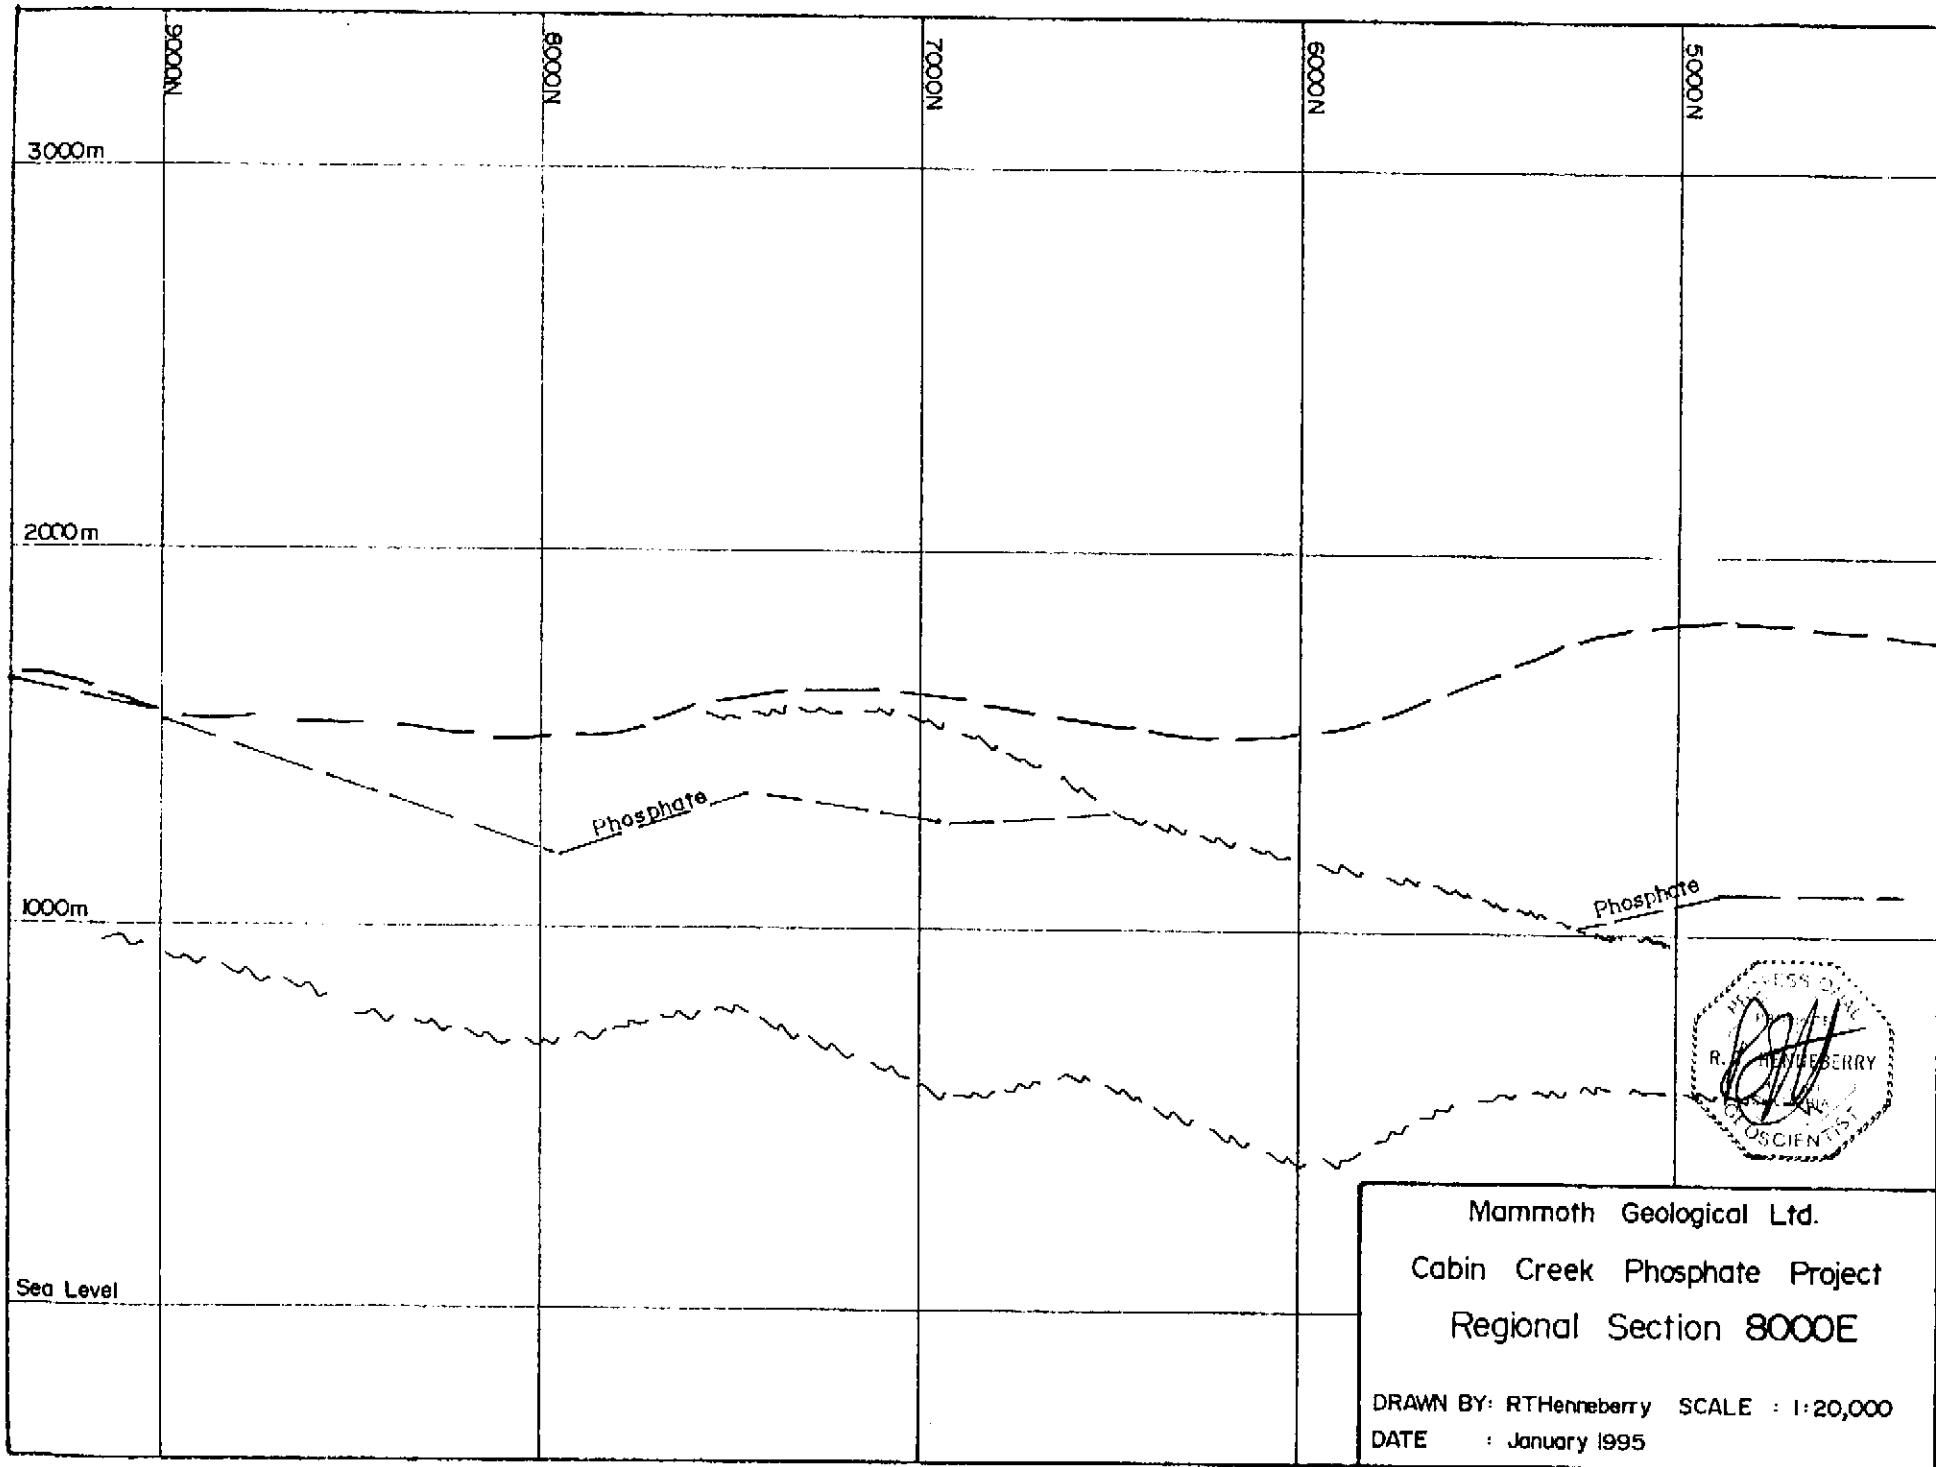

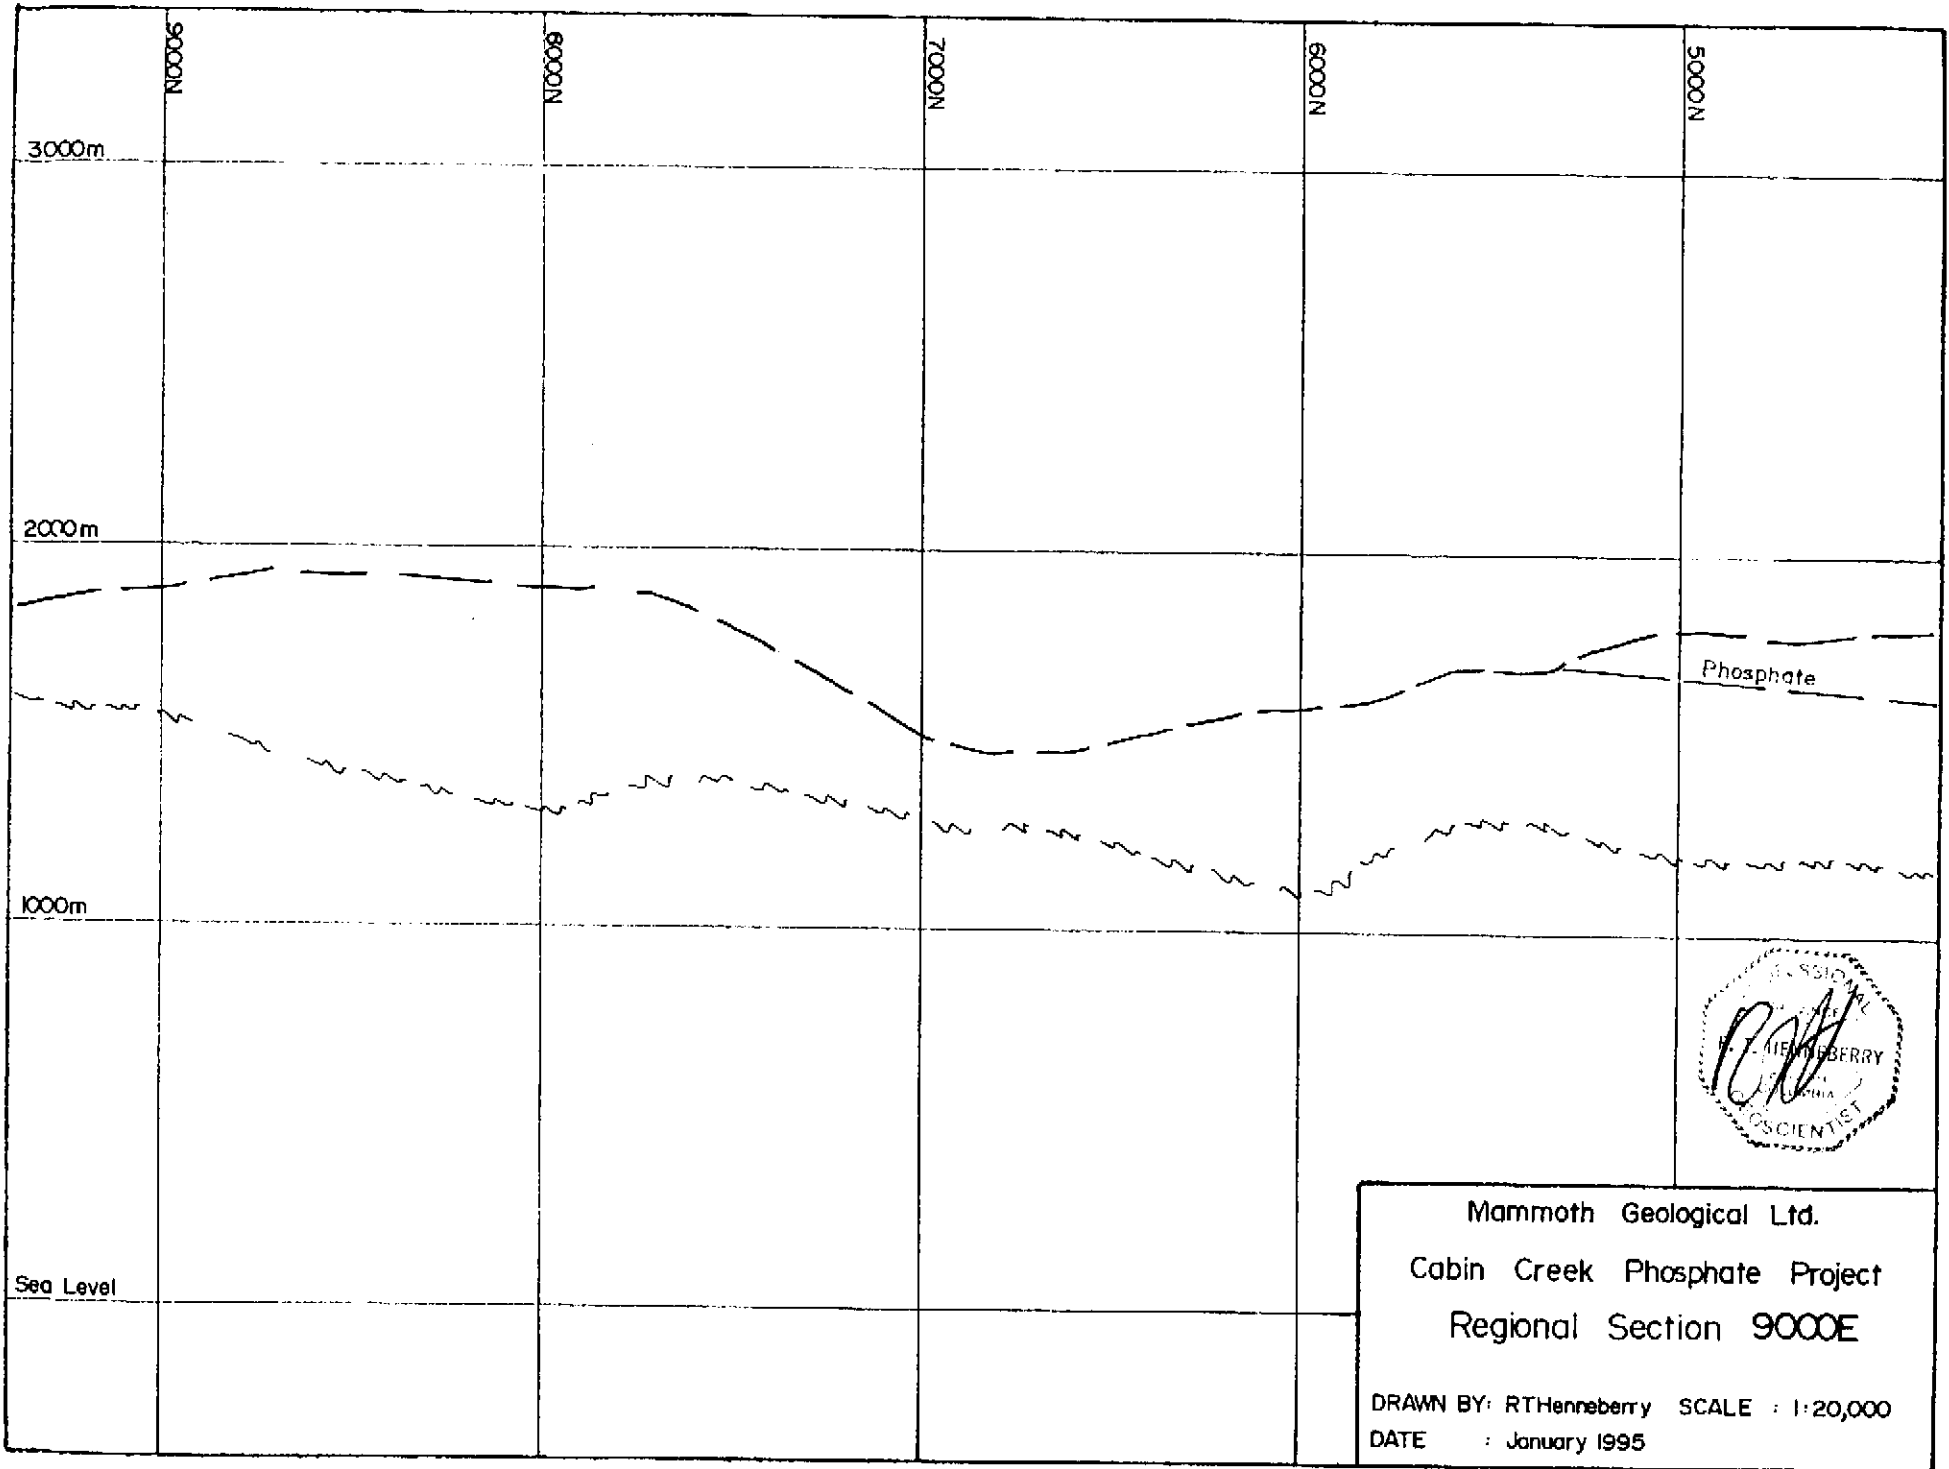


Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 9000E

DRAWN BY: R. Henneberry SCALE : 1:20,000
 DATE : January 1995

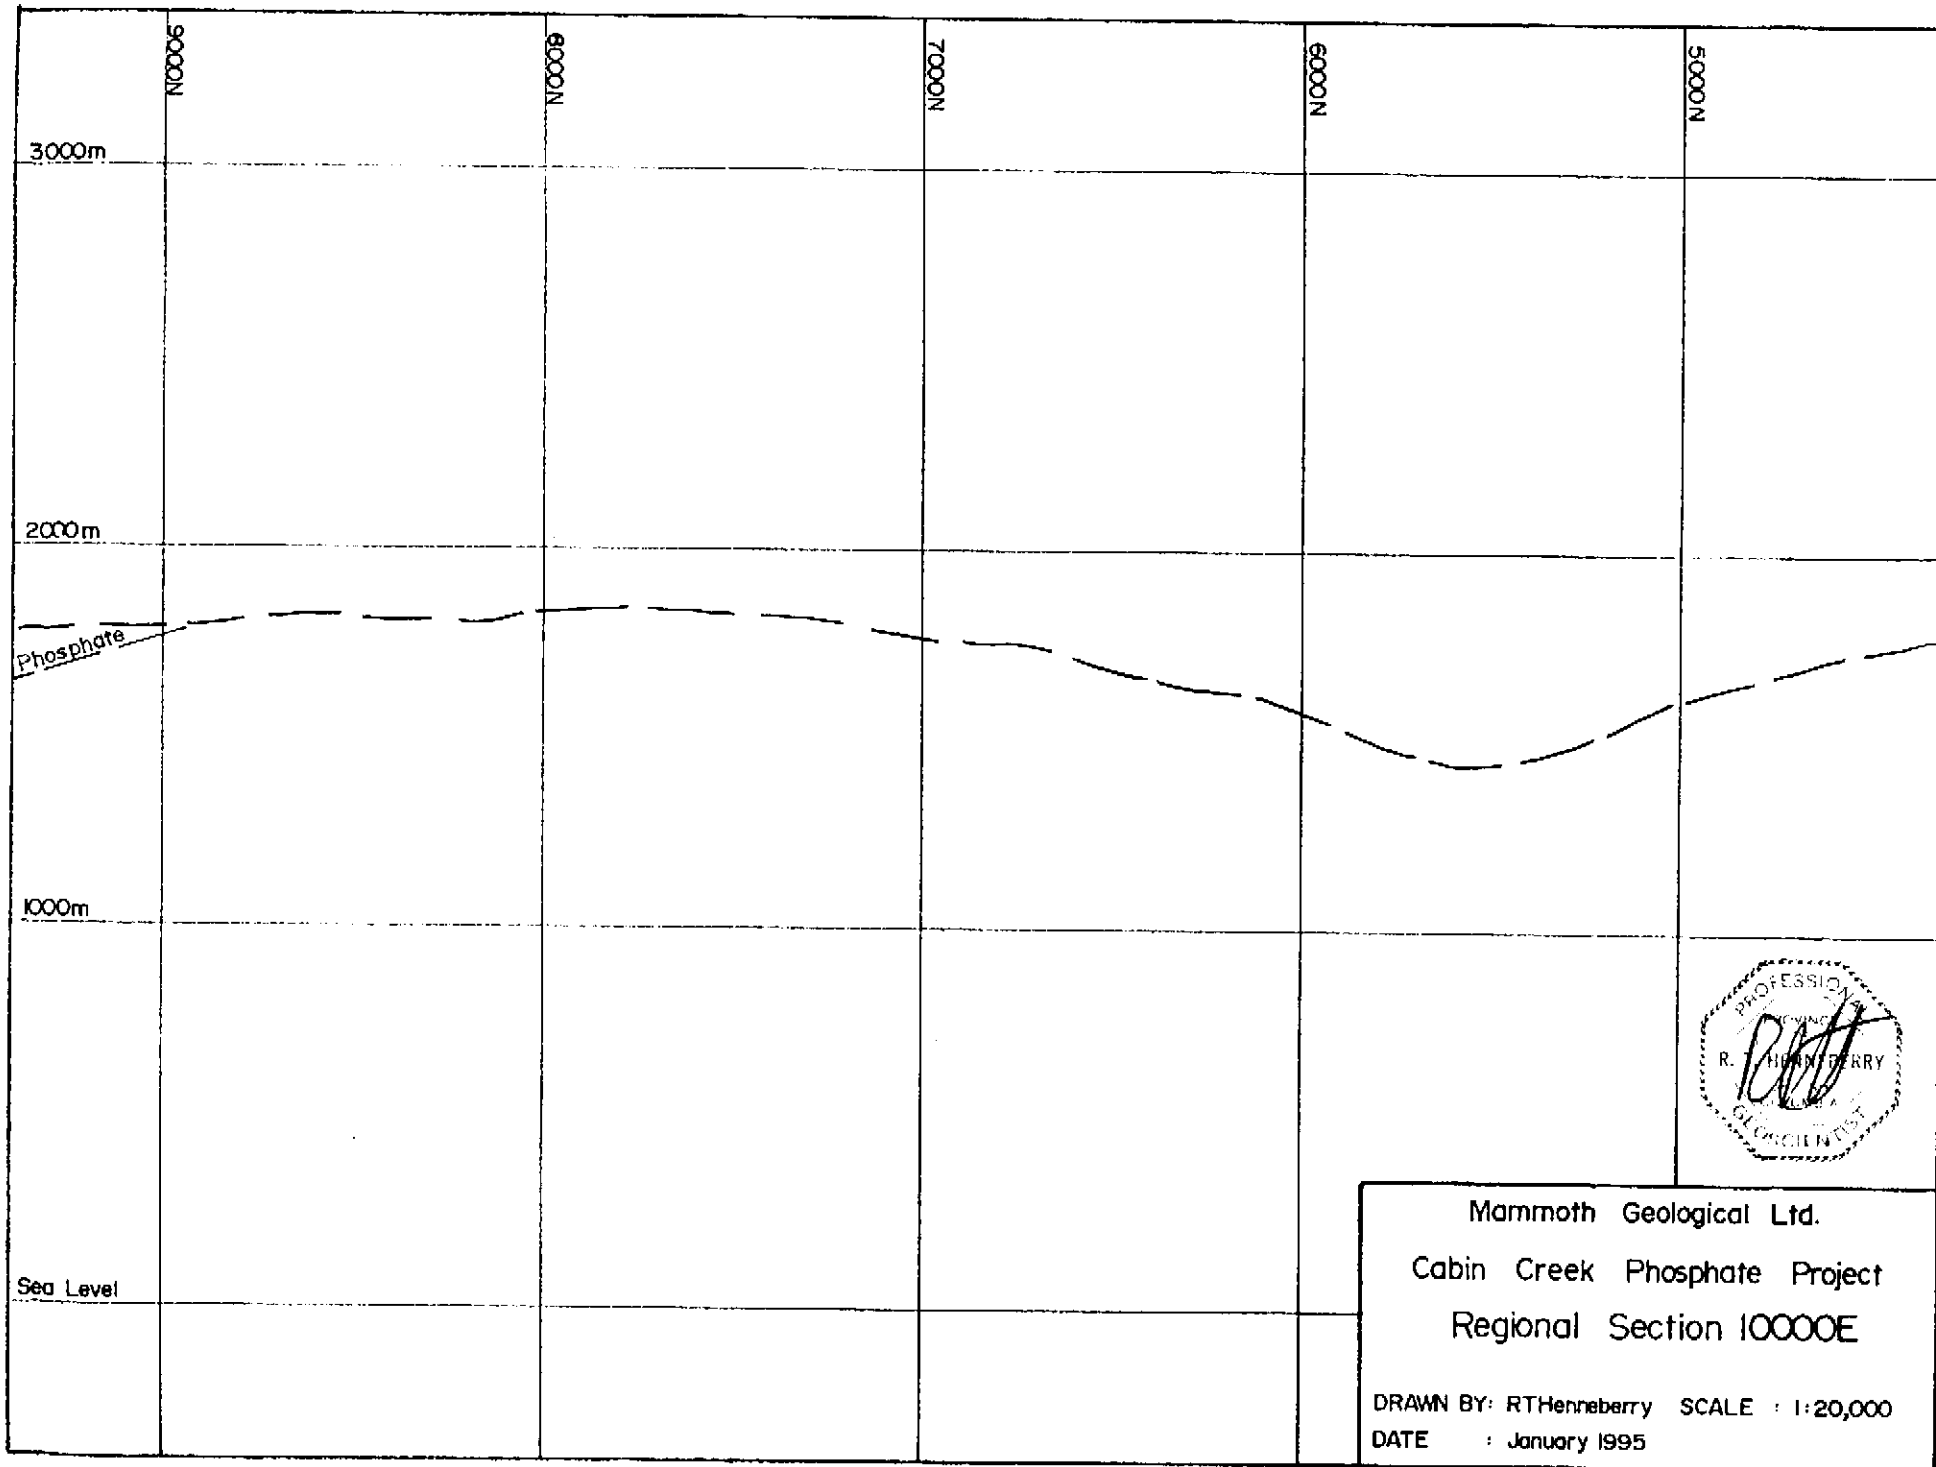




Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 10000E
 DRAWN BY: RTHenneberry SCALE : 1:20,000
 DATE : January 1995

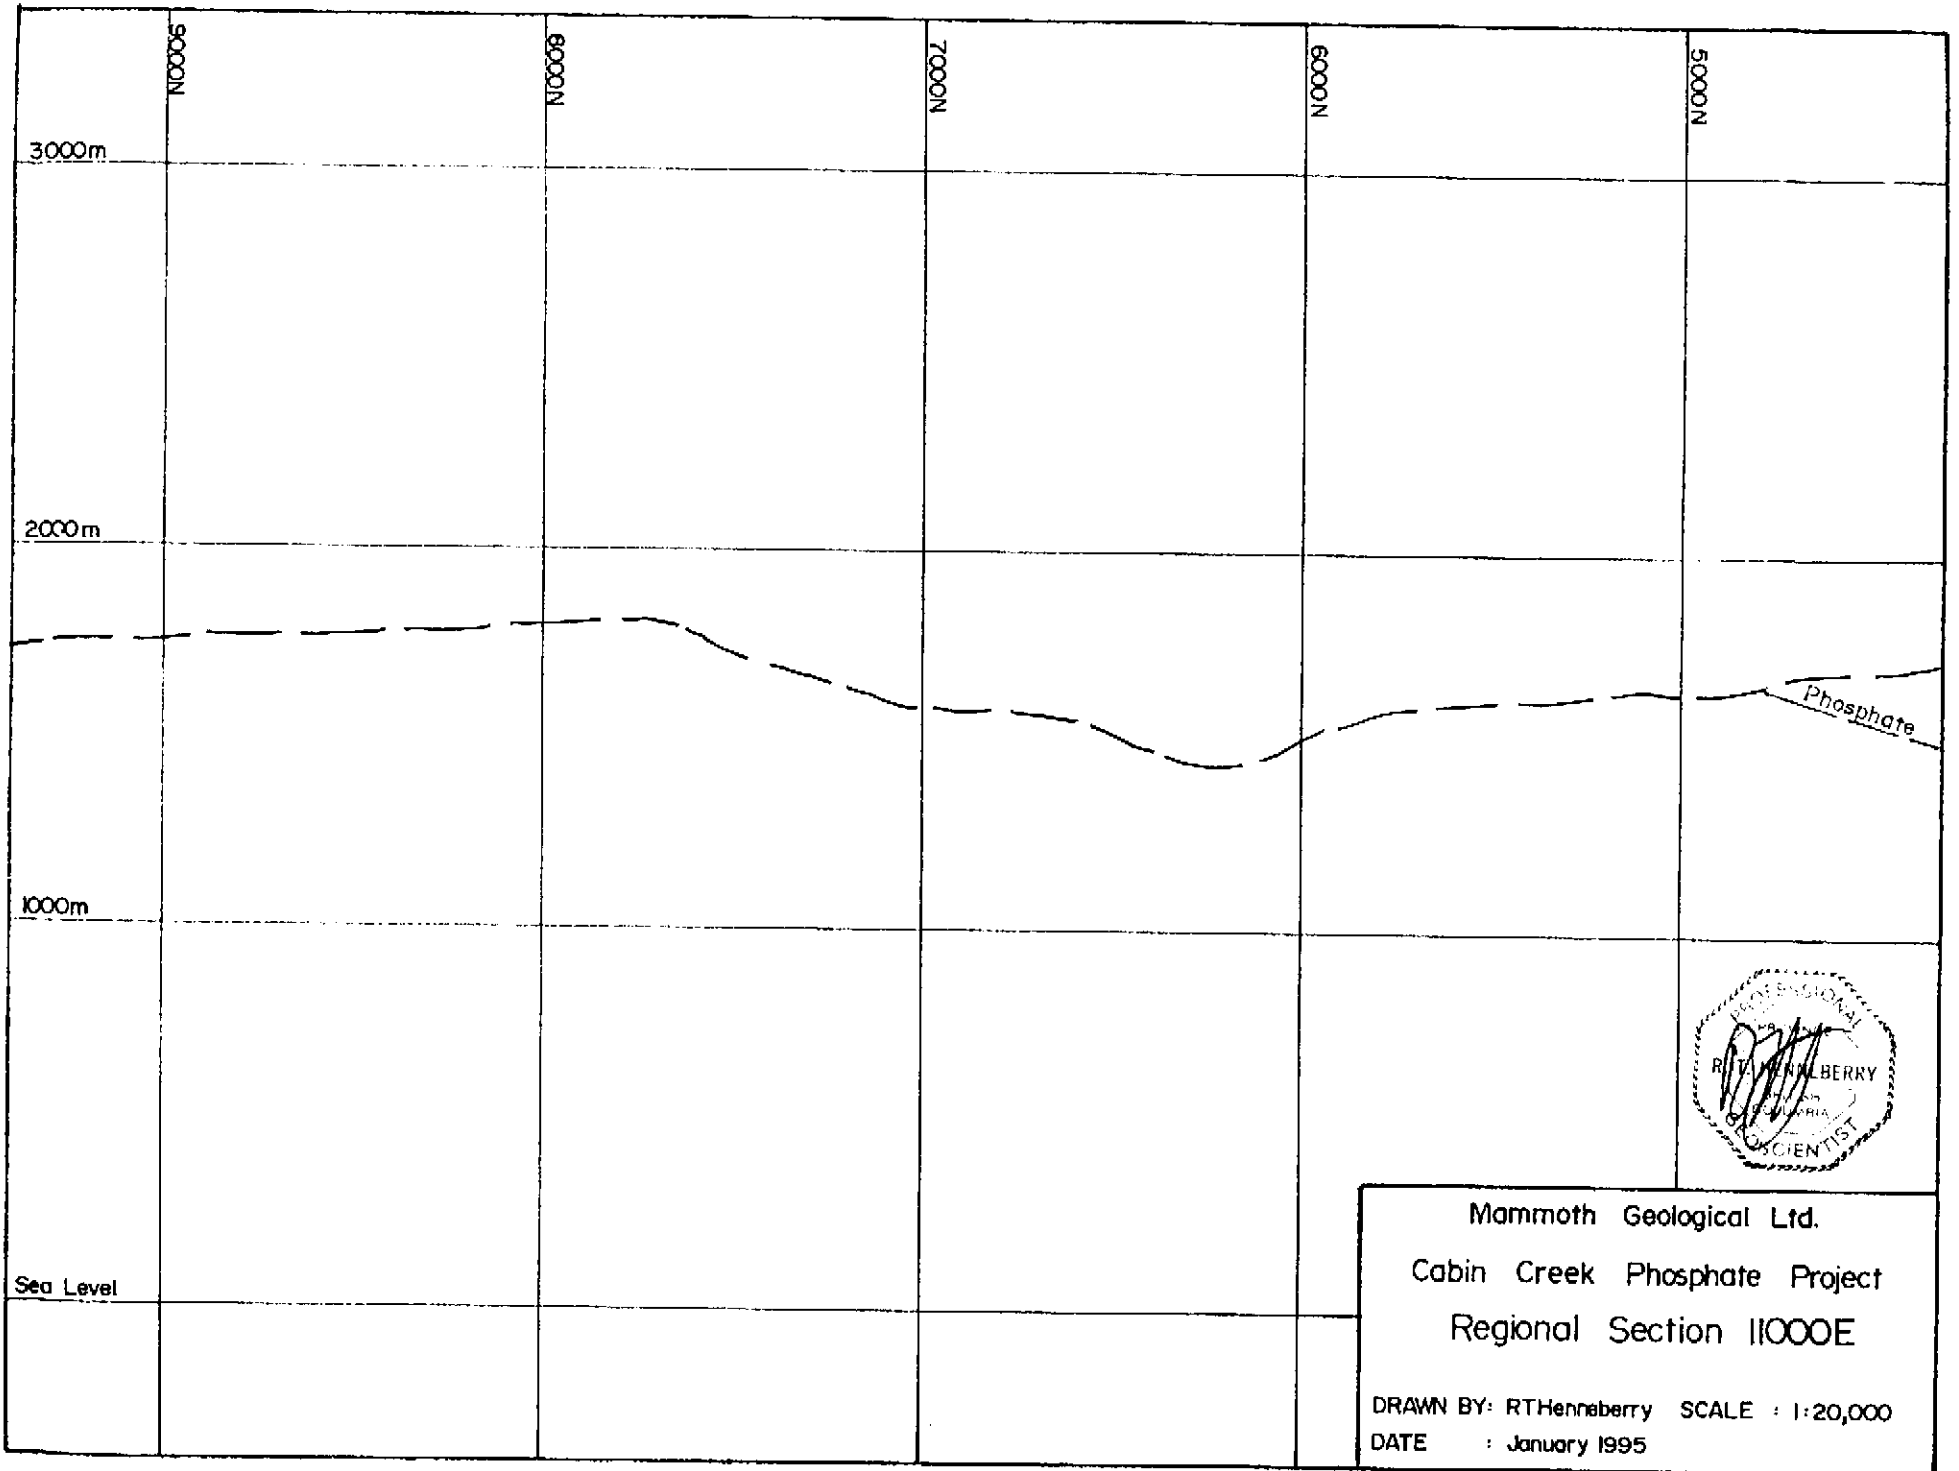


Mammoth Geological Ltd.
 Cabin Creek Phosphate Project
 Regional Section 11000E

DRAWN BY: RTHenneberry SCALE : 1:20,000
 DATE : January 1995

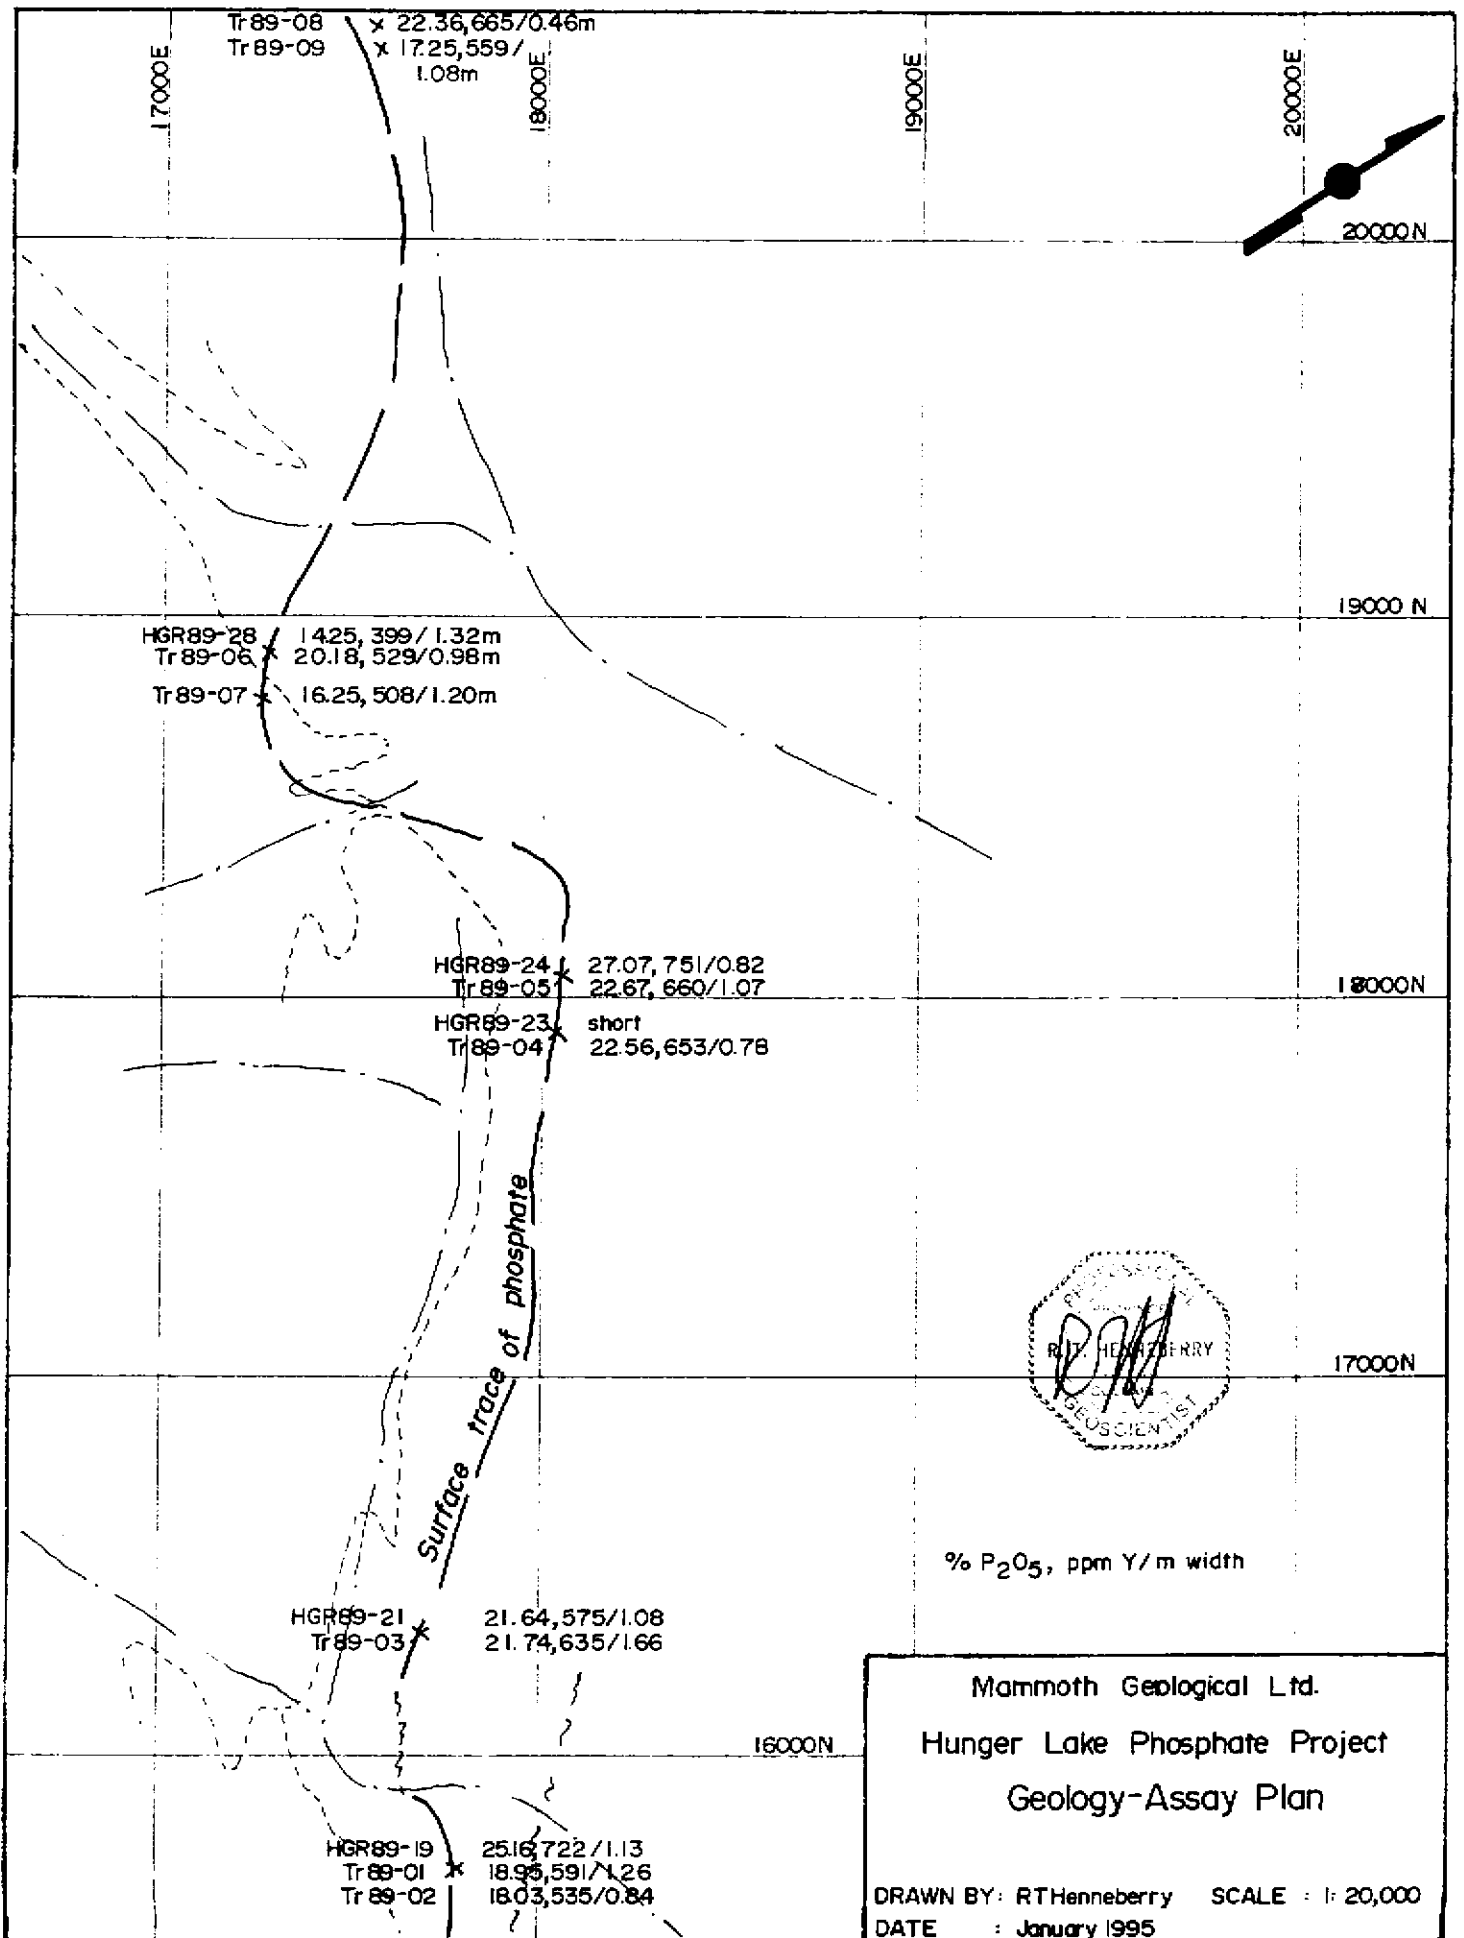


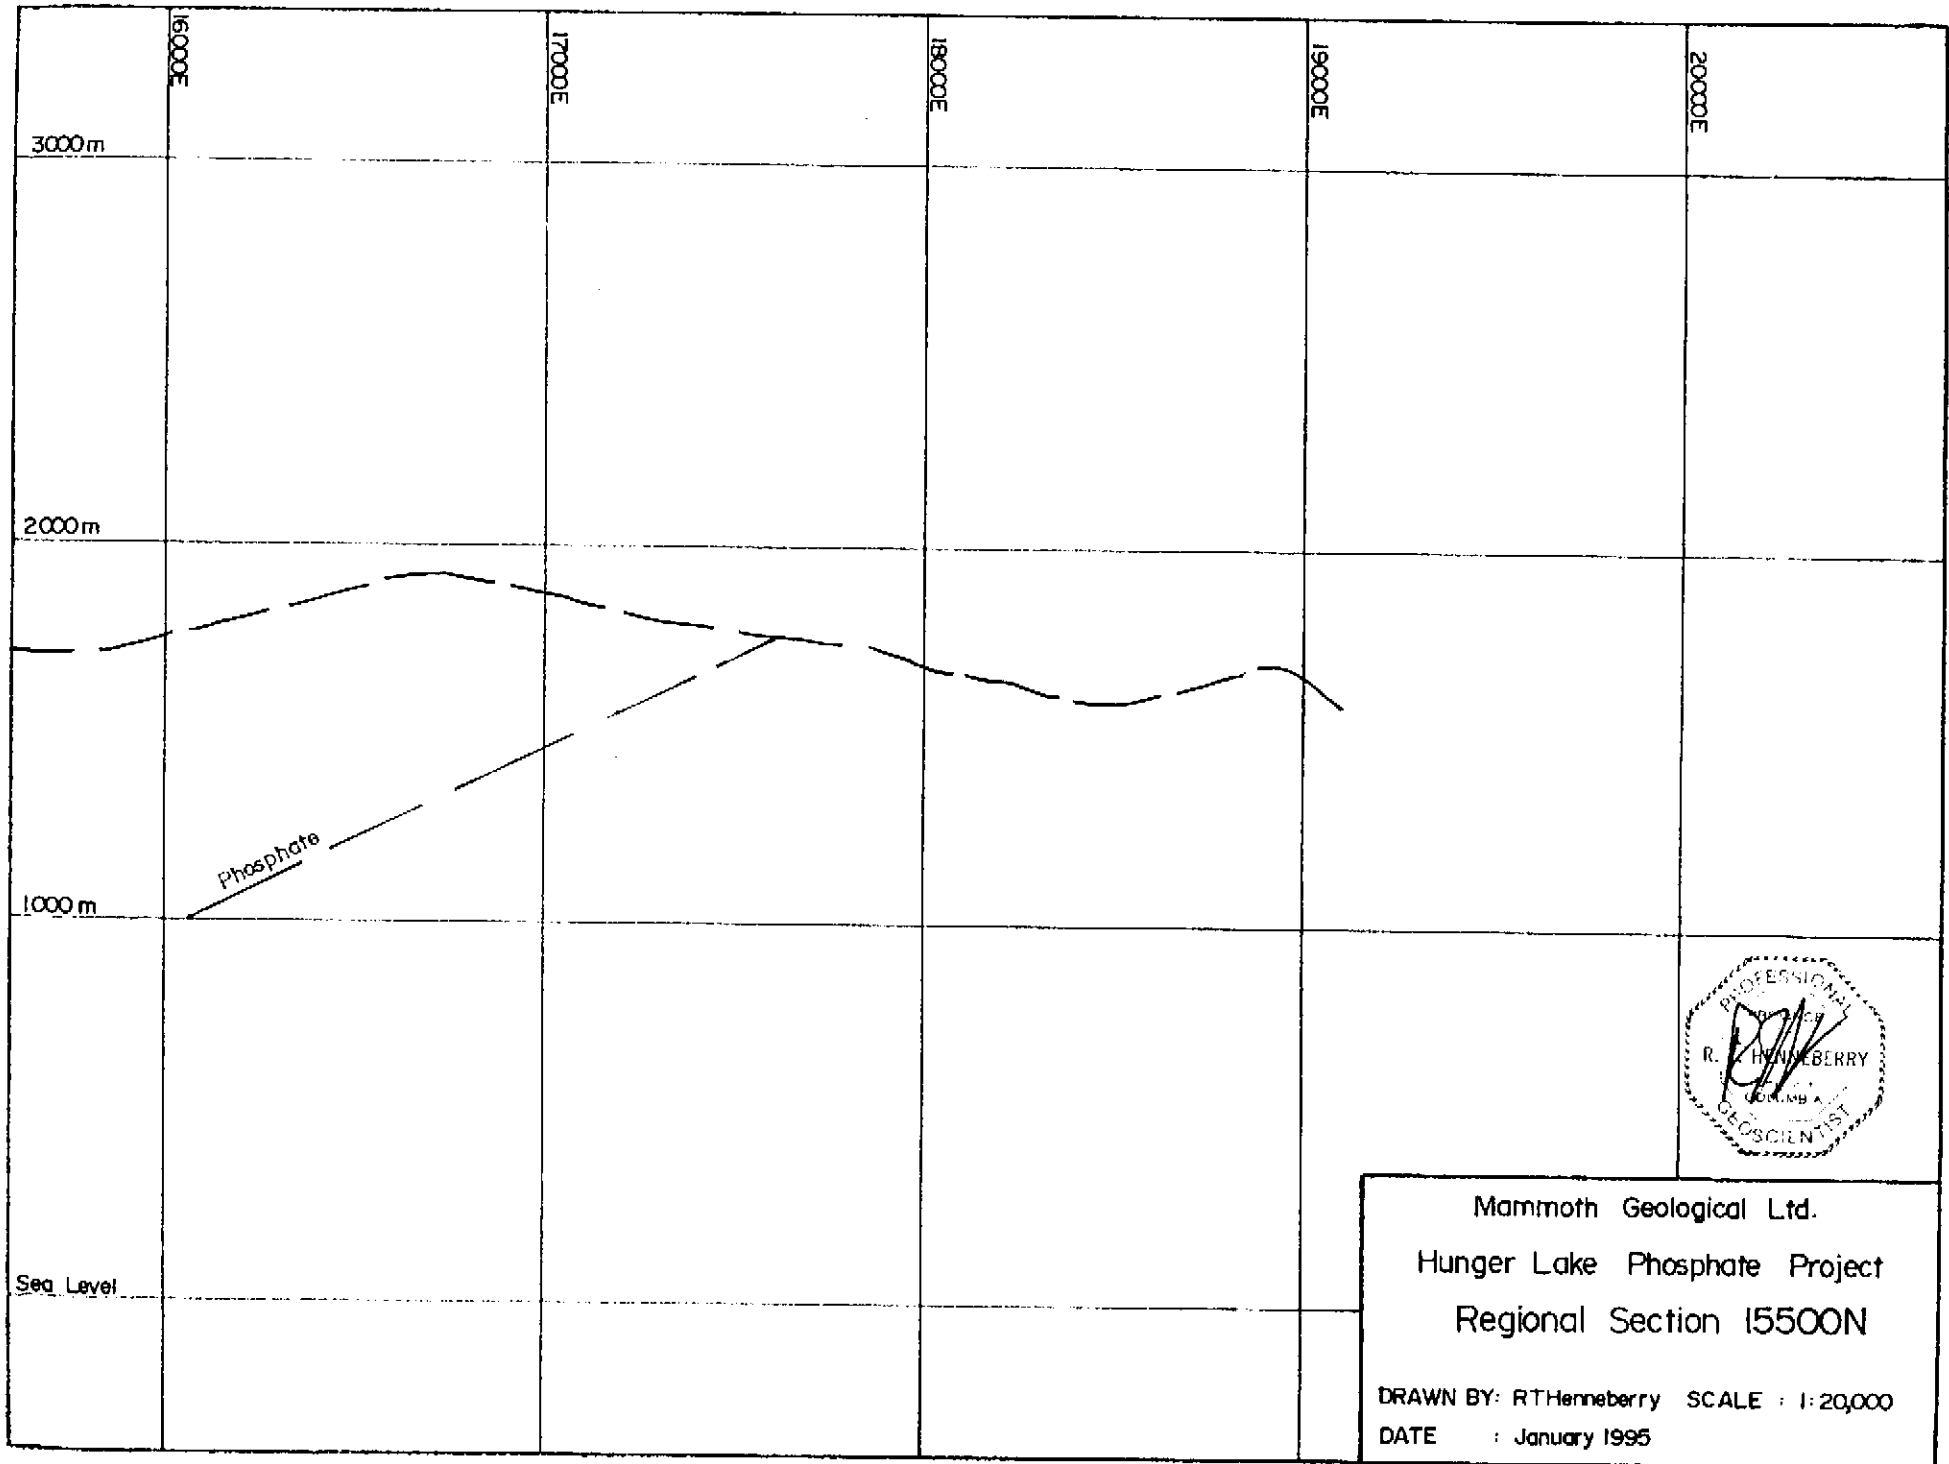


Mammoth Geological Ltd.
 Hunger Lake Phosphate Project
 Regional Section I5500N
 DRAWN BY: R.Henneberry SCALE : 1:20,000
 DATE : January 1995

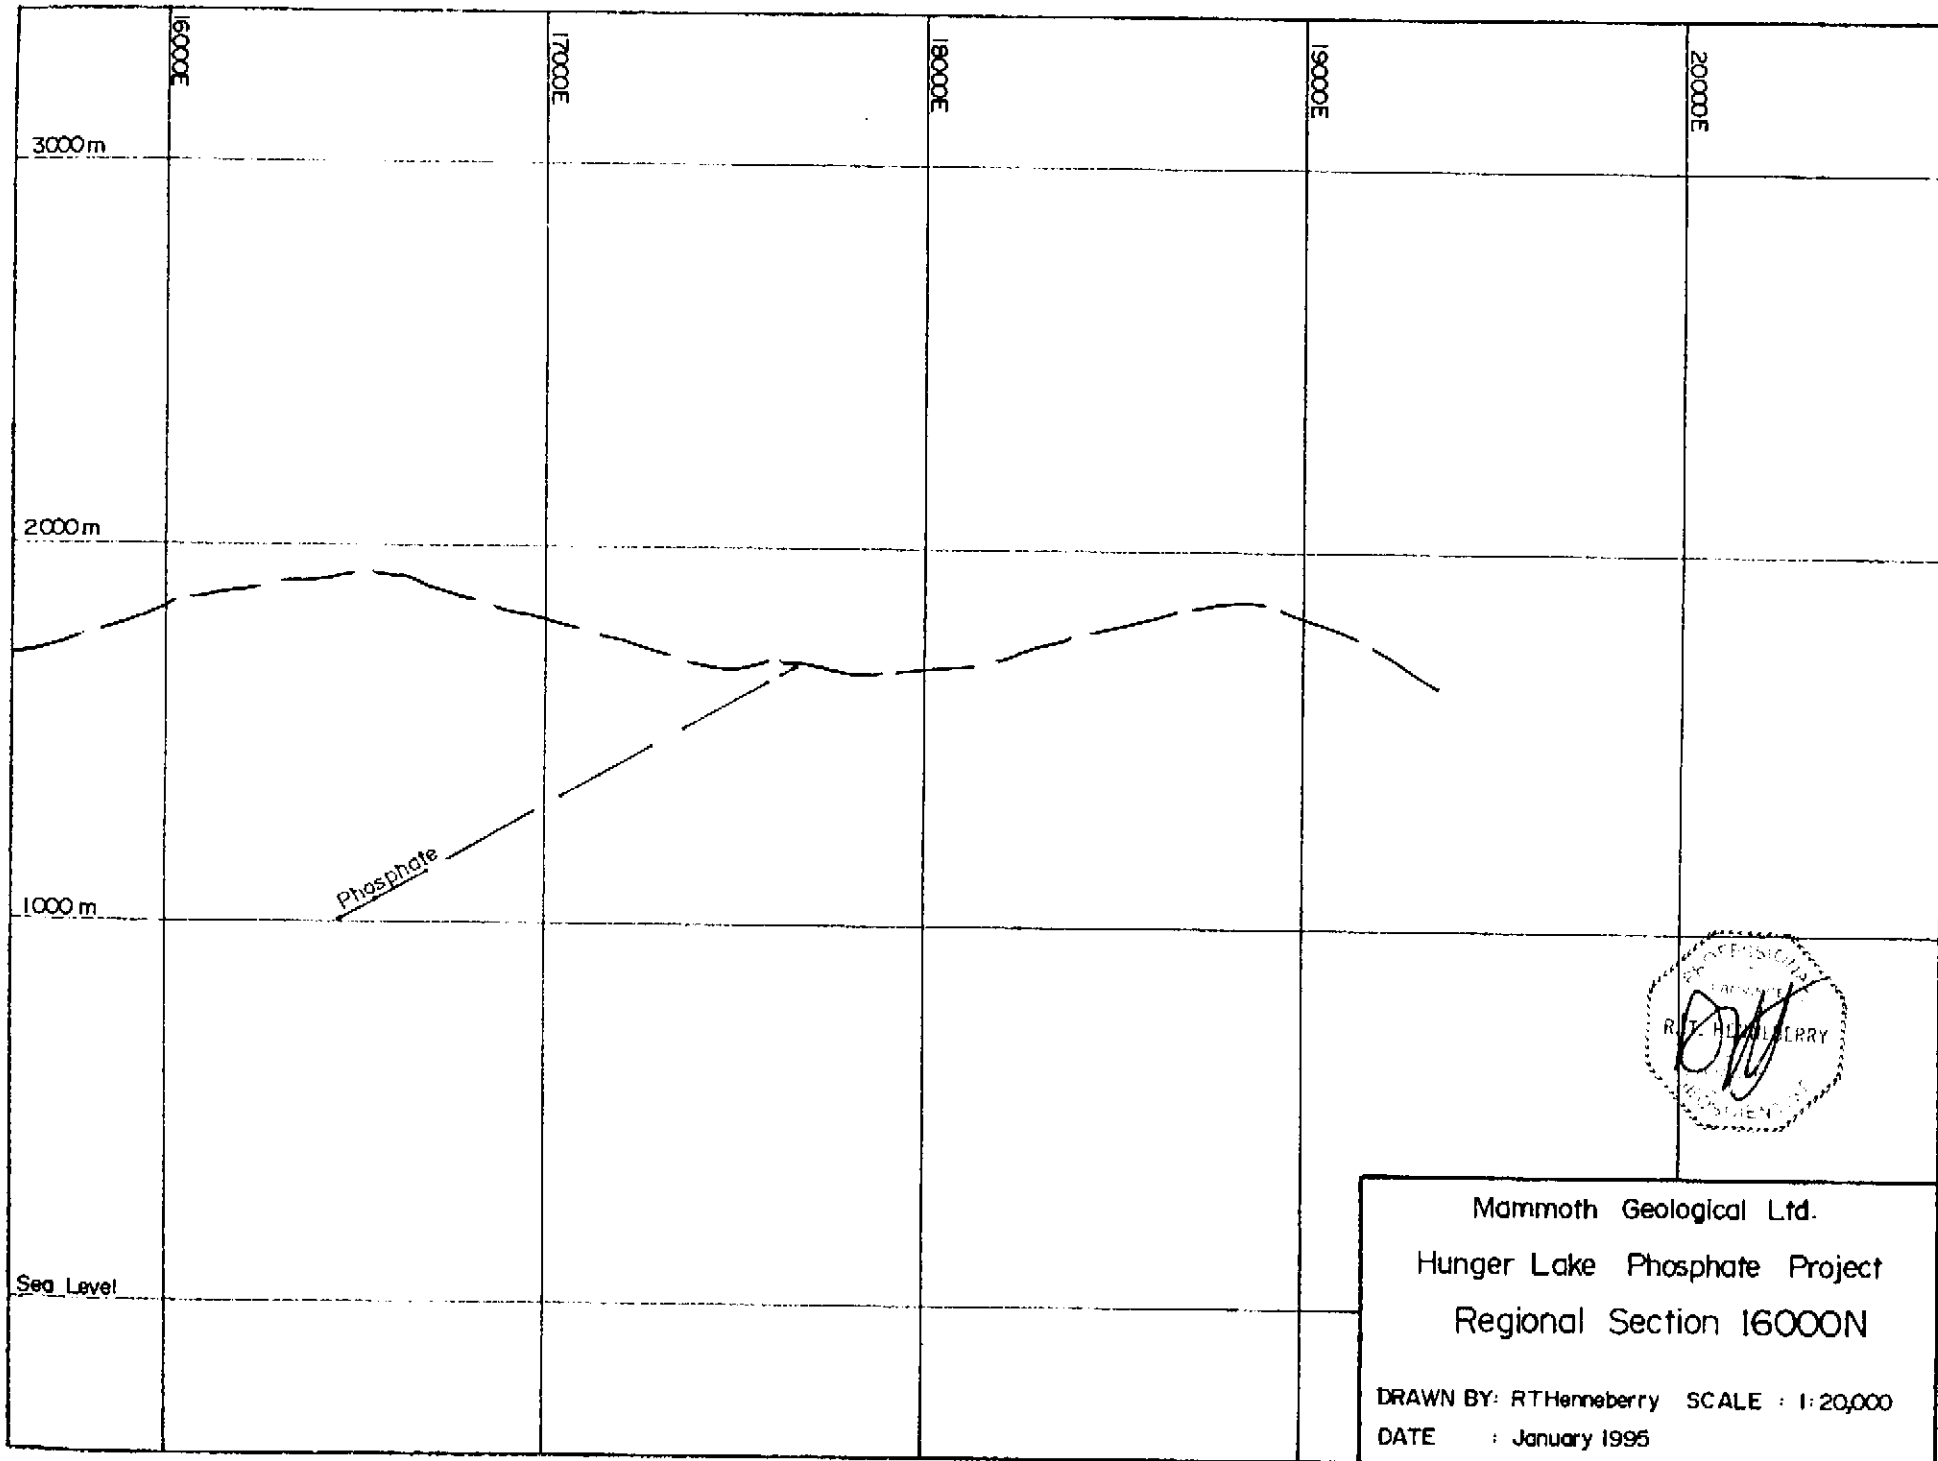


Mammoth Geological Ltd.
Hunger Lake Phosphate Project
Regional Section 16000N
DRAWN BY: RTHenneberry SCALE : 1:20,000
DATE : January 1995

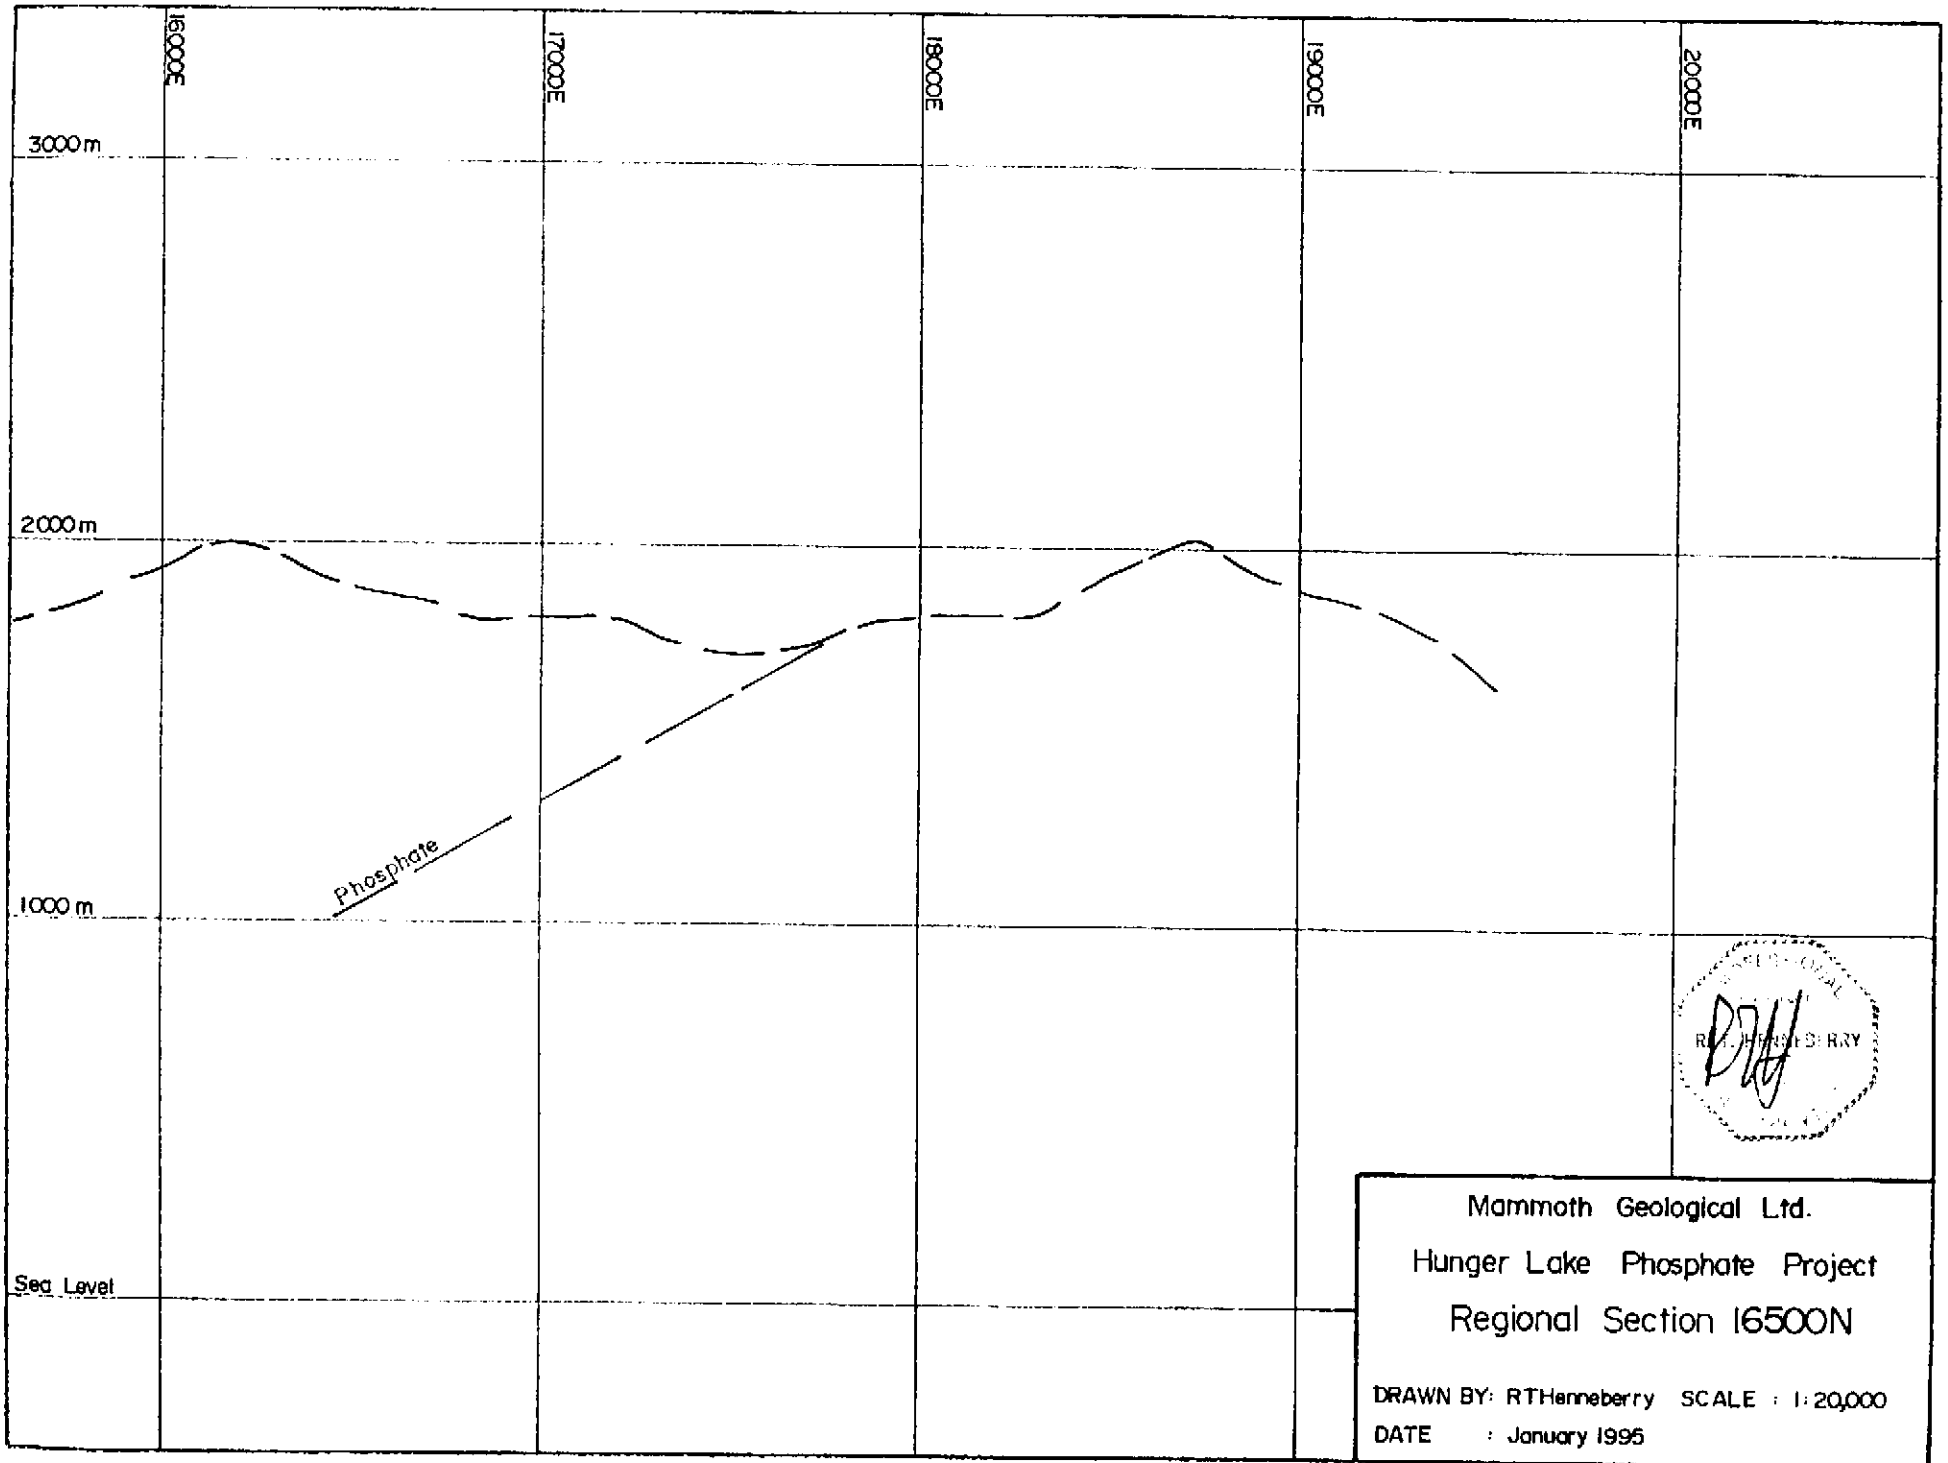

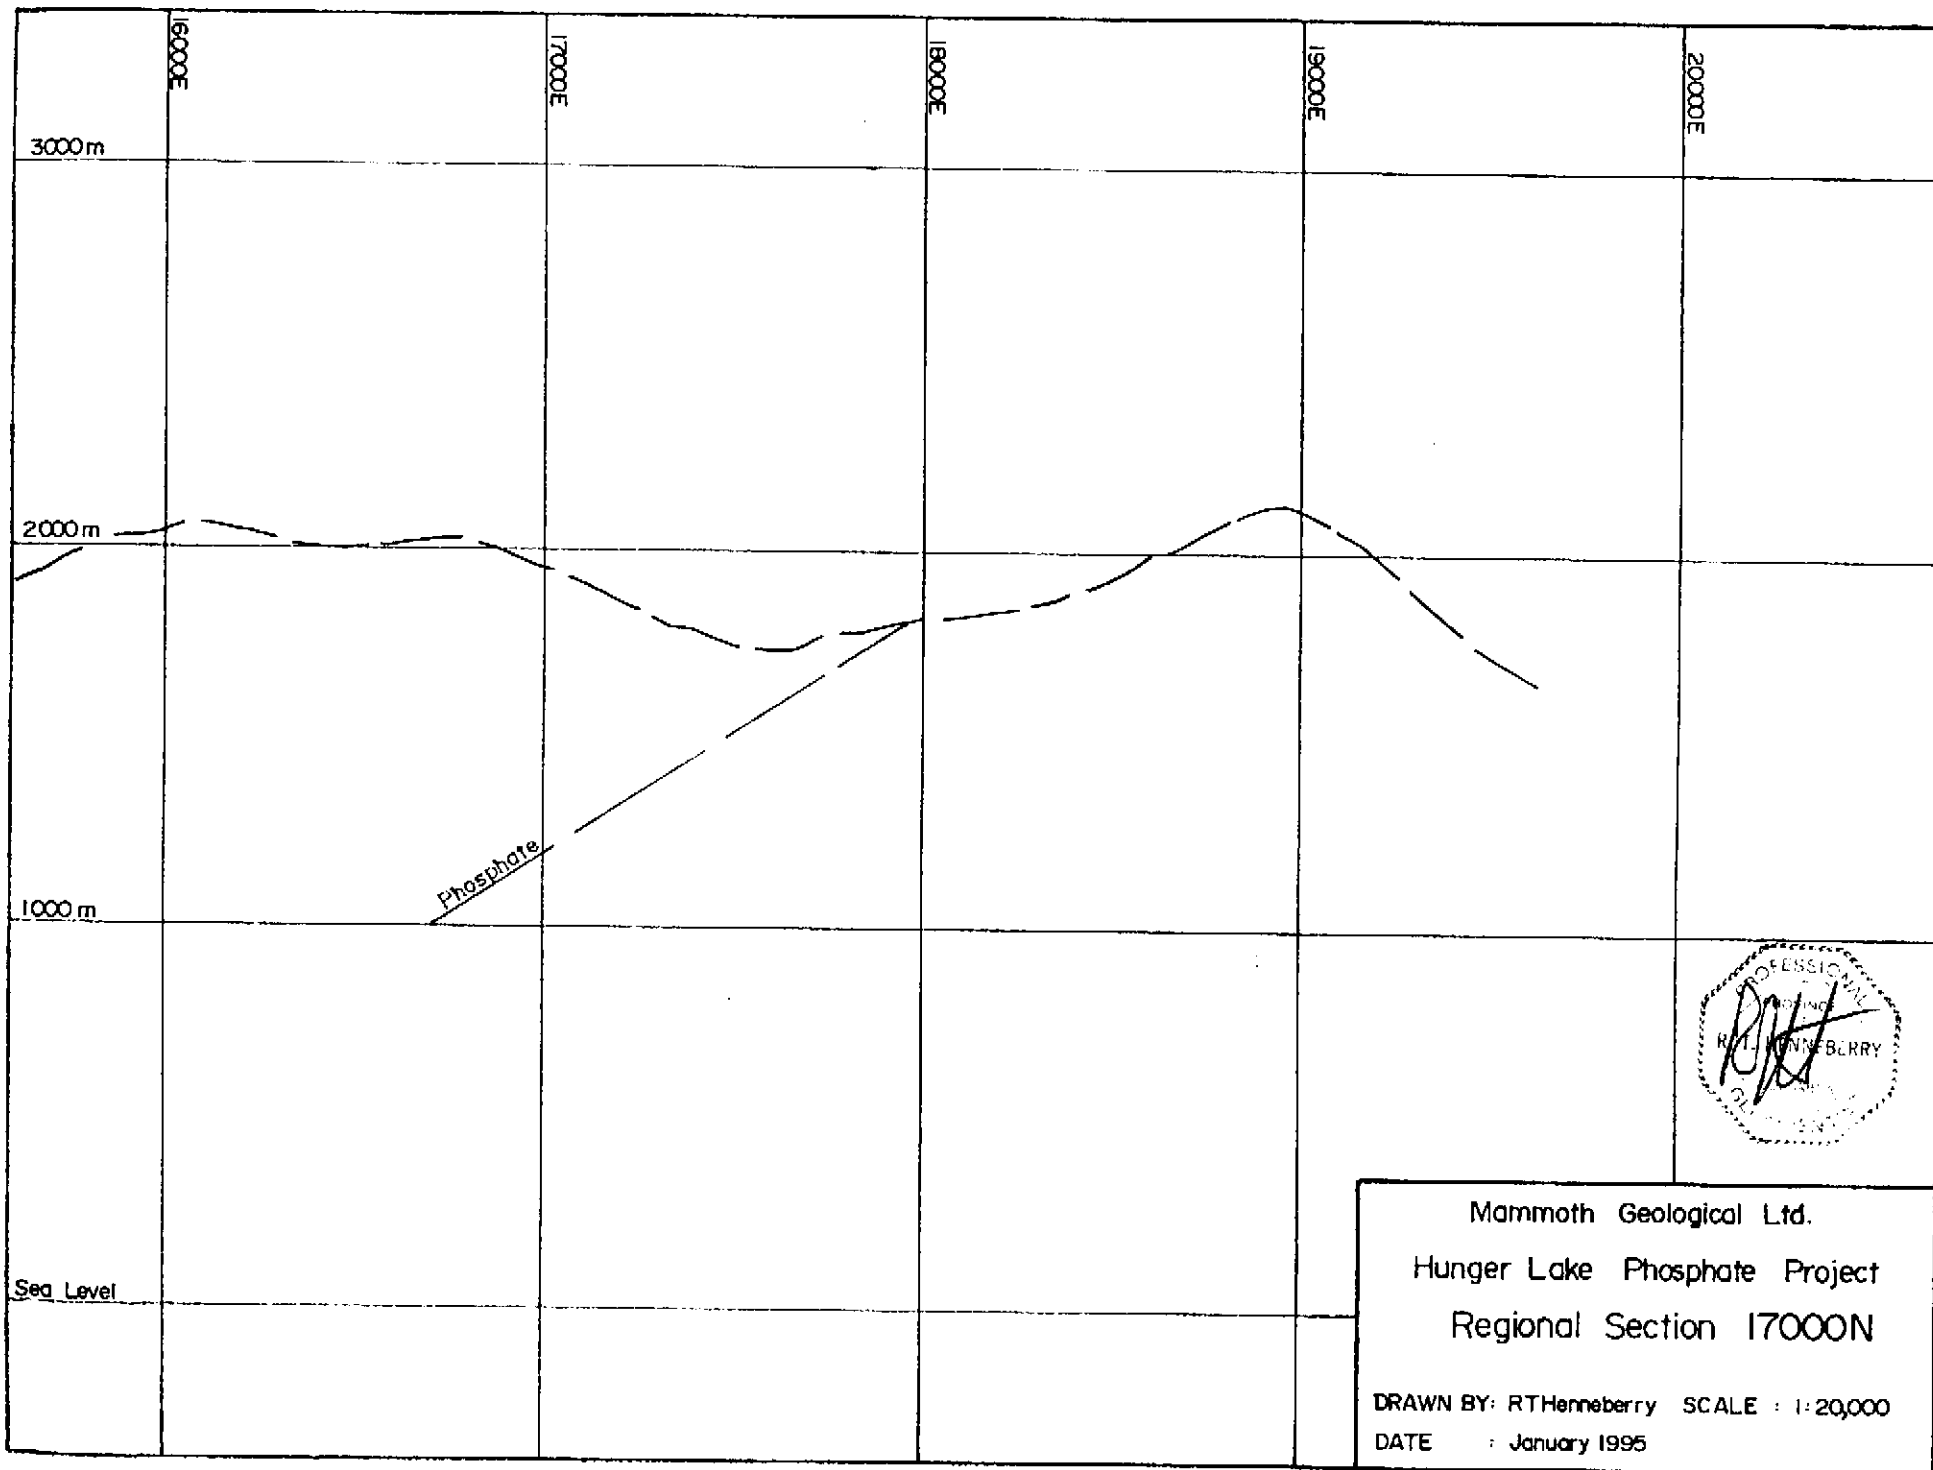


Mammoth Geological Ltd.
 Hunger Lake Phosphate Project
 Regional Section 17000N

DRAWN BY: RTHenneberry SCALE : 1:20,000
 DATE : January 1995

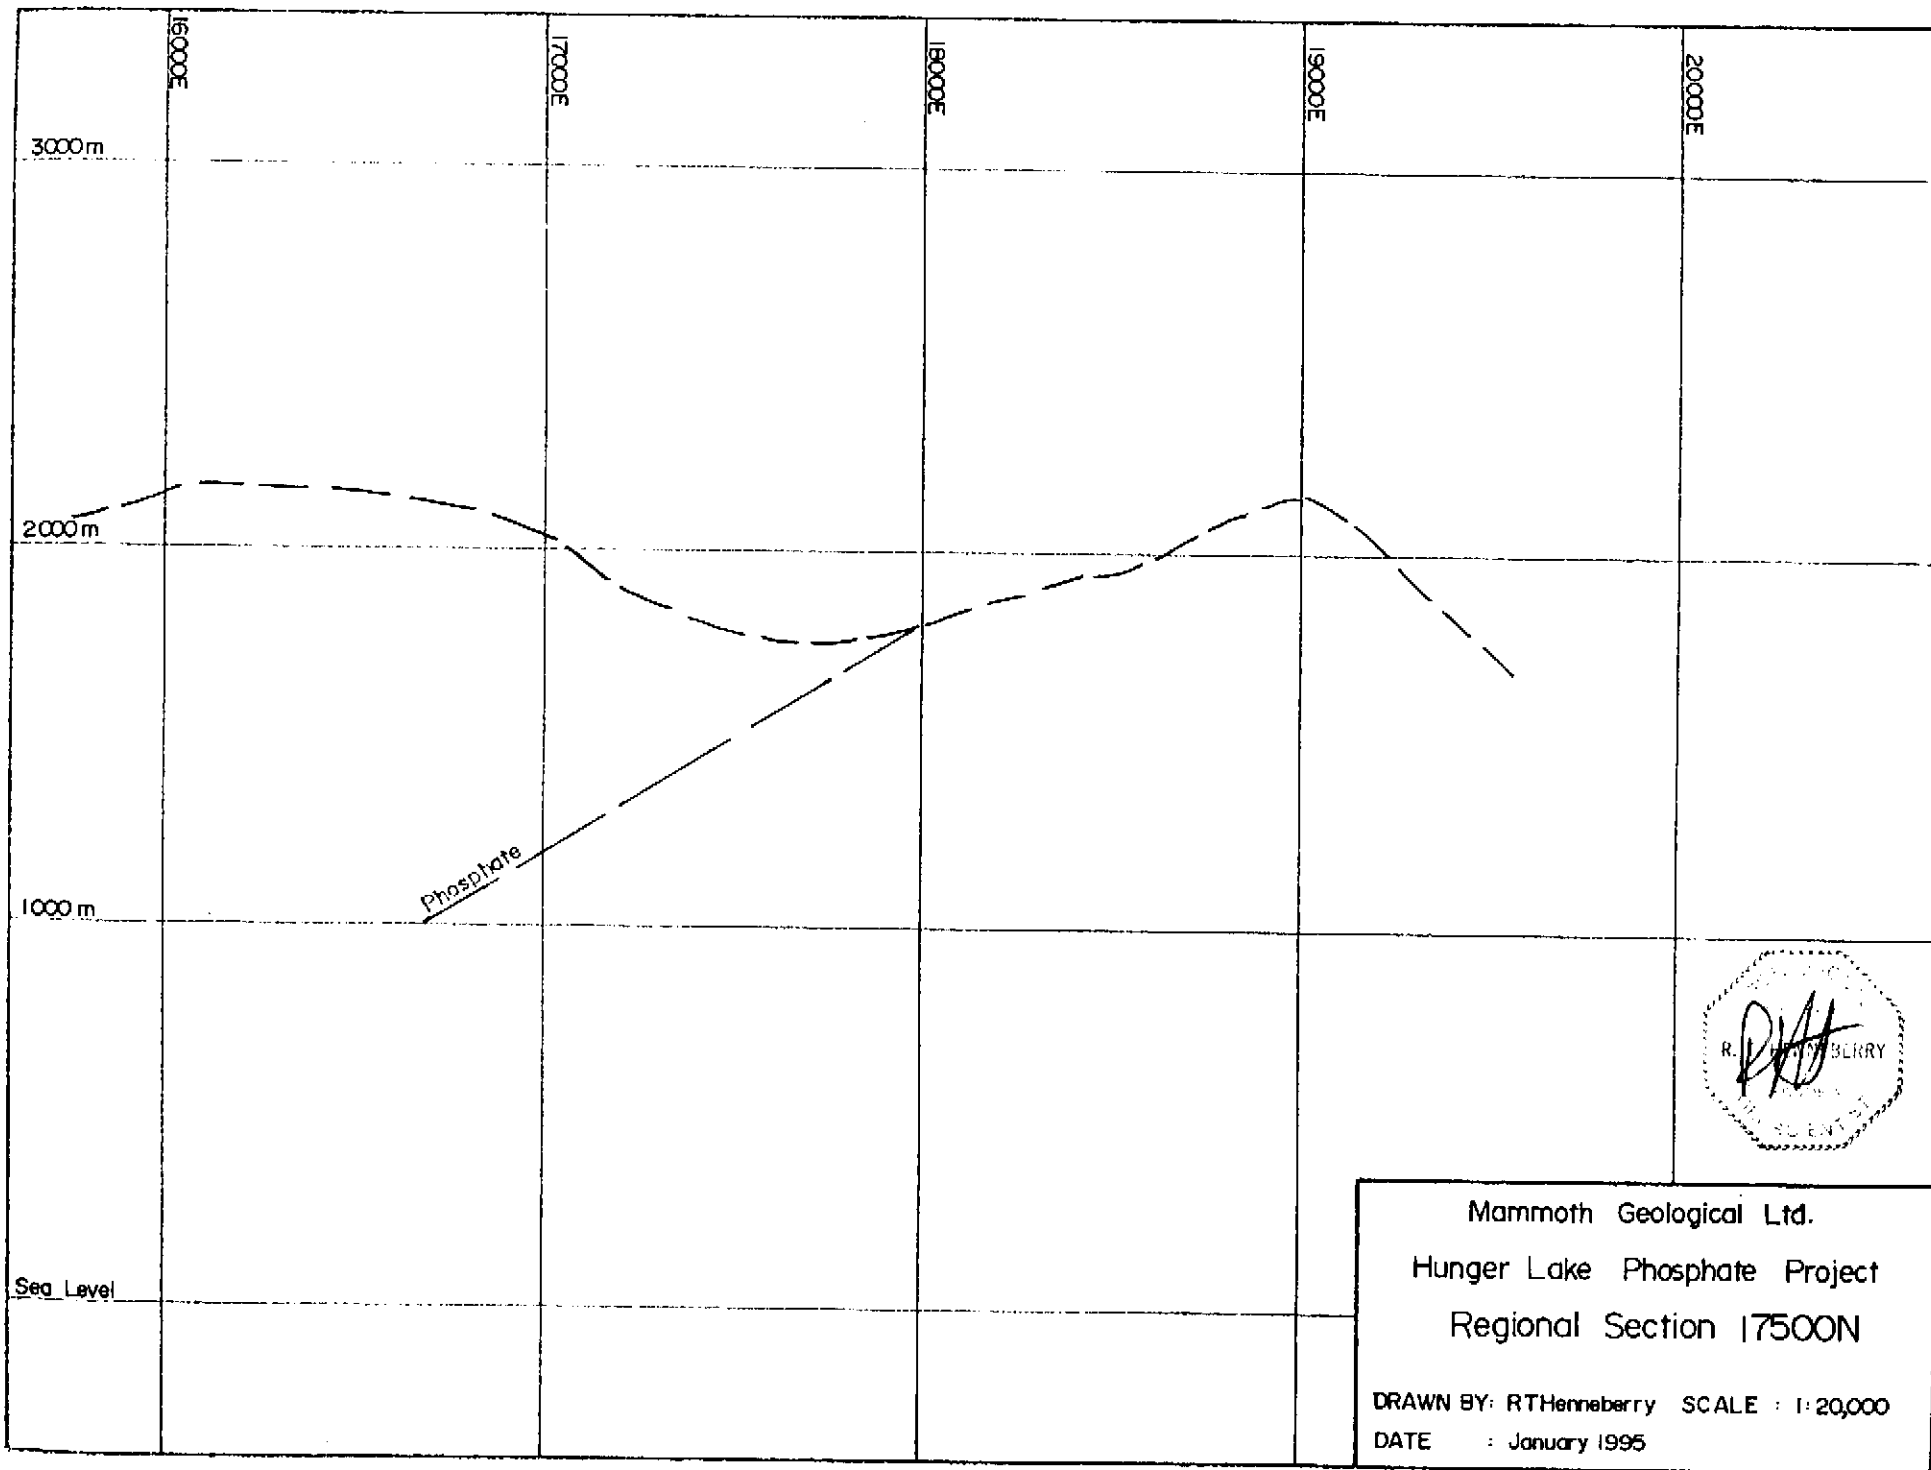



Mammoth Geological Ltd.
 Hunger Lake Phosphate Project
 Regional Section 17500N
 DRAWN BY: RTHenneberry SCALE : 1:20,000
 DATE : January 1995

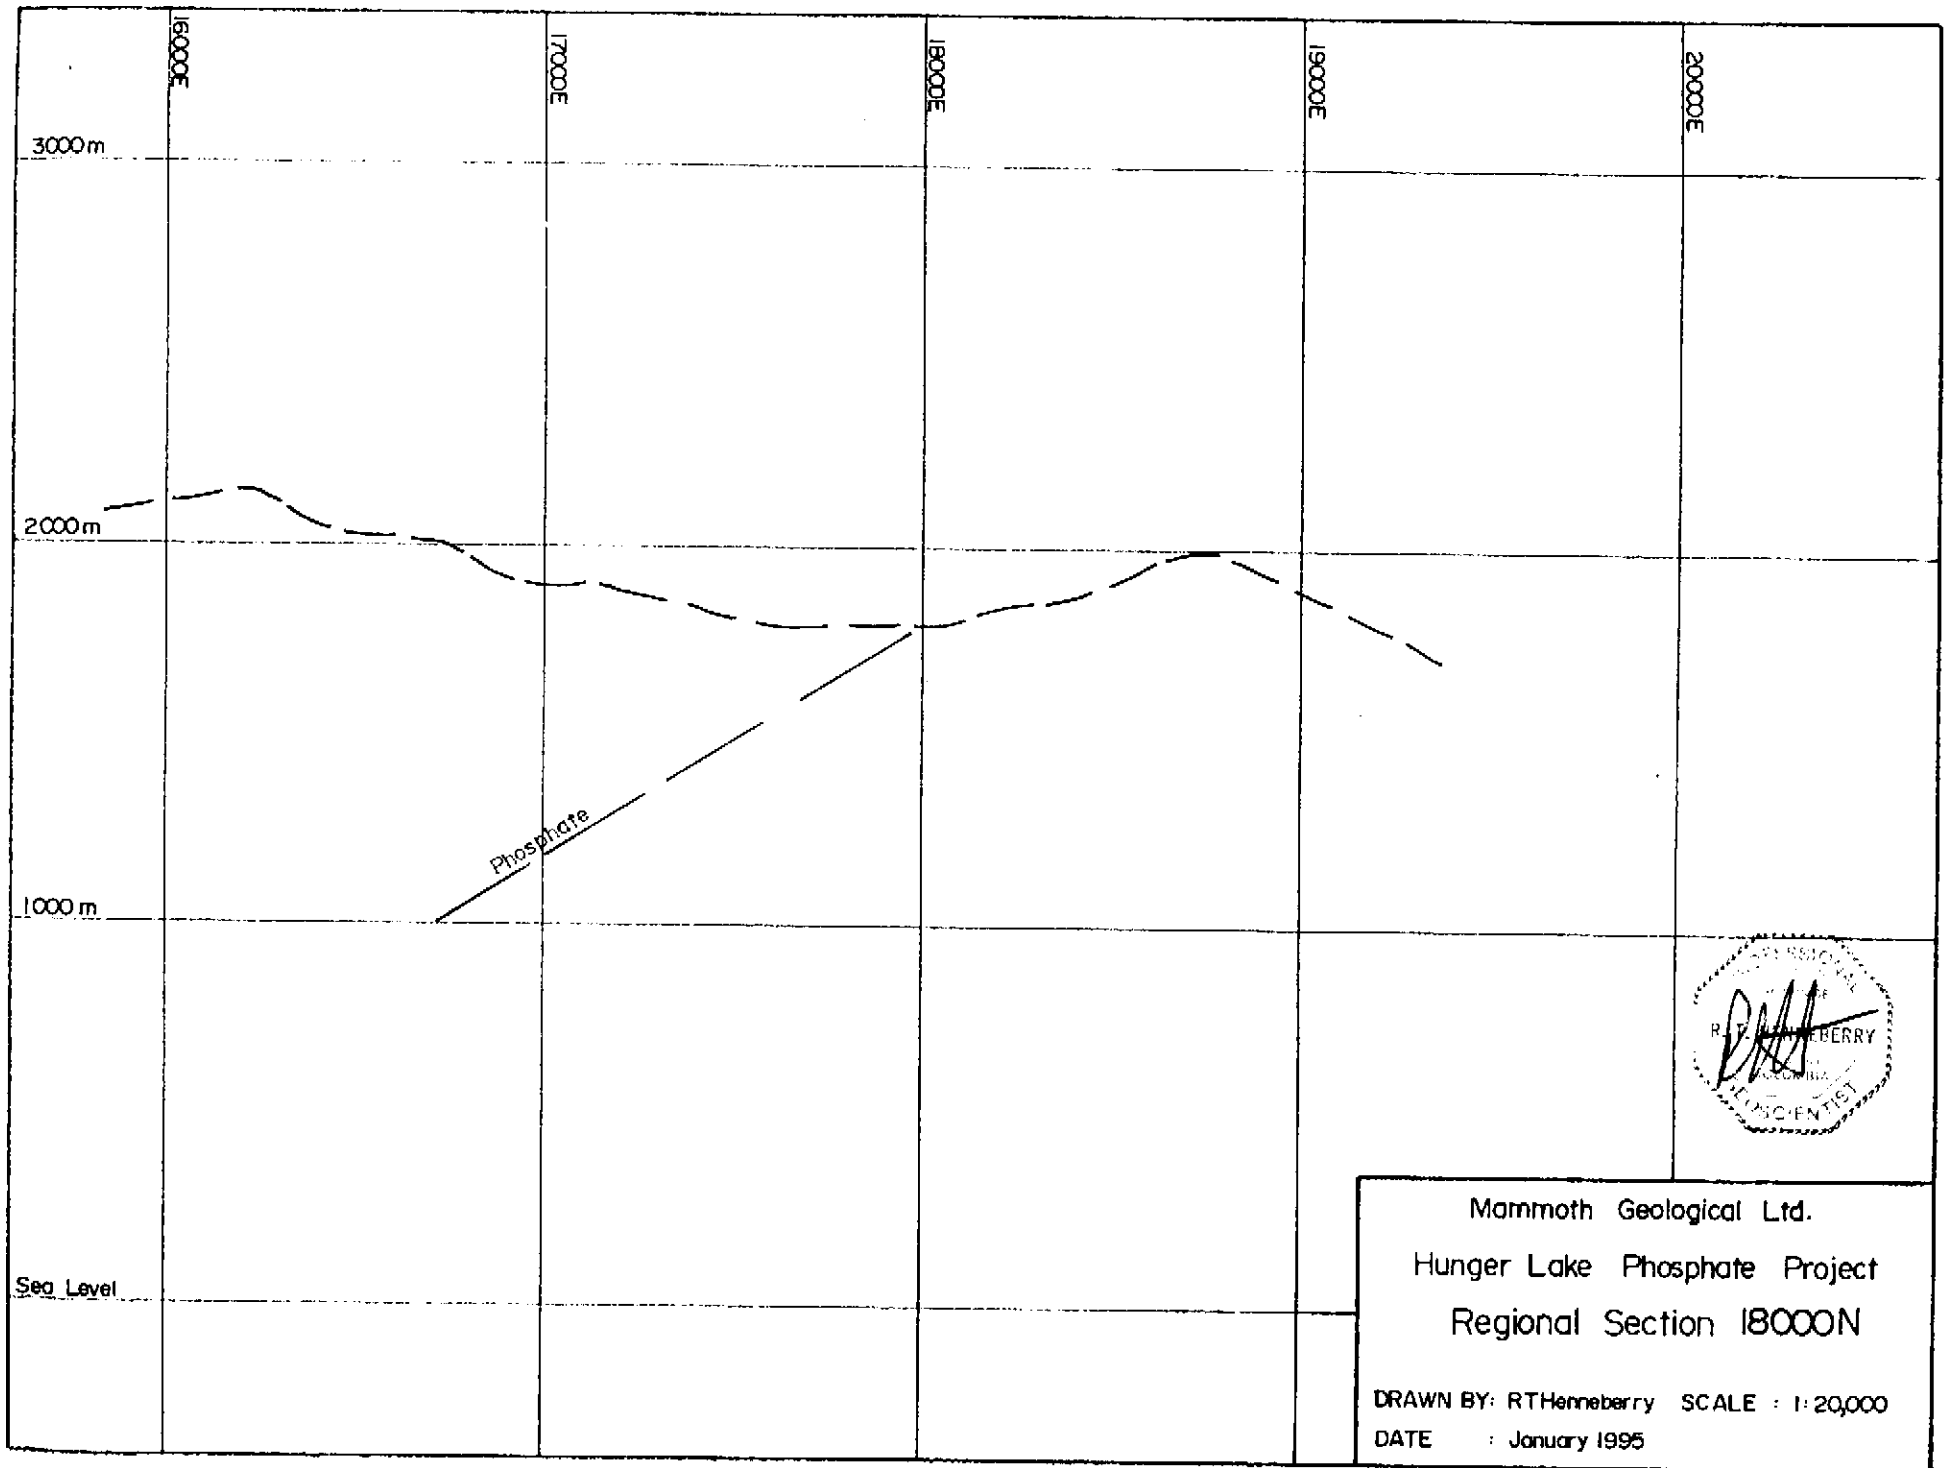

Mammoth Geological Ltd.
 Hunger Lake Phosphate Project
 Regional Section 18000N


DRAWN BY: RTHenneberry SCALE : 1:20,000
 DATE : January 1995




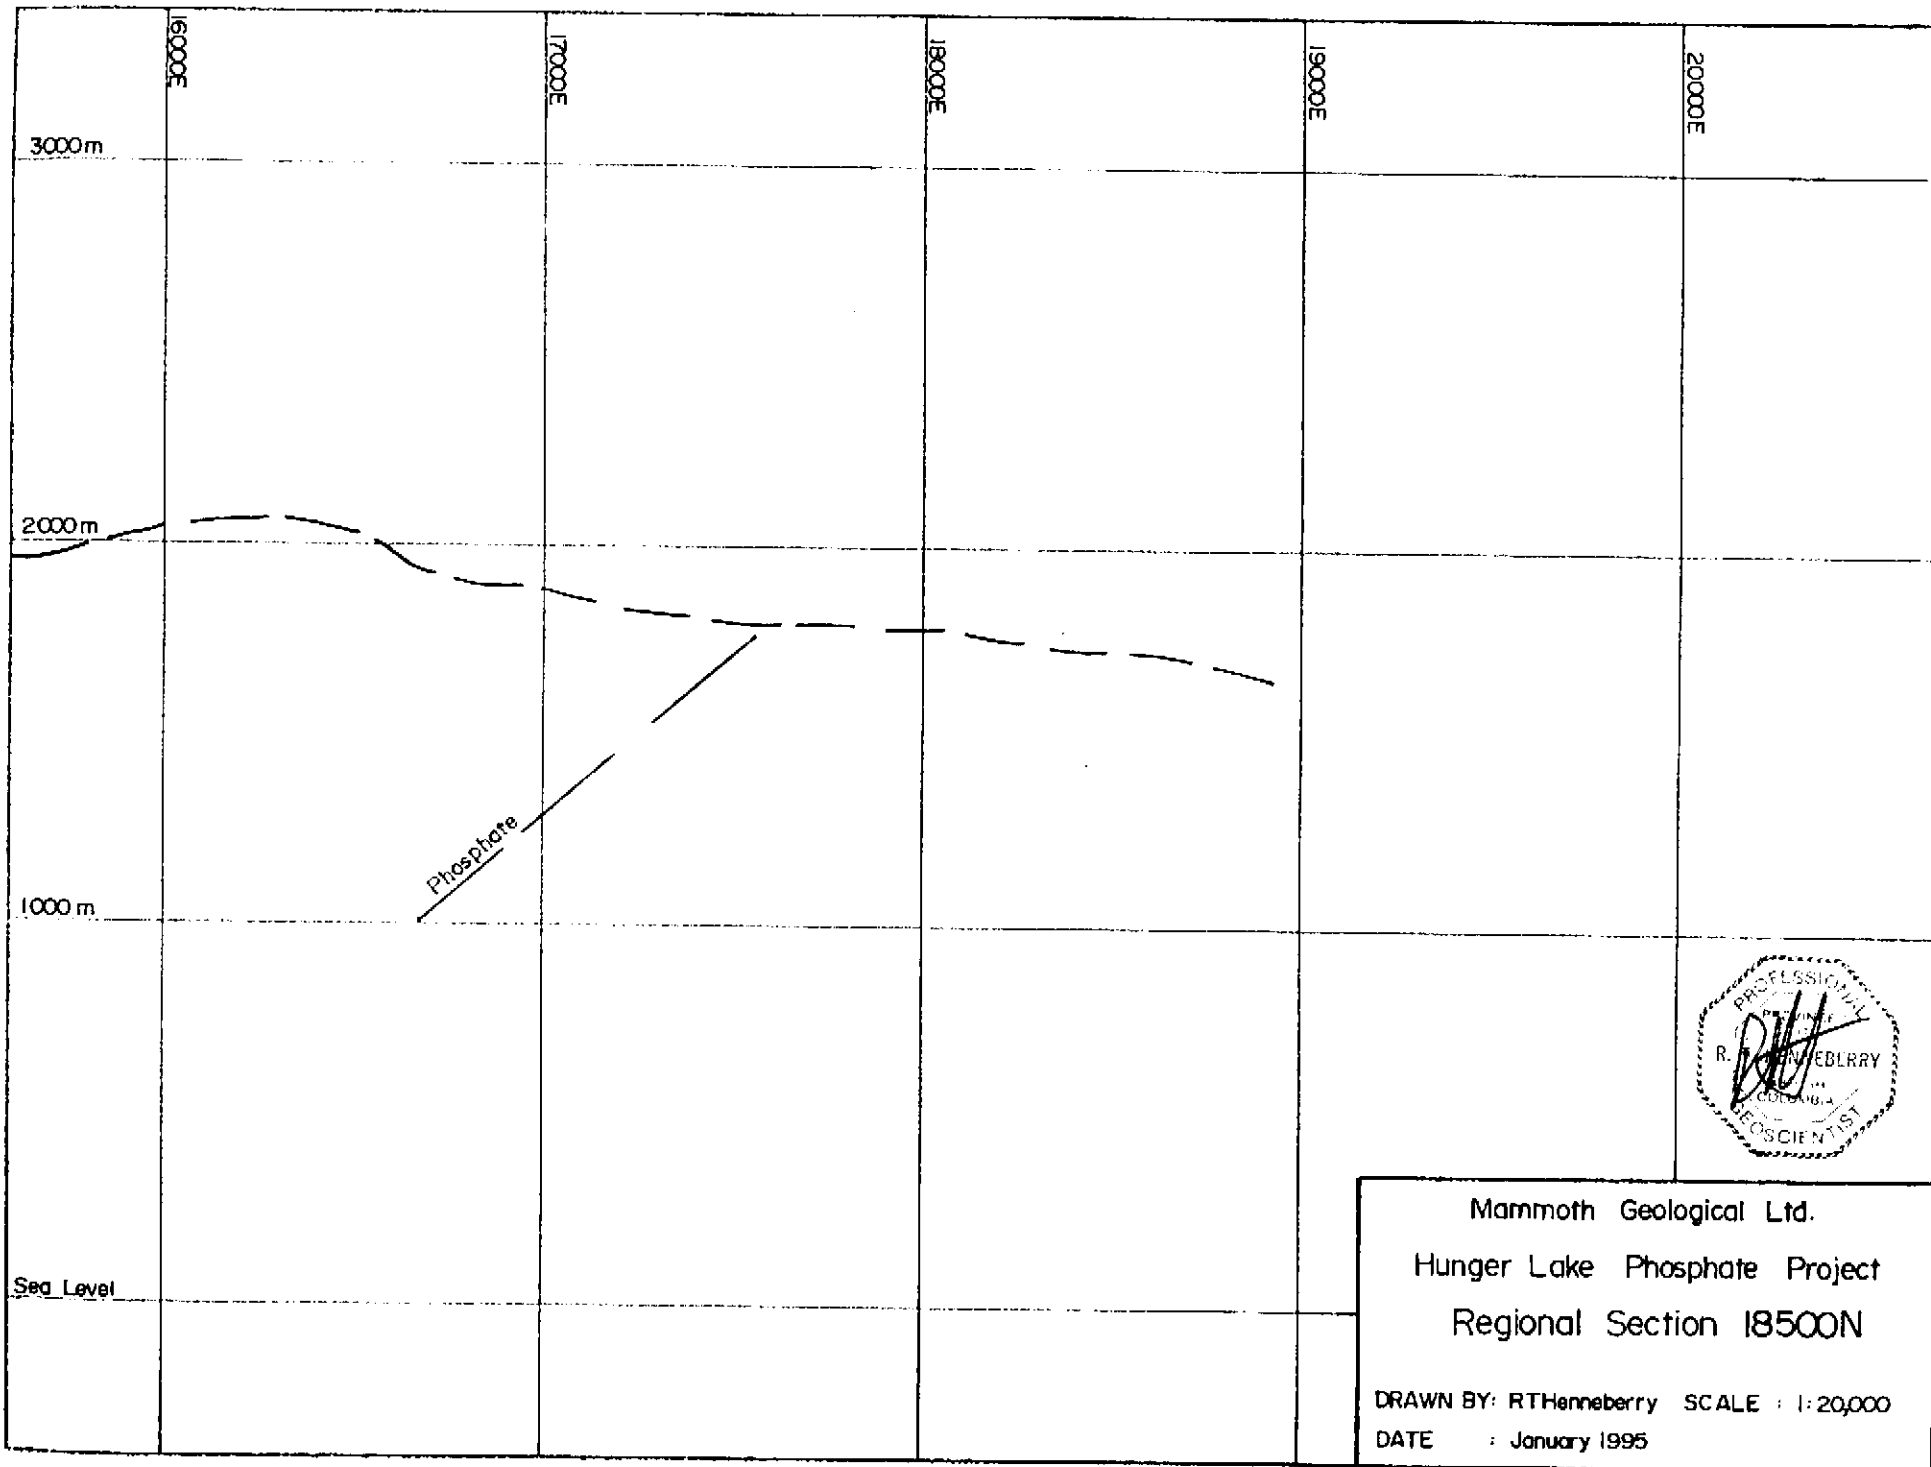

Mammoth Geological Ltd.
 Hunger Lake Phosphate Project
 Regional Section 18500N


DRAWN BY: RHerneberry SCALE : 1:20,000
 DATE : January 1995

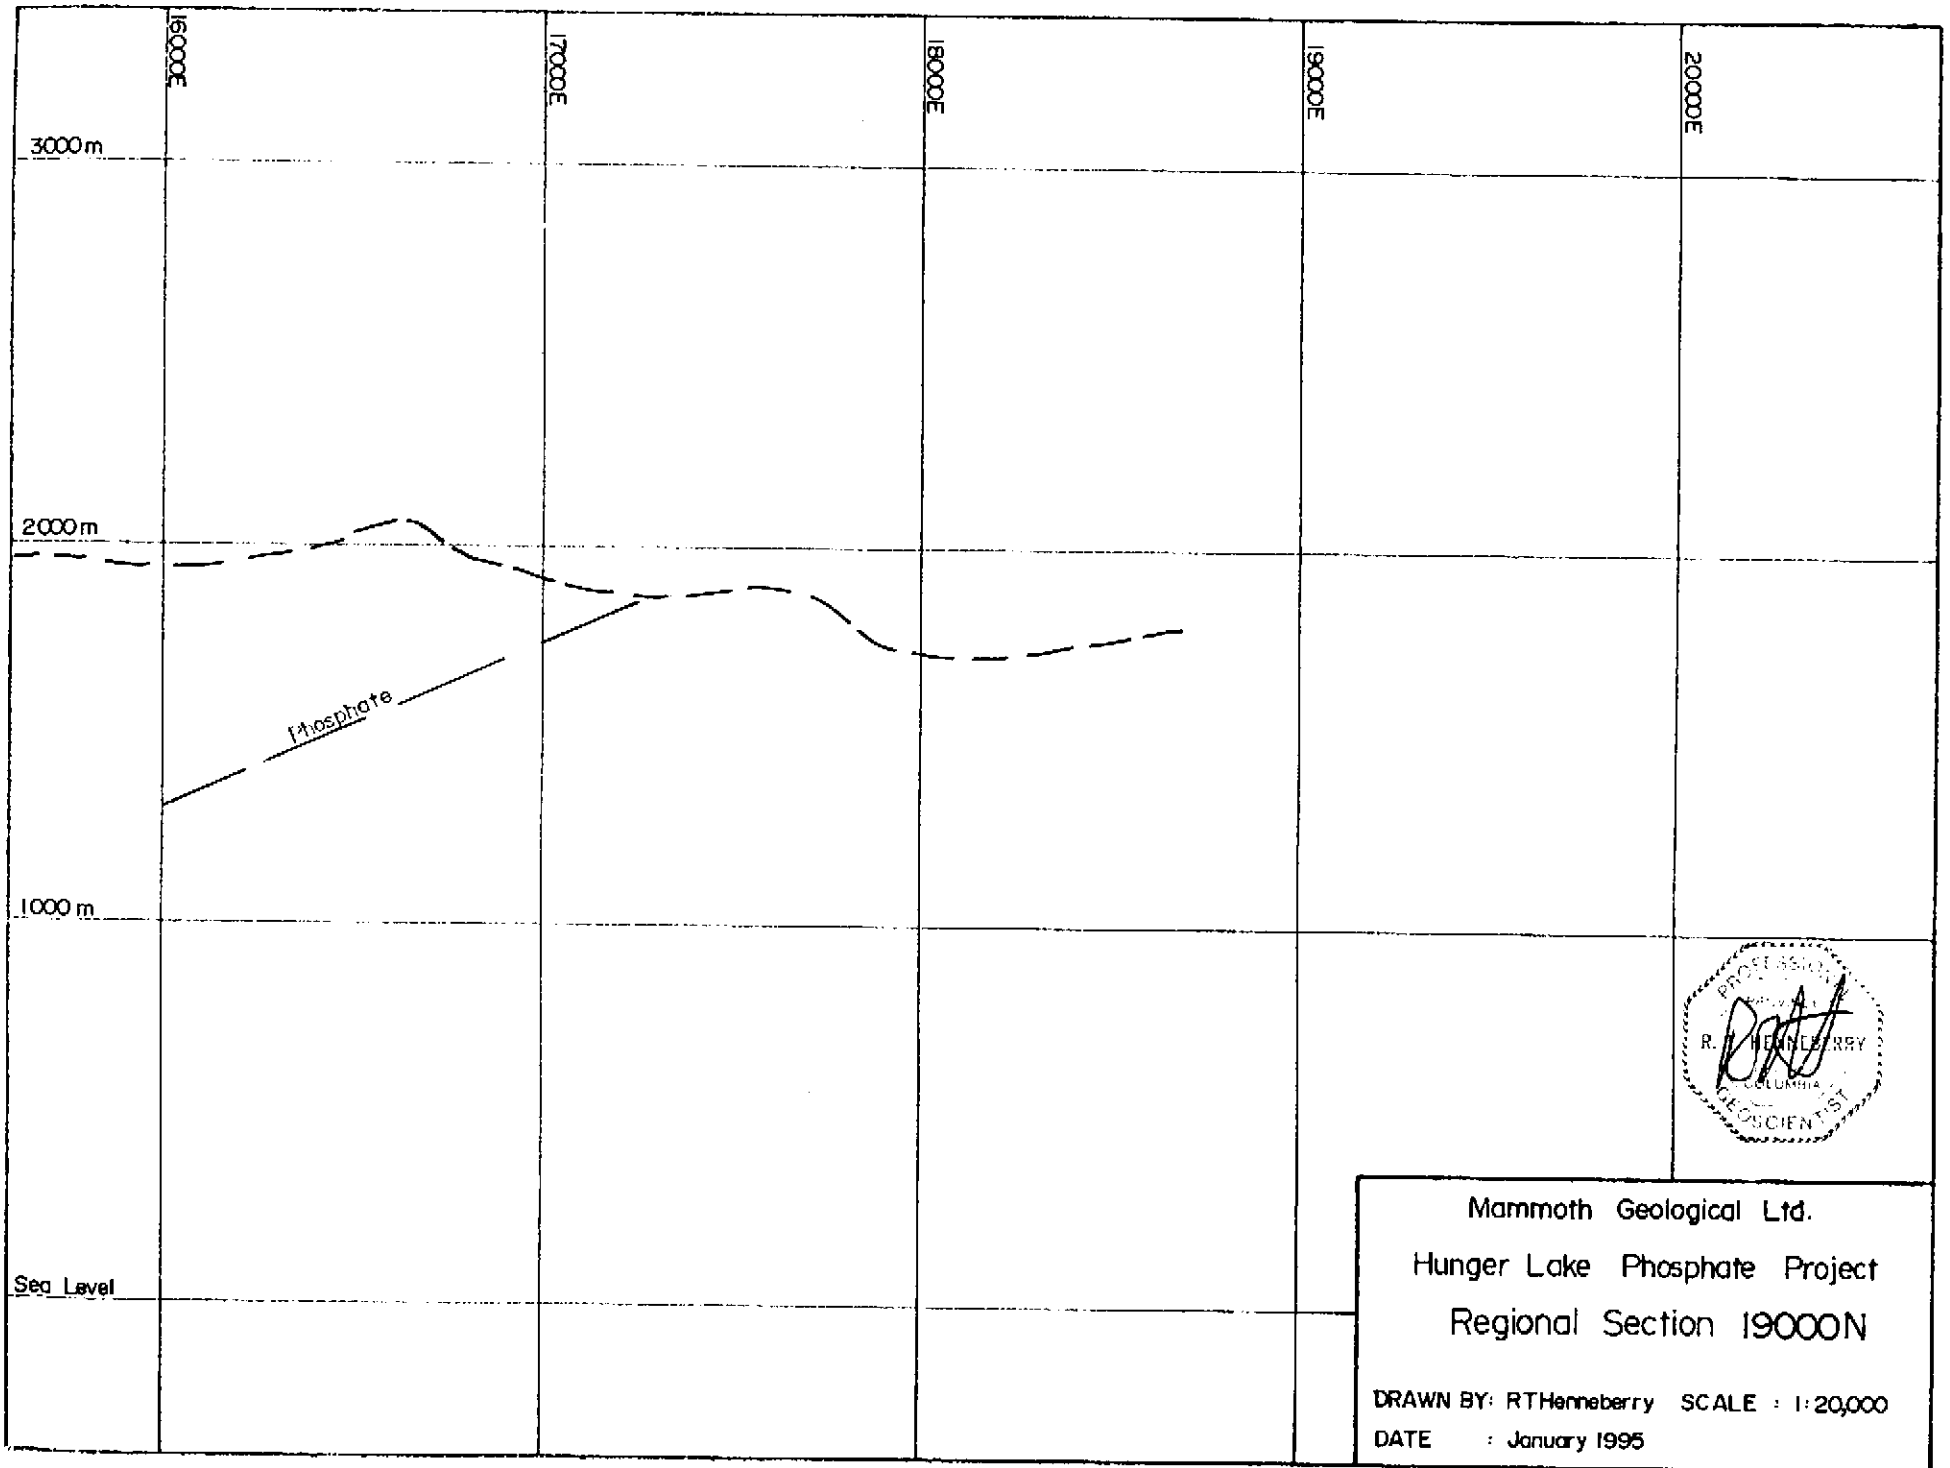

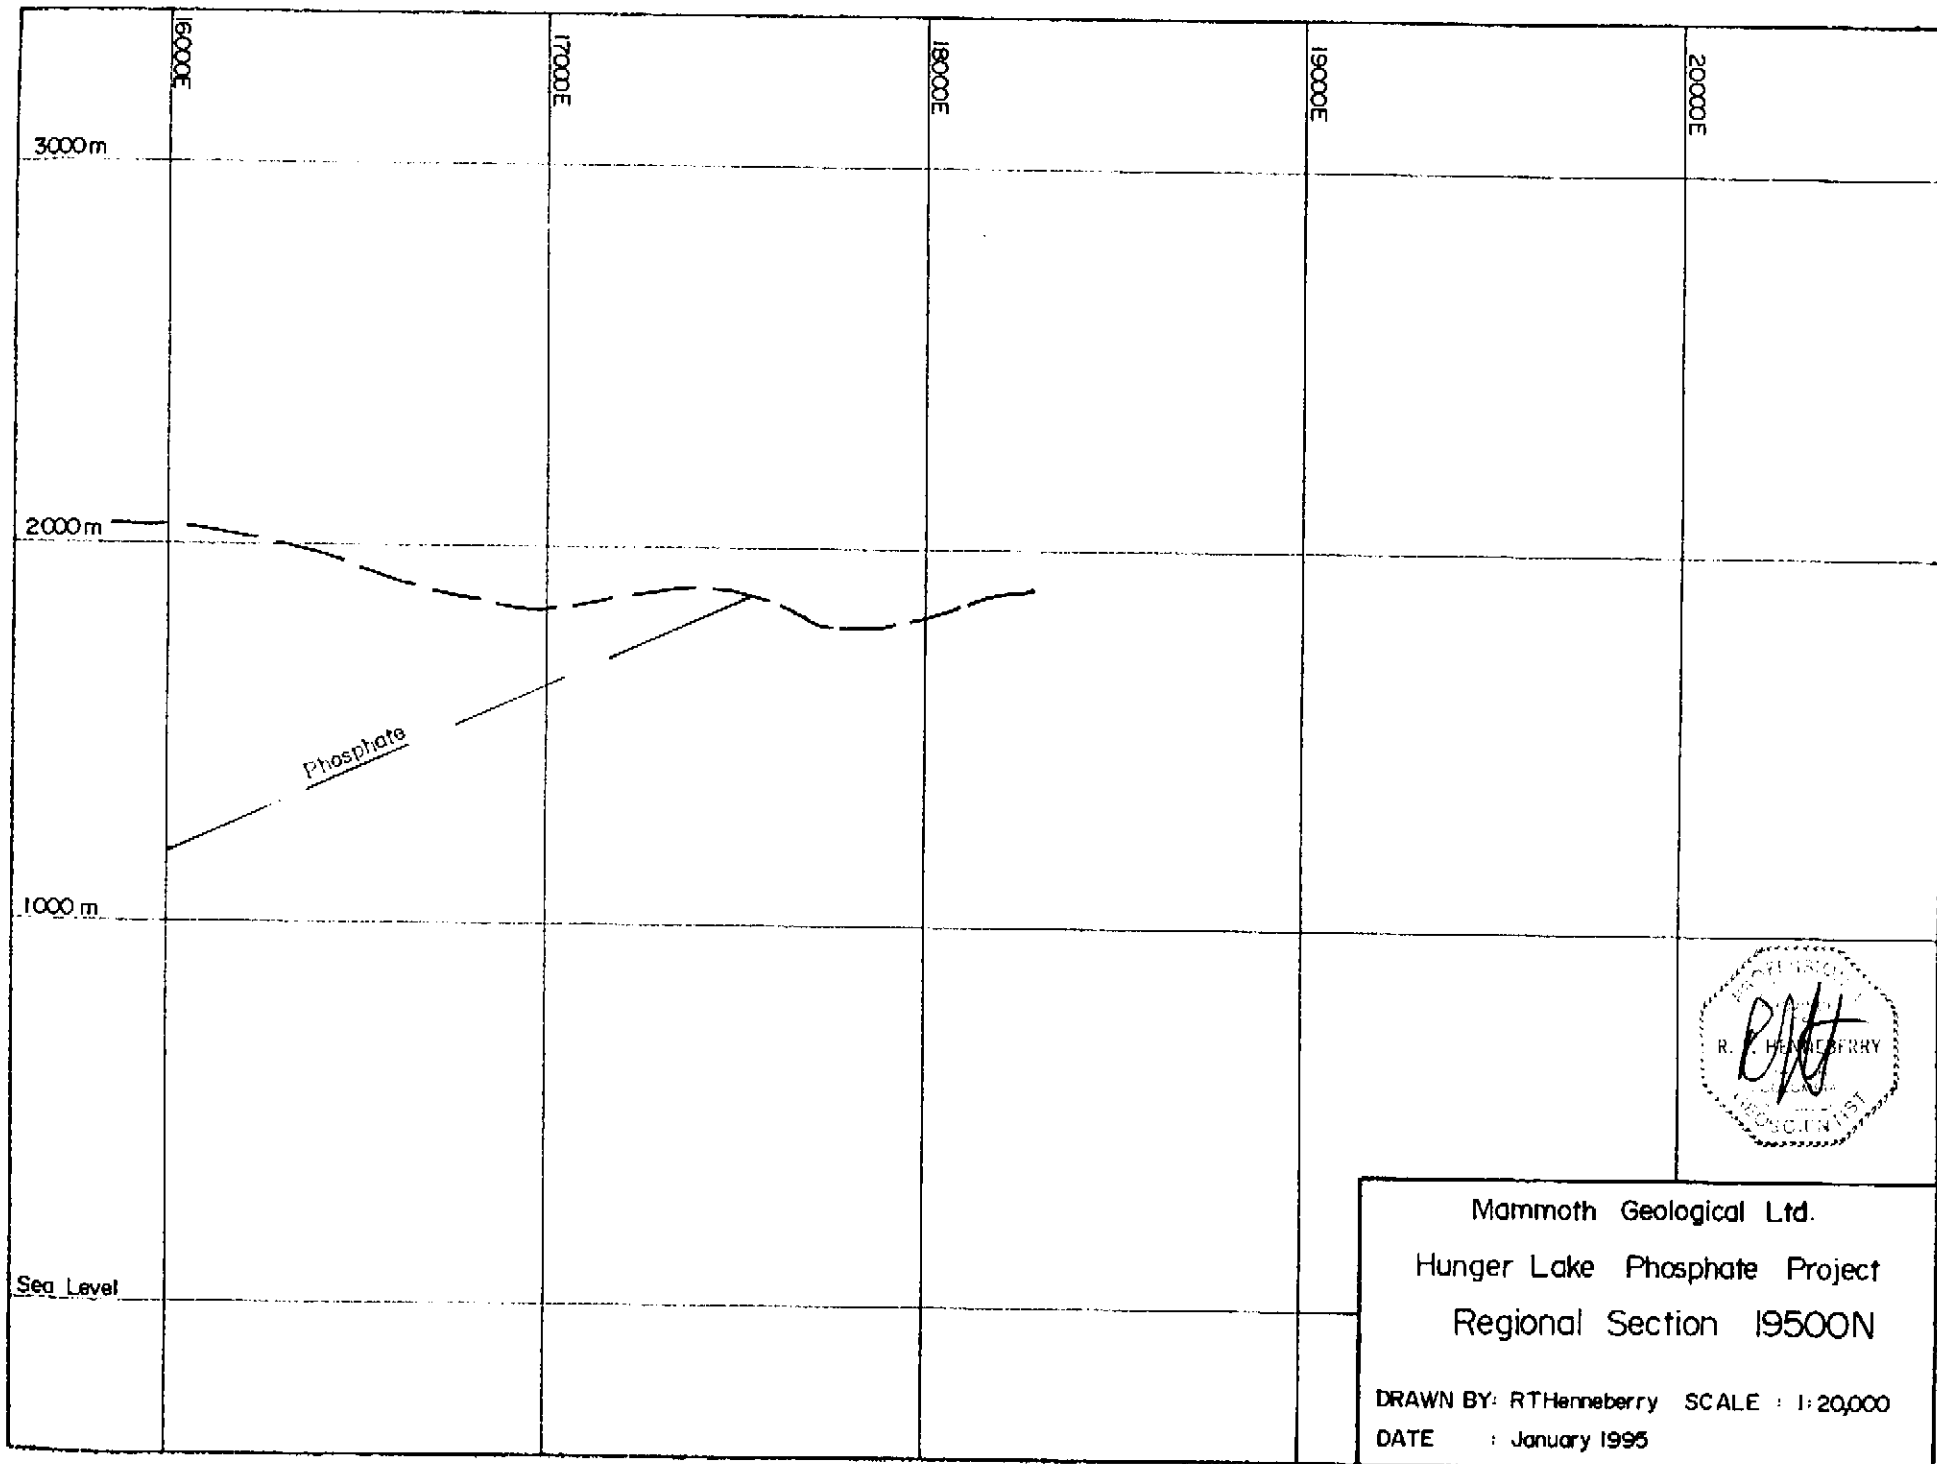

Mammoth Geological Ltd.
 Hunger Lake Phosphate Project
 Regional Section 19500N

DRAWN BY: RTHenneberry SCALE : 1:20,000
 DATE : January 1995

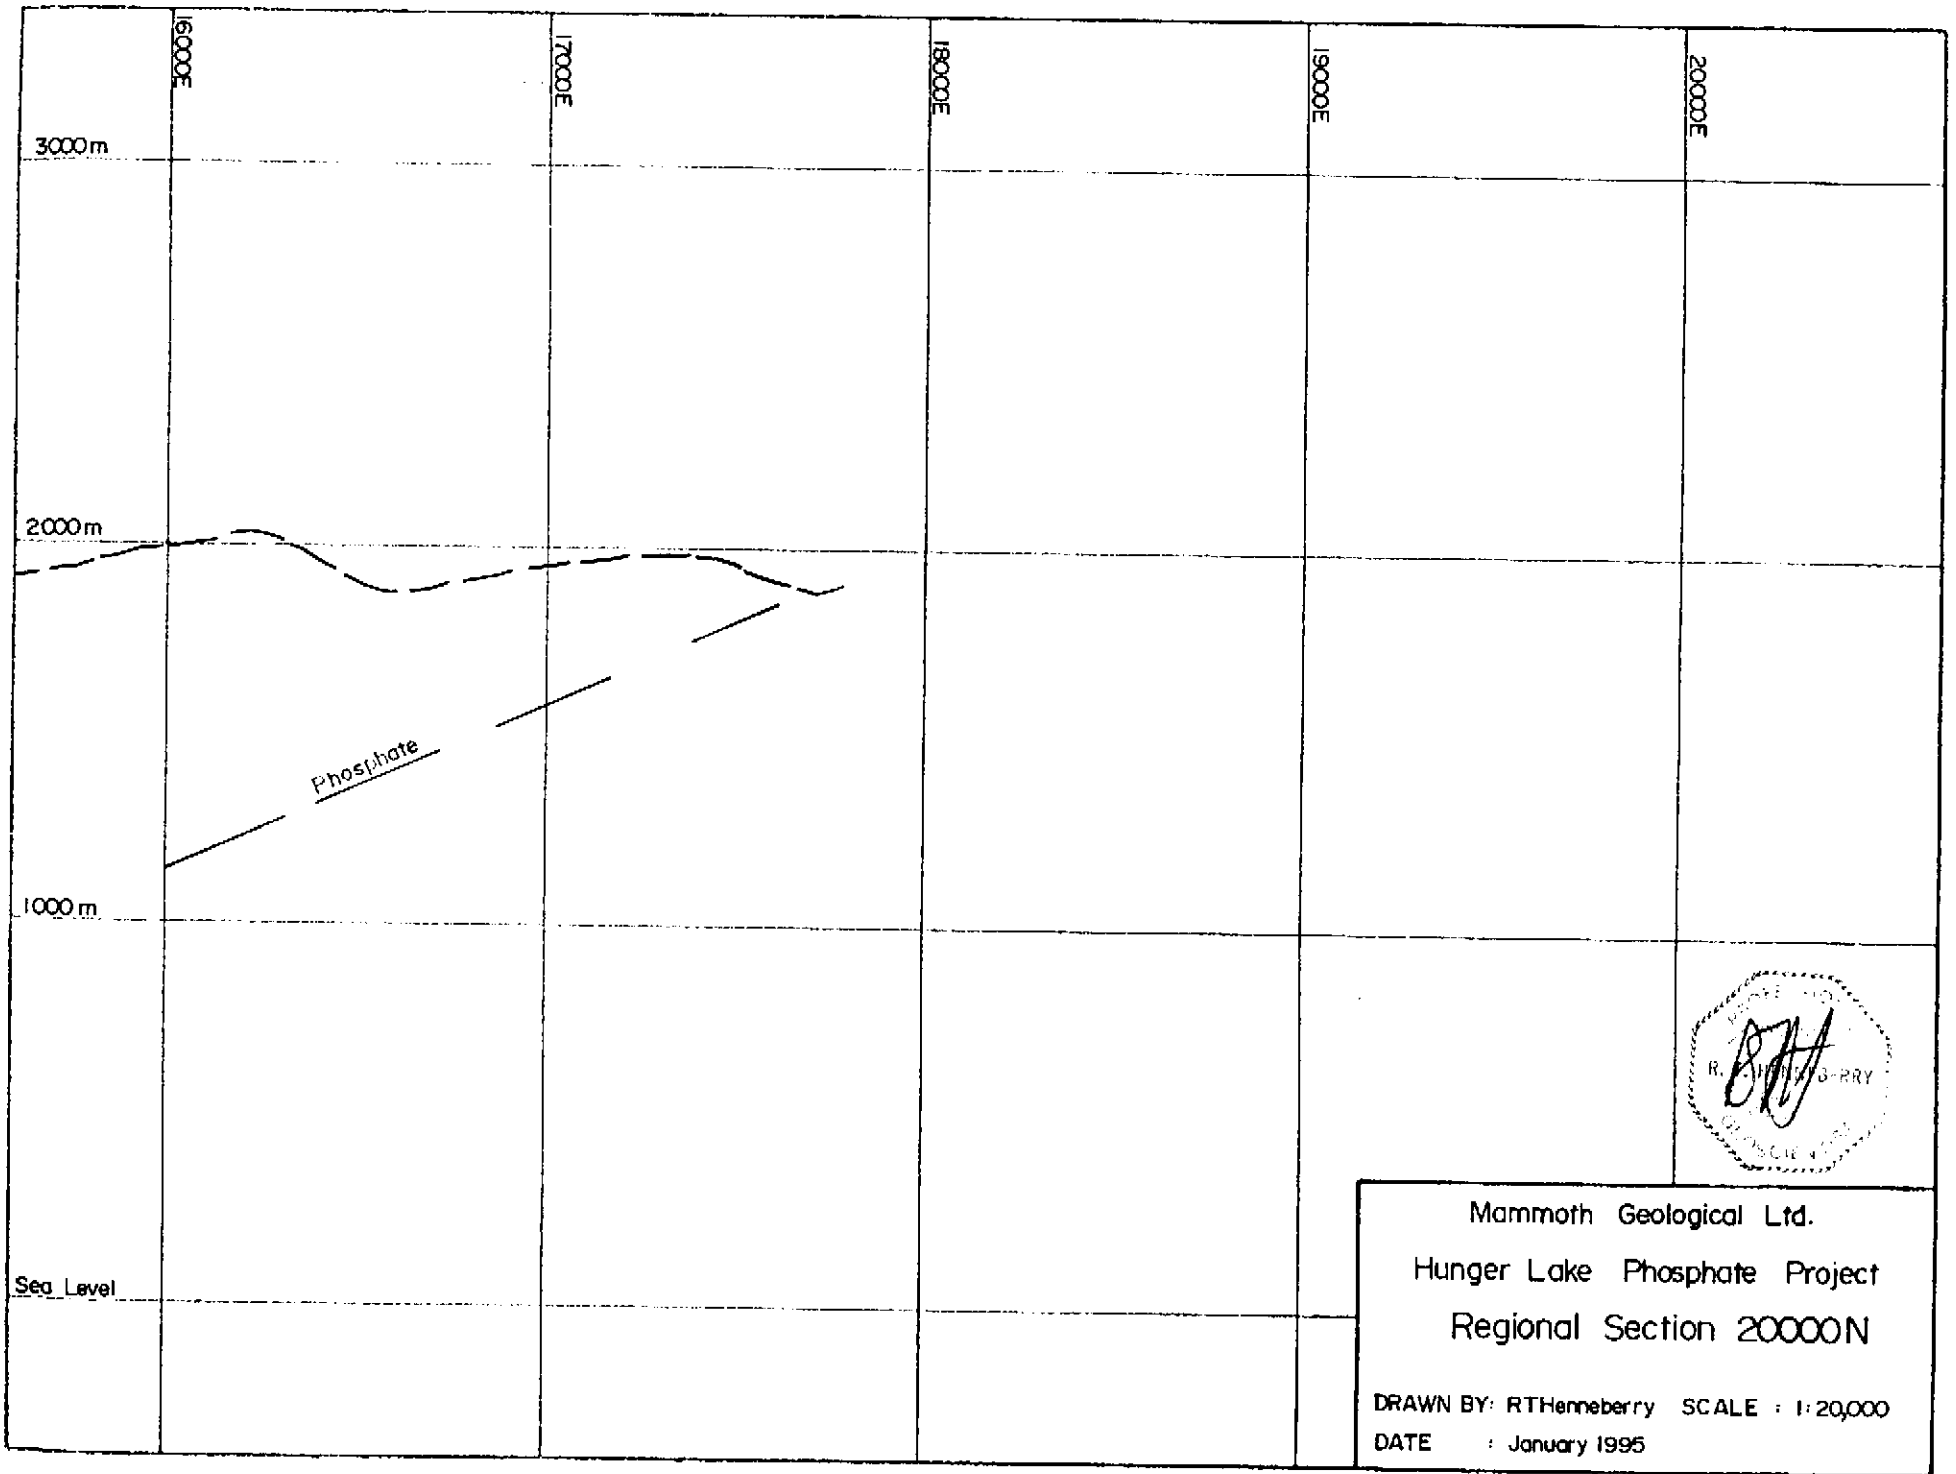


Mammoth Geological Ltd.
 Hunger Lake Phosphate Project
 Regional Section 20000N

DRAWN BY: RTHenneberry SCALE : 1:20,000
 DATE : January 1995

DOM. GOVT
BLOCK.

BARNES 211906
BARNES 211907
BARNES 211908
BARNES 211909
BARNES 211910

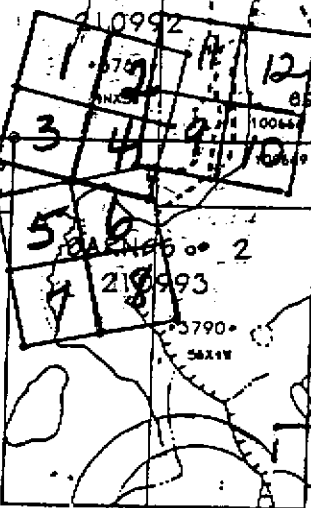

CENTER 2 316701
CENTER 1 316700
CENTER 4 316704
CENTER 3 316703
CENTER 5 316702
CENTER 6 316705
CENTER 7 316706
CENTER 8 316707
CENTER 9 316708
CENTER 10 316709
CENTER 11 316710
CENTER 12 316711

Location sketch
BLG 07E
July 16/1996
BL #1-12 L 7291

0337 MINERAL RESERVE
C/O 2247/2277/76
SUBJECT TO CONDITIONS

LOCATOR'S SKETCH STAMP
(SUB) RECORDER'S INFORMATION

CLAIM NAMES: BL #1-12

RECORD NUMBERS: 348582-348593

MINING DIVISION: FORT STEELE


MAP NUMBER: B2 G 7E

MINERAL TITLES BRANCH
DRAFTING INFORMATION

DATE COMPLETED: _____

INITIALS: _____



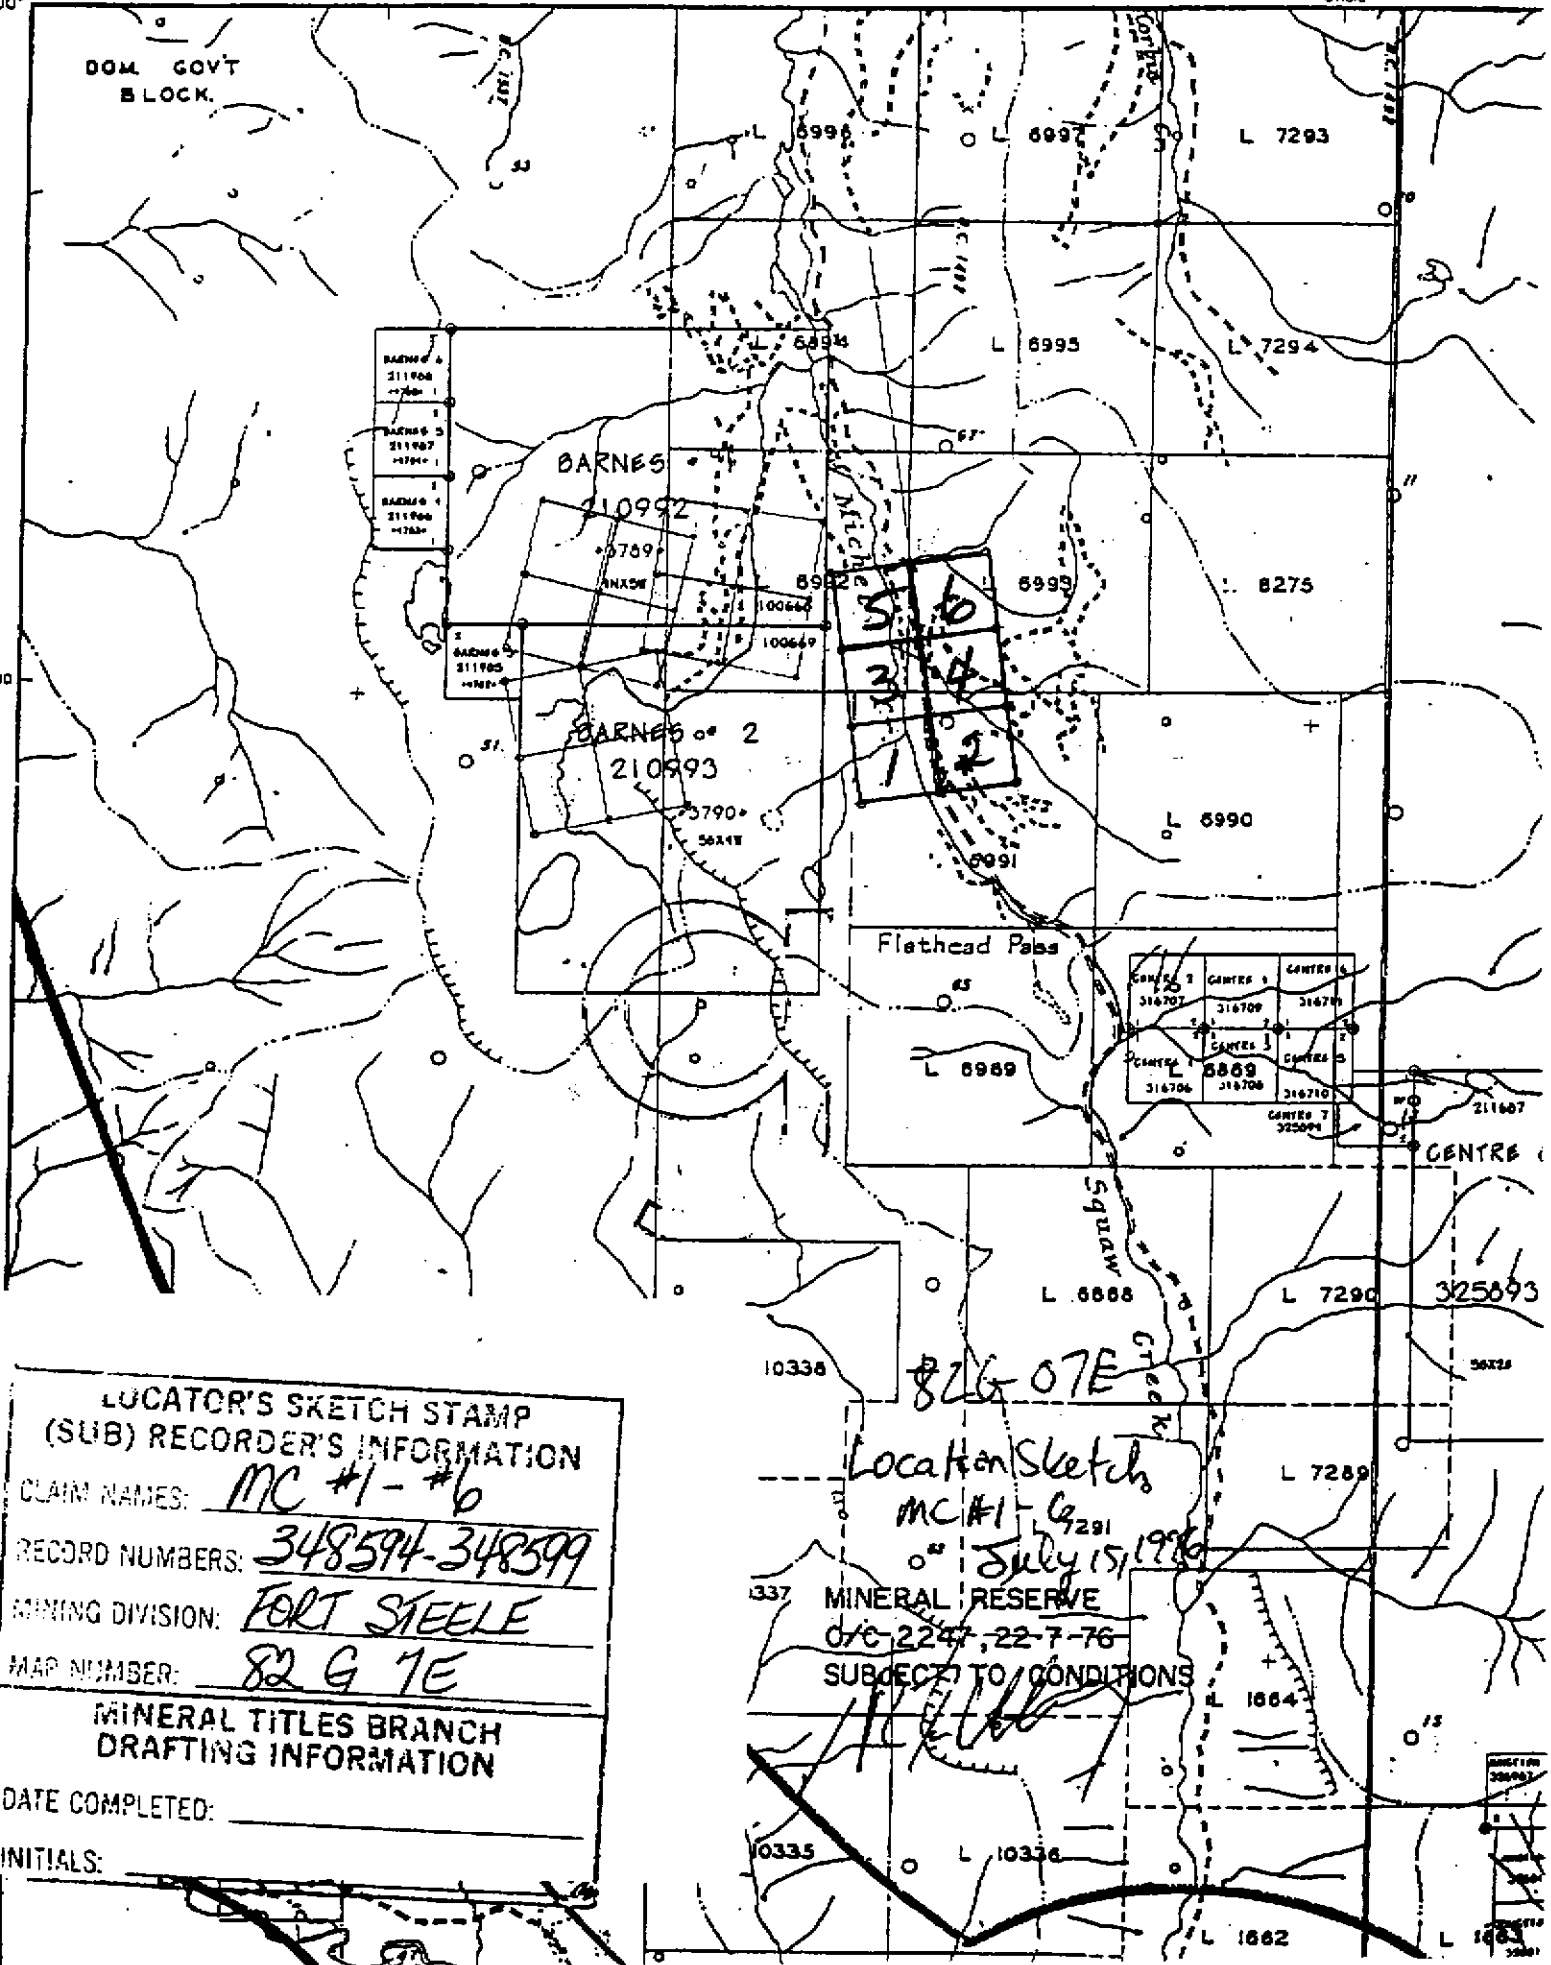

LOCATOR'S SKETCH STAMP
(SUB) RECORDER'S INFORMATION

CLAIM NAMES: MC #1 - #6

RECORD NUMBERS: 348594-348599

MINING DIVISION: FORT STEELE

MAP NUMBER: 82 G 7E

MINERAL TITLES BRANCH
DRAFTING INFORMATION

DATE COMPLETED: _____


INITIALS: _____

82G 07E

Location Sketch
MC #1 - G₂₉₁
July 15, 1976

MINERAL RESERVE
 O/C-2247-22-7-76
 SUBJECT TO CONDITIONS

[Signature]

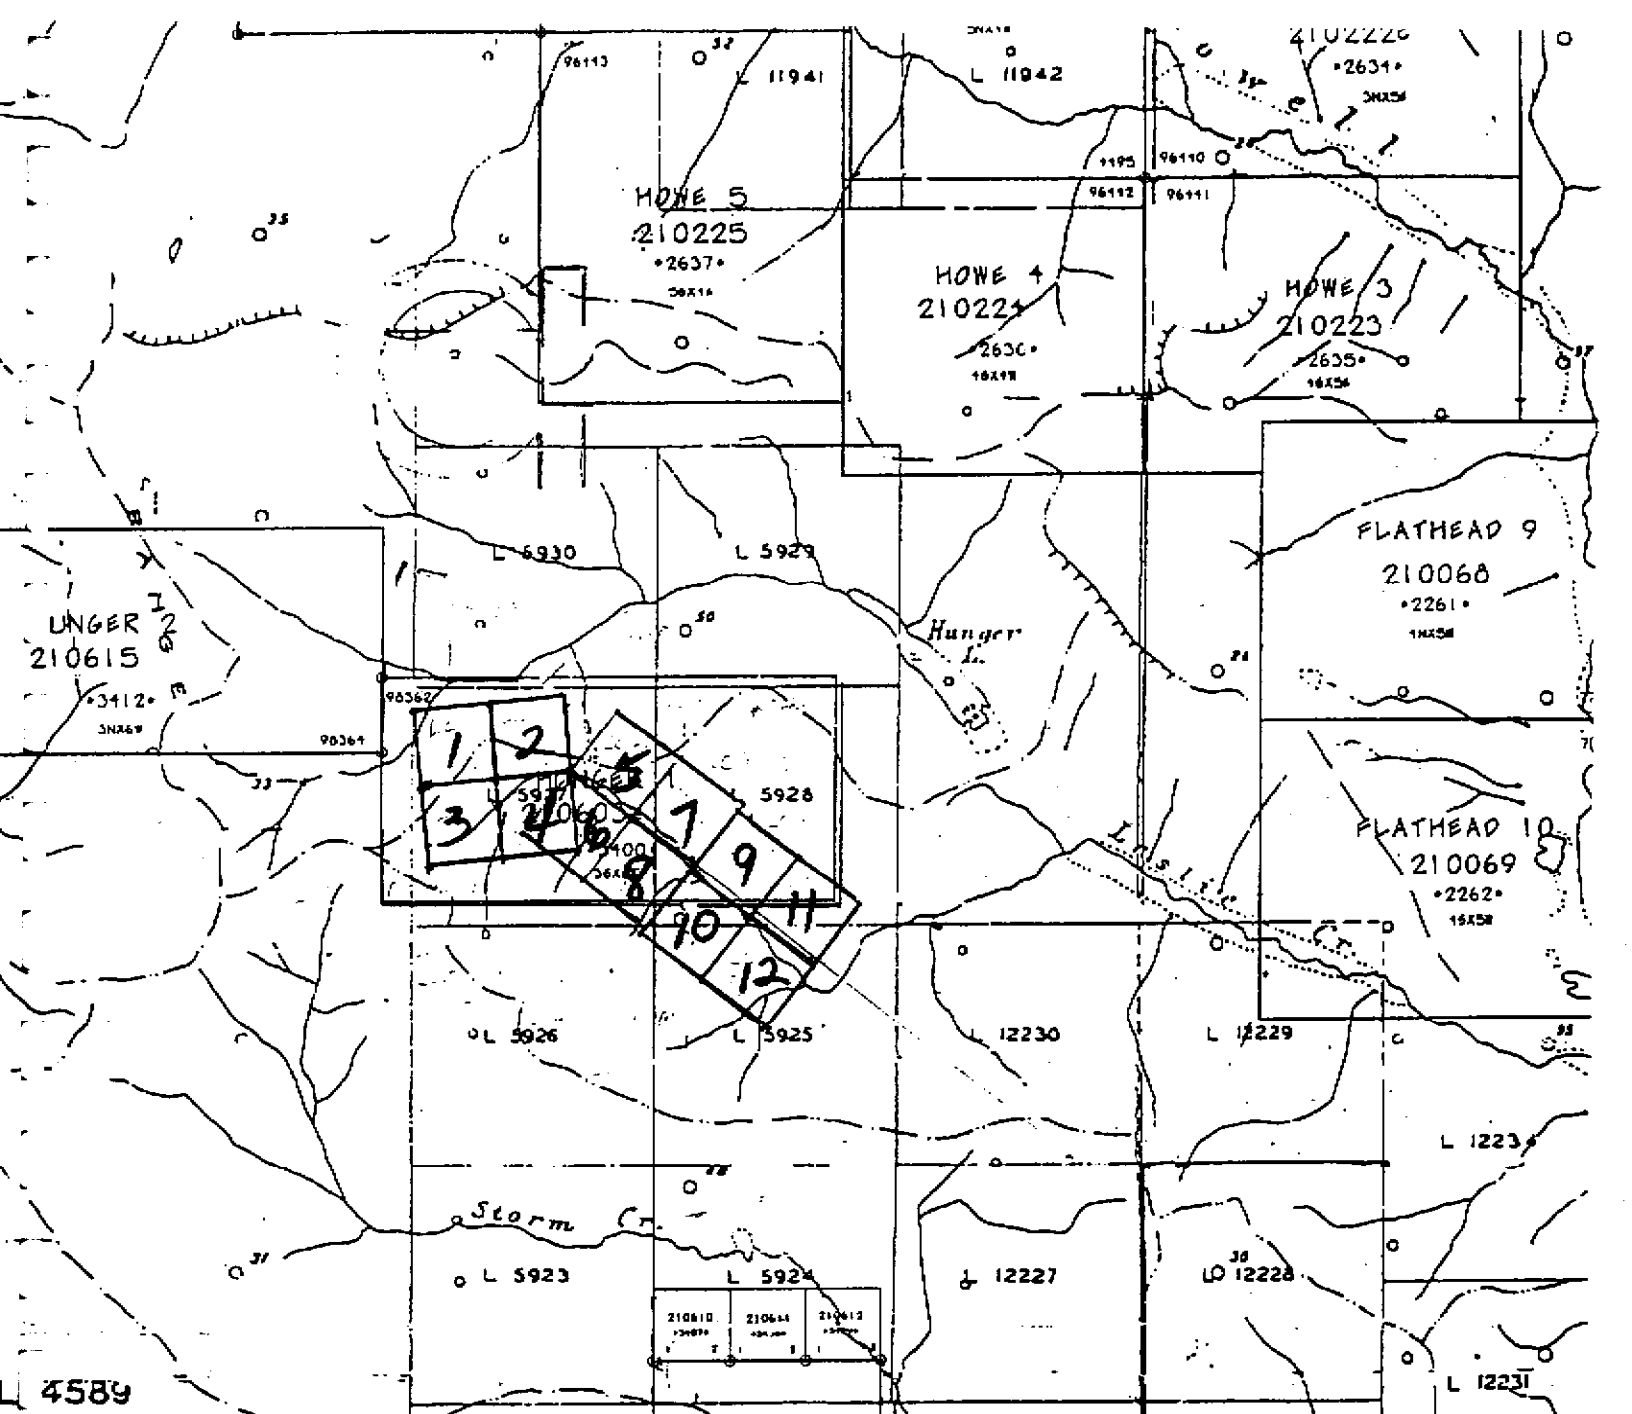

LOCATOR'S SKETCH STAMP
(SUB) RECORDER'S INFORMATION

CLAIM NAMES: LC #1 - #12

RECORD NUMBERS: 348616-348627


MINING DIVISION: FORT STEELE


MAP NUMBER: 82 G 2 E

MINERAL TITLES BRANCH
DRAFTING INFORMATION

DATE COMPLETED: _____

INITIALS: _____

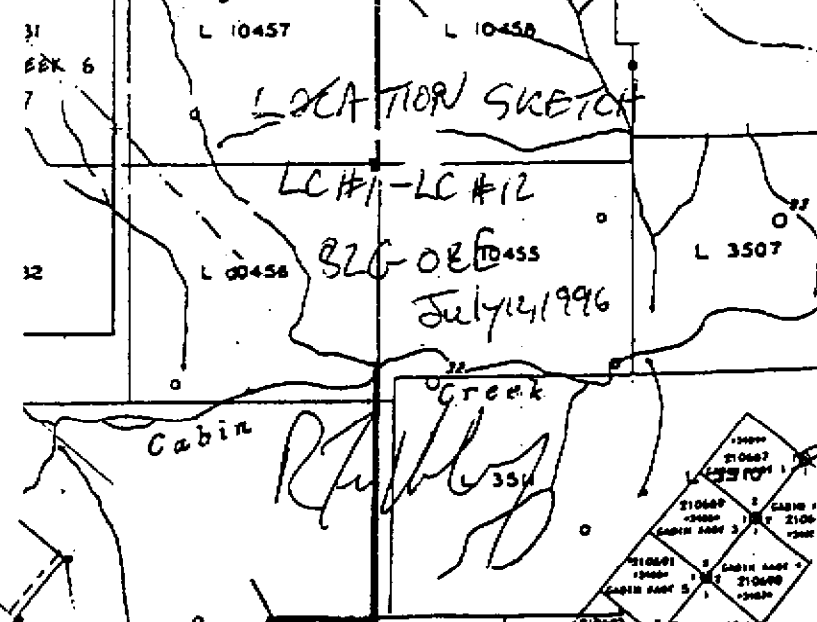

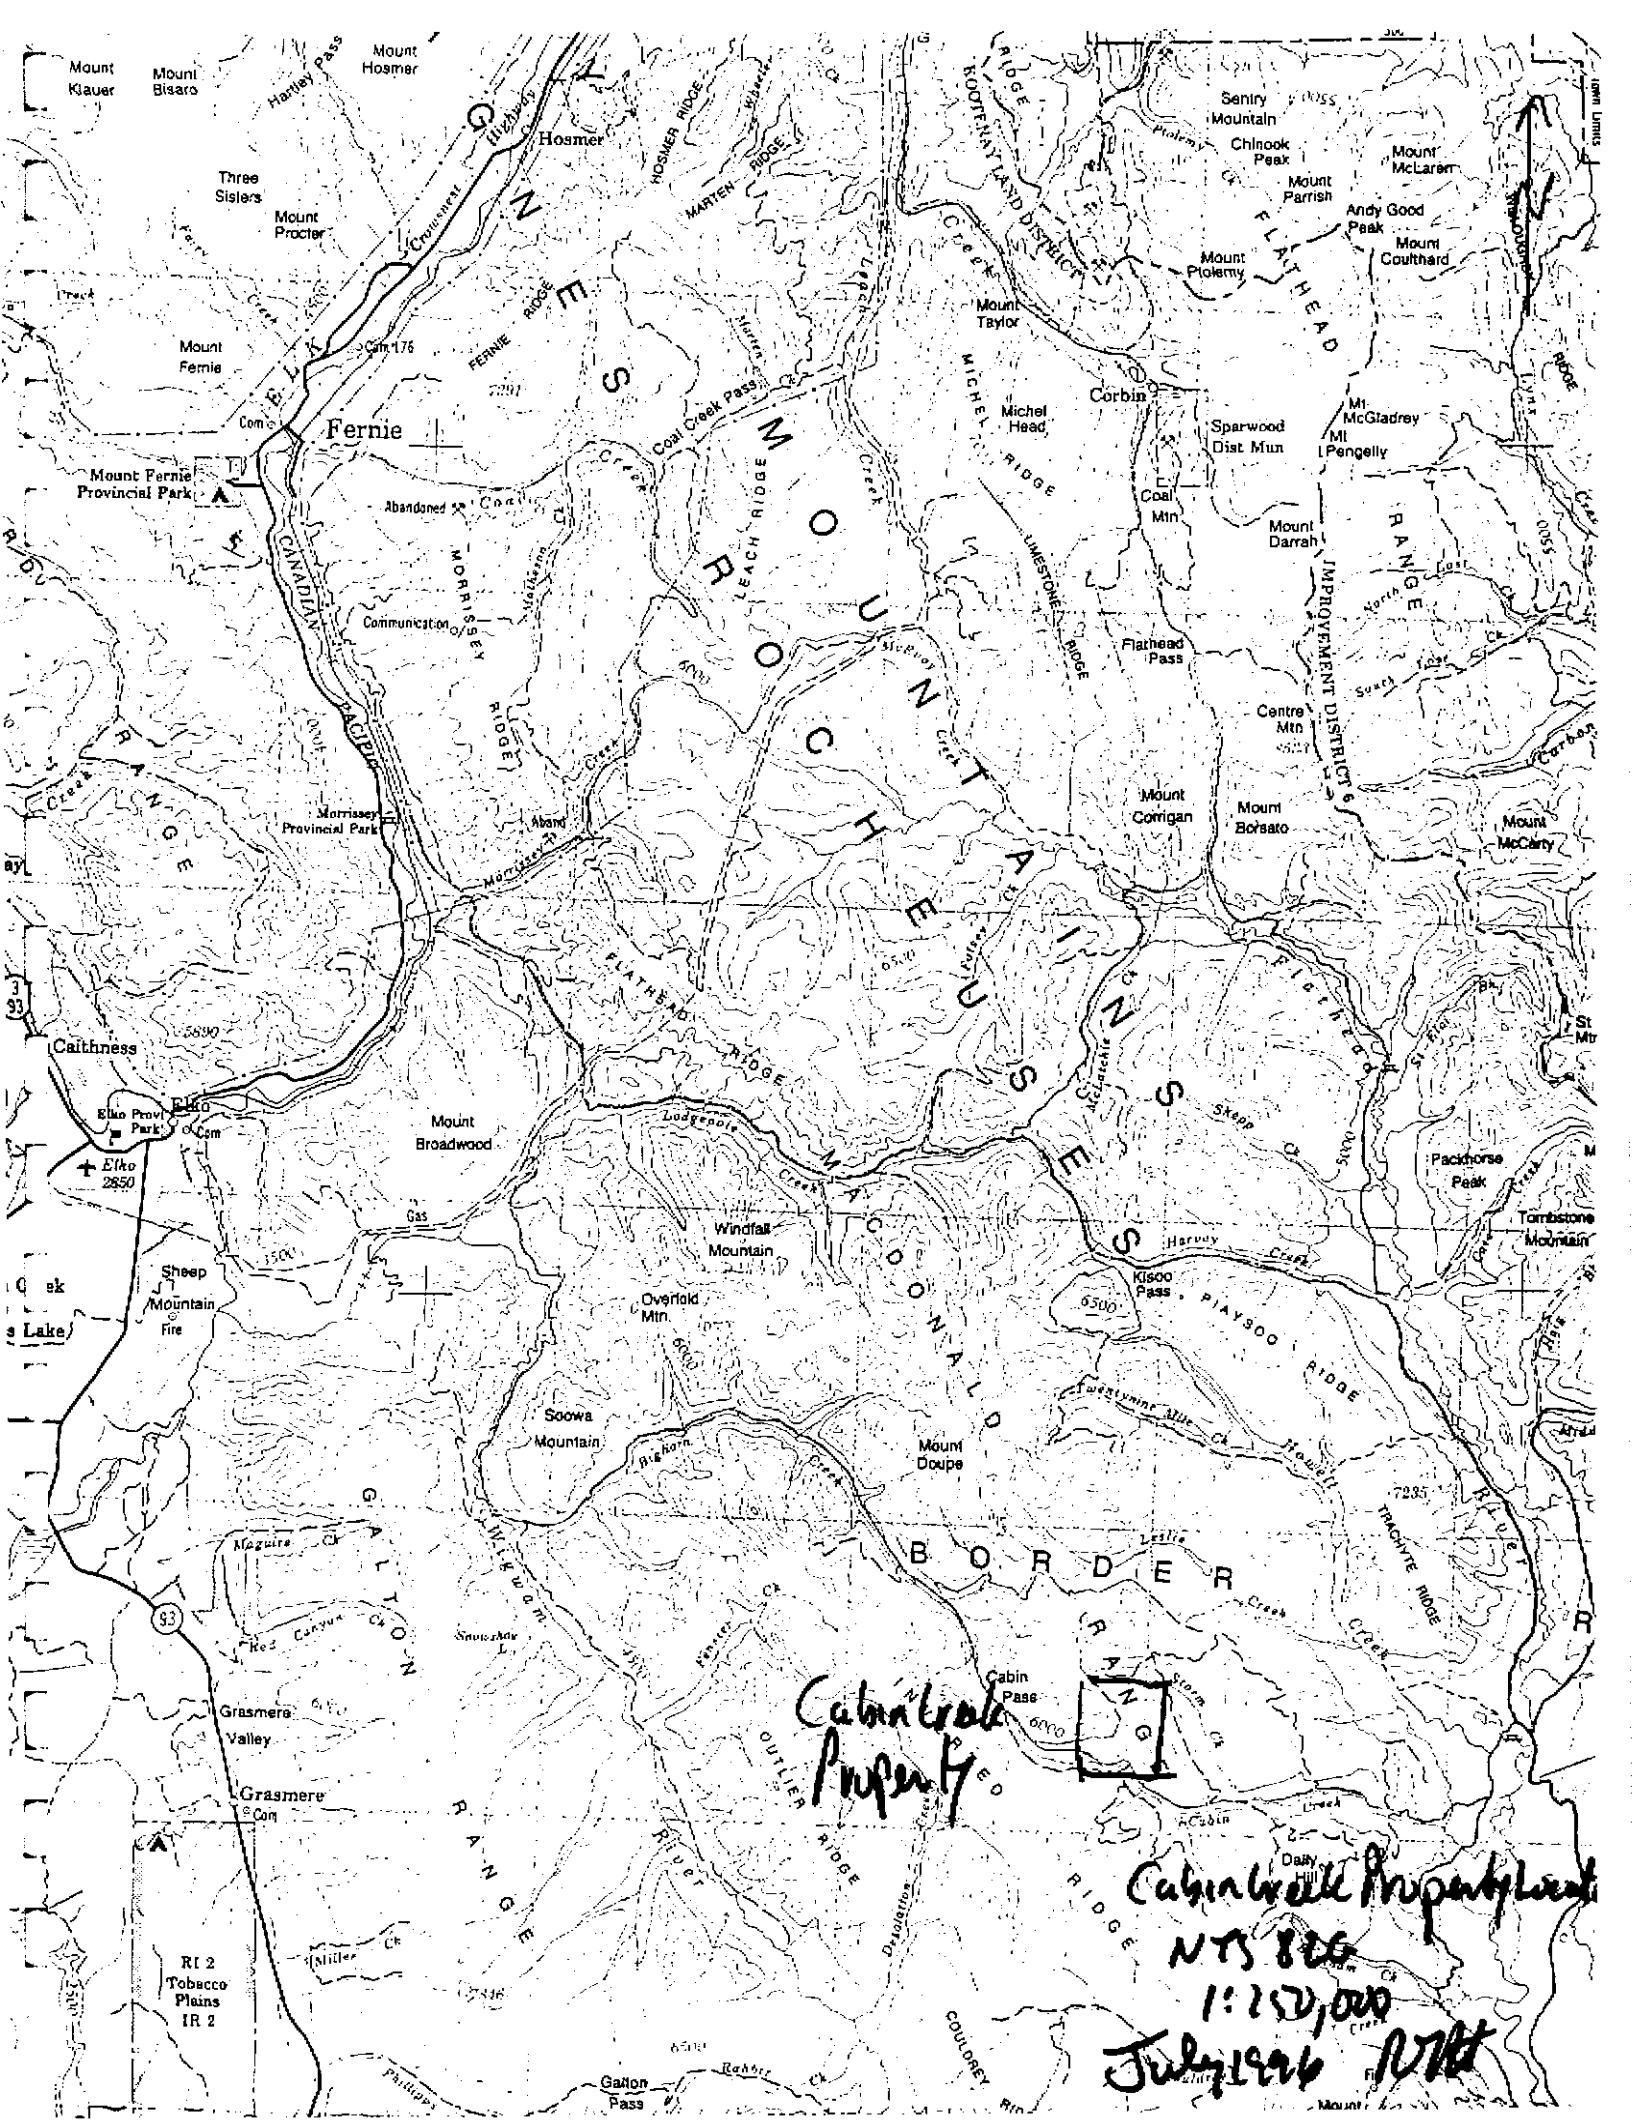

Fernie

Mount Fernie Provincial Park

Morrissey Provincial Park

Caitness

Elko Prov. Park

Elko 2850

Sheep Mountain Fire

Elko Lake

93

Grasmere Valley

Grasmere

RI 2 Tobacco Plains IR 2

Cabin Creek Property


G

Cabin Creek Property

NTS 800

1:250,000

July 1996

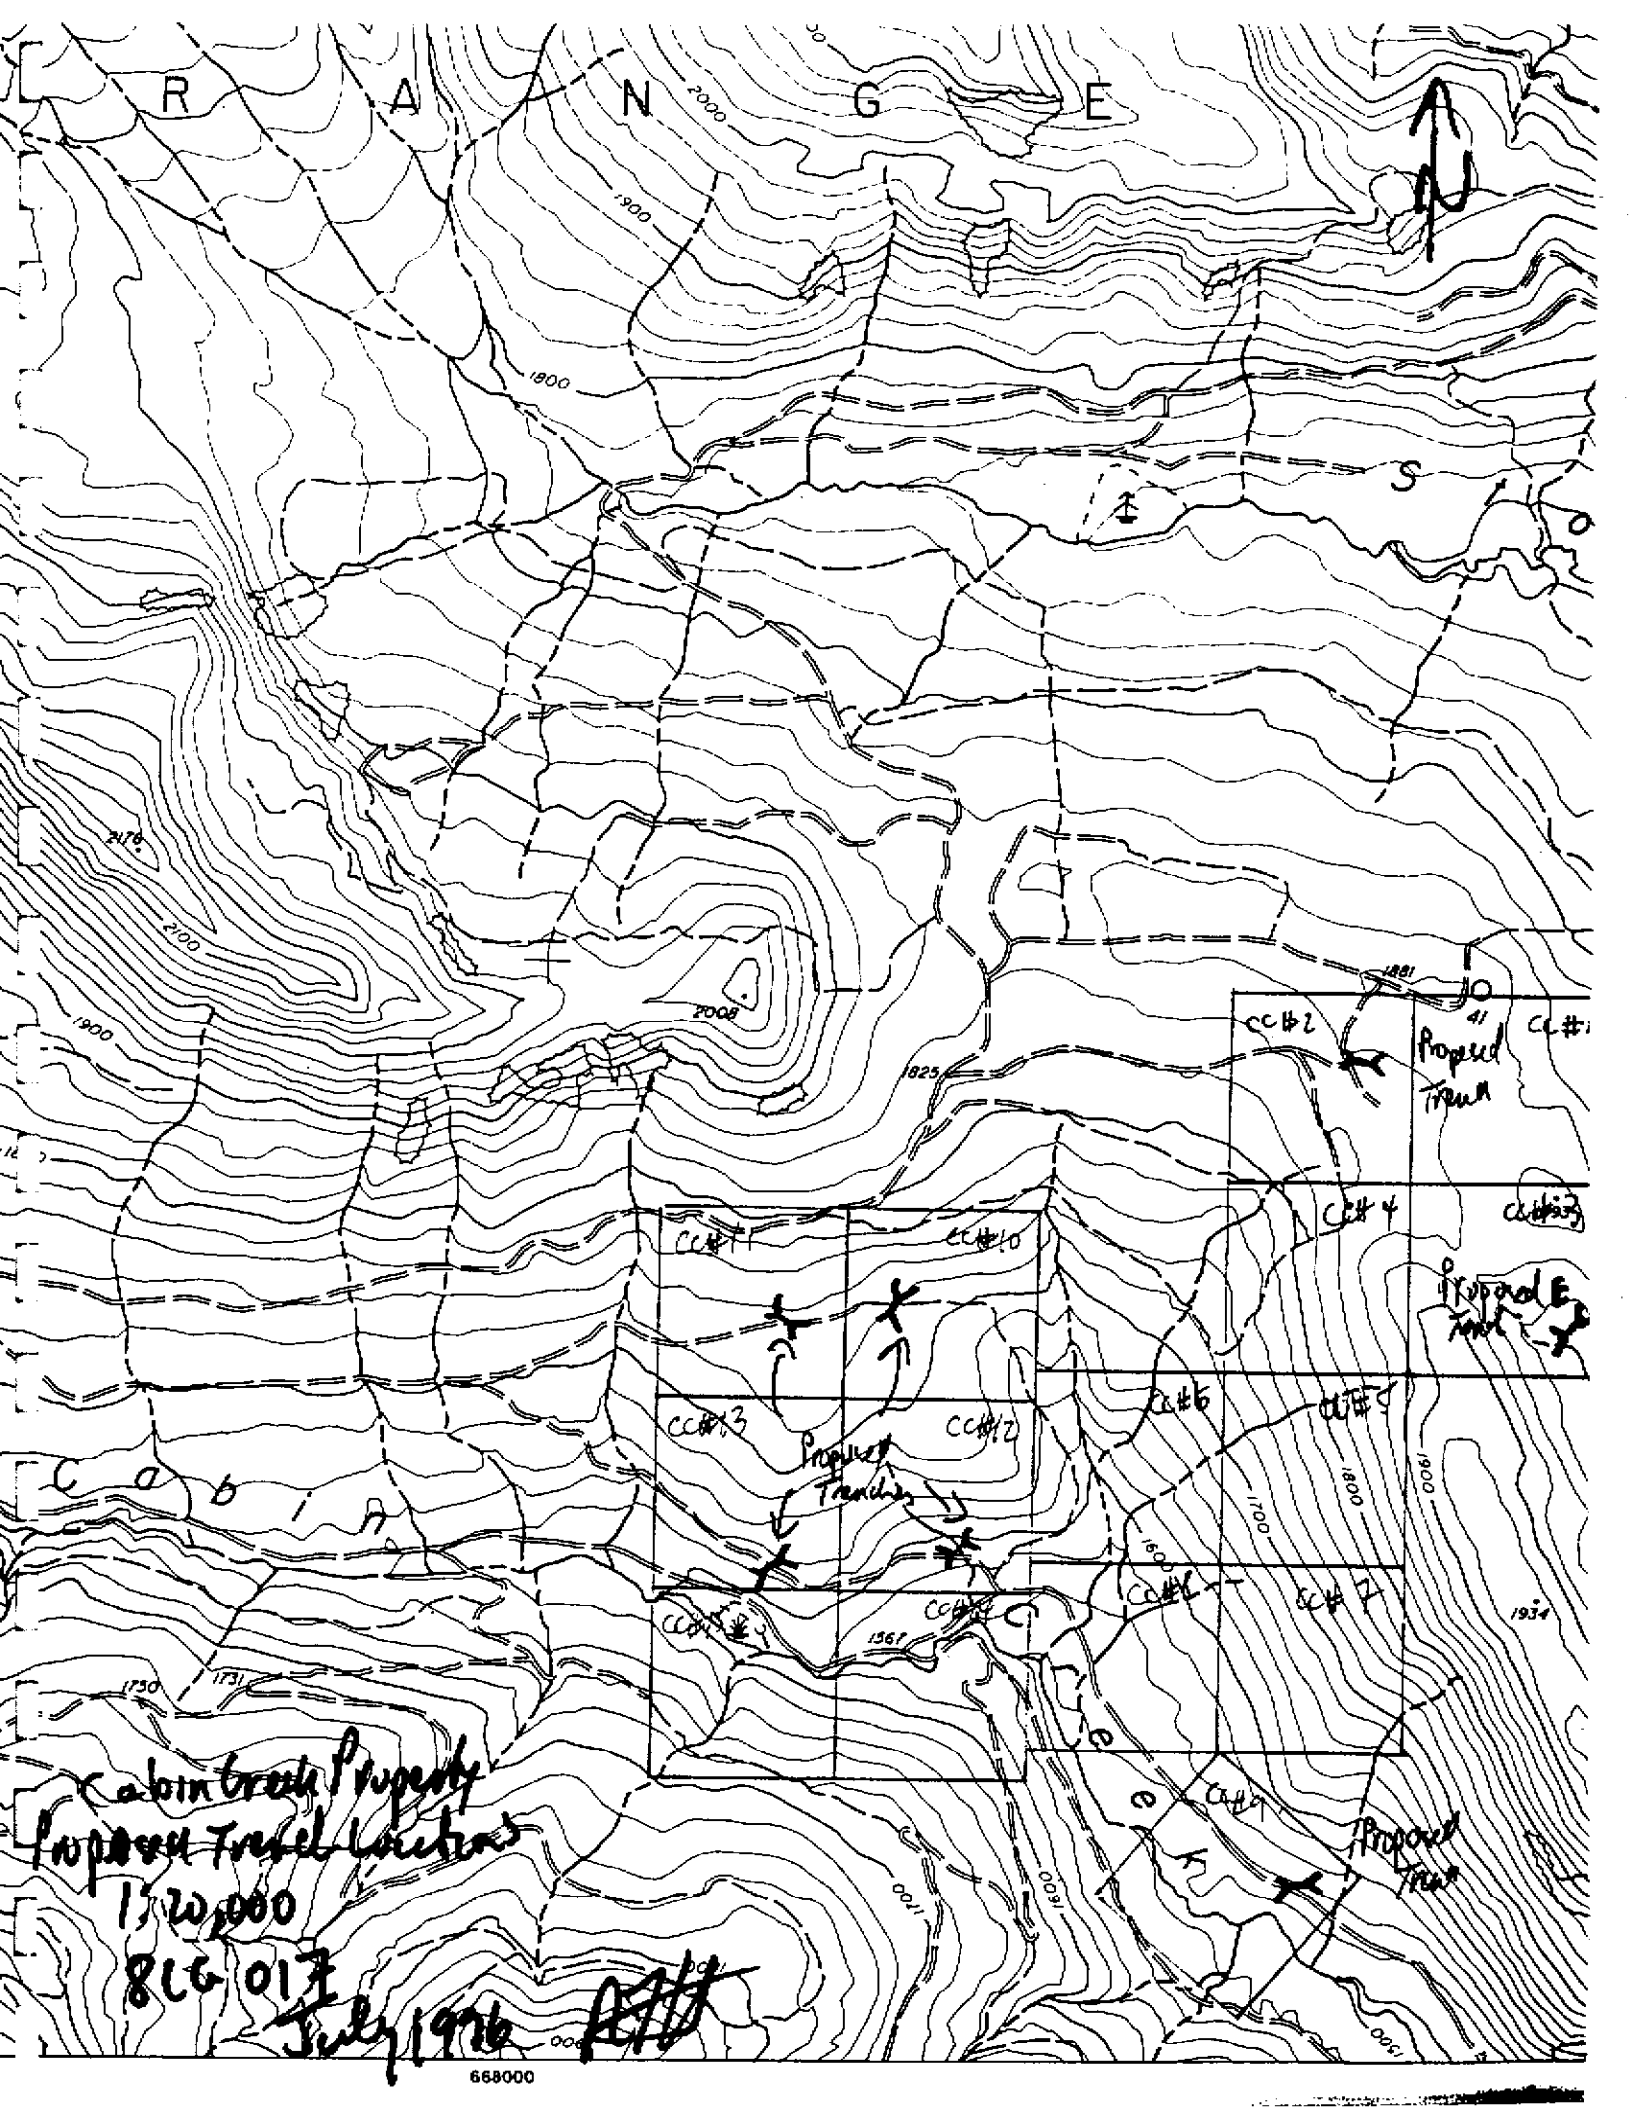


C R A N N G A T E



C o b i n a

Cabin Creek Property
Proposed Trench Location
1320,000
866 017
July 1976


ATJ

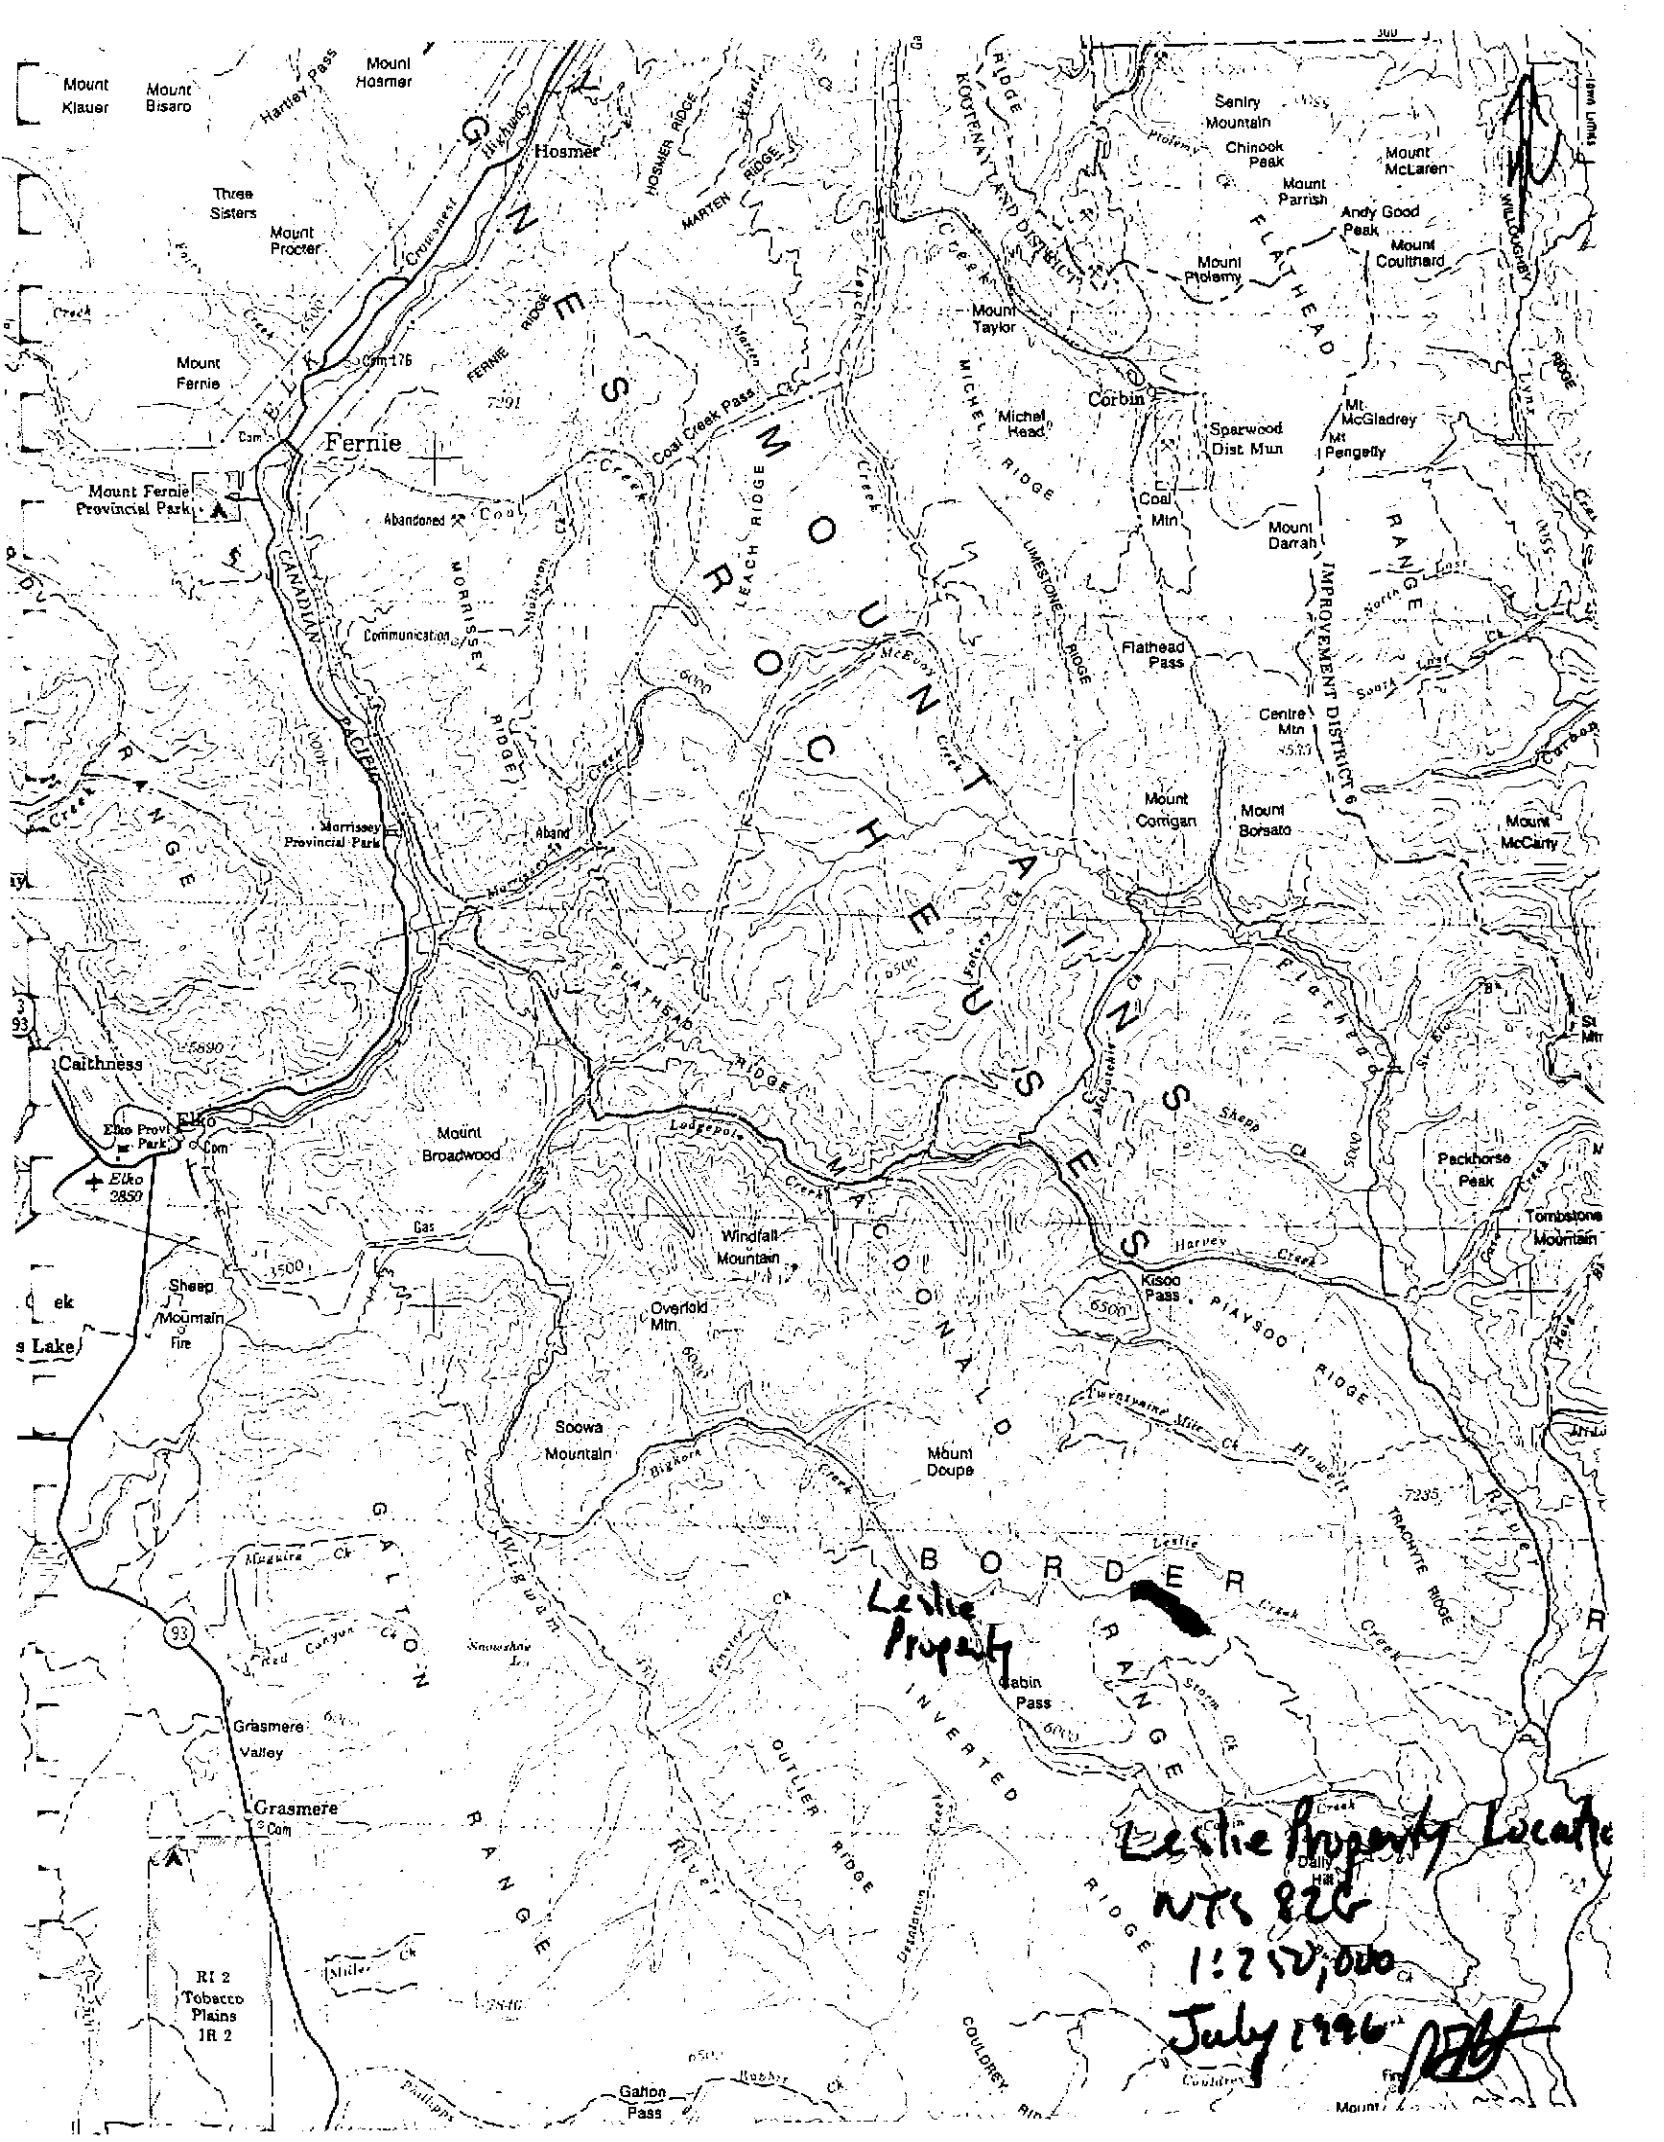


Lestie Property

Lestie Property Located
NRS 826
1:250,000
July 1996

[Handwritten Signature]

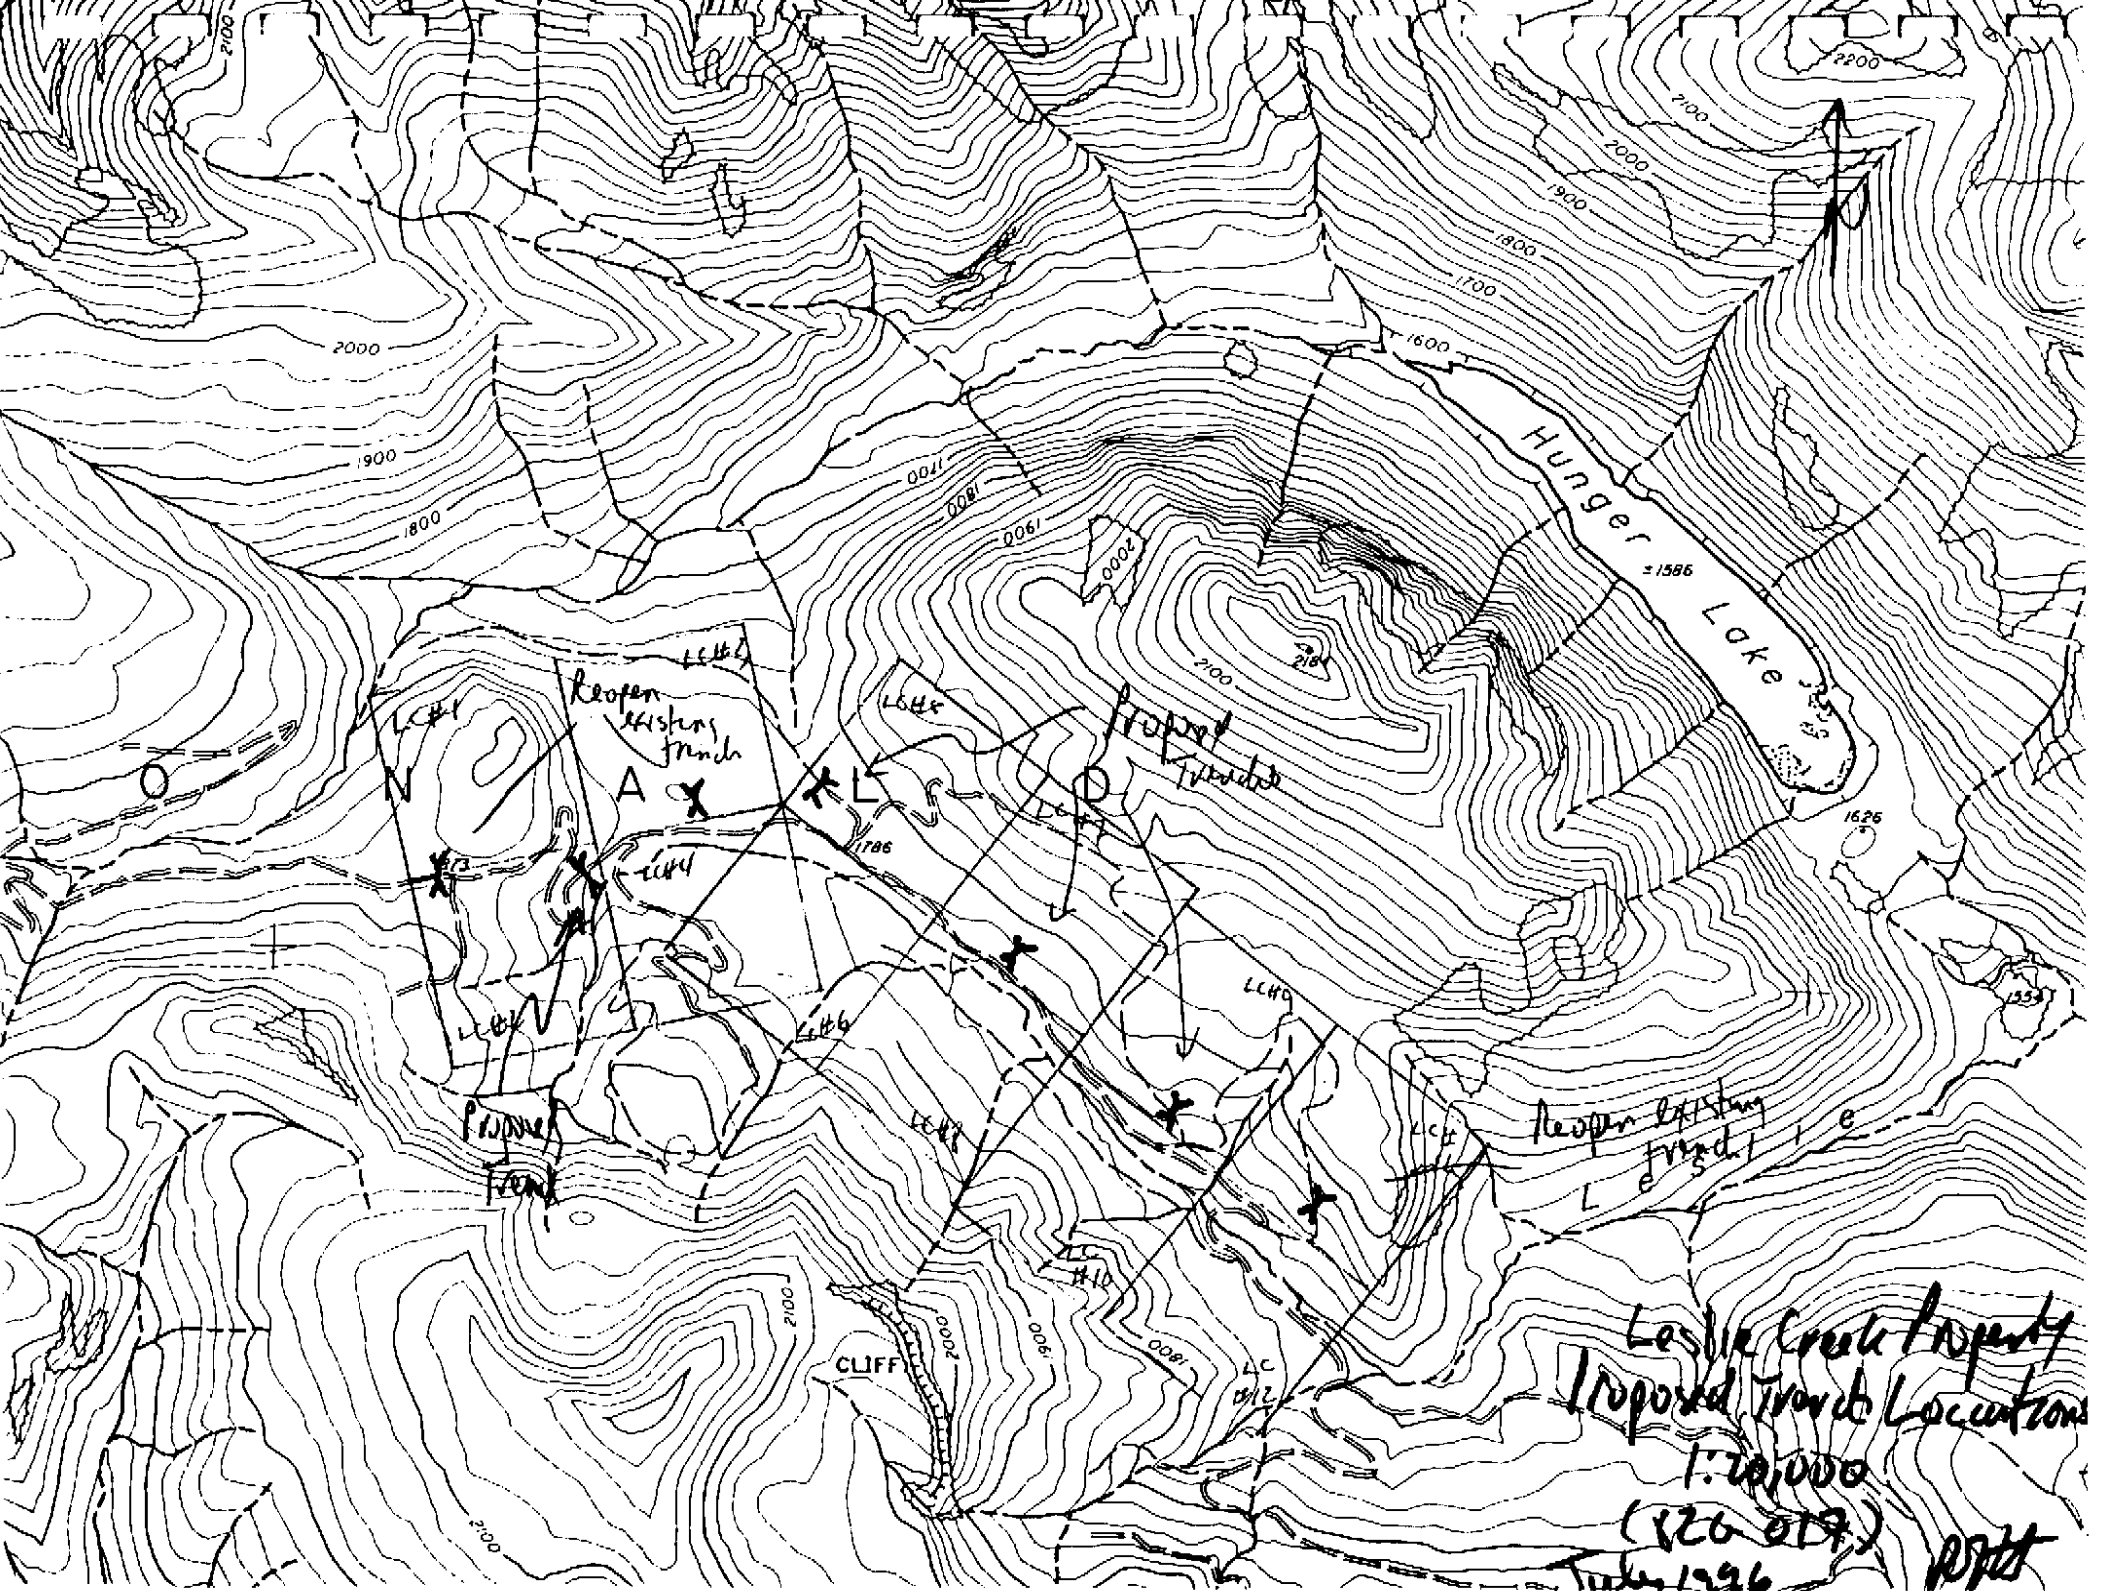

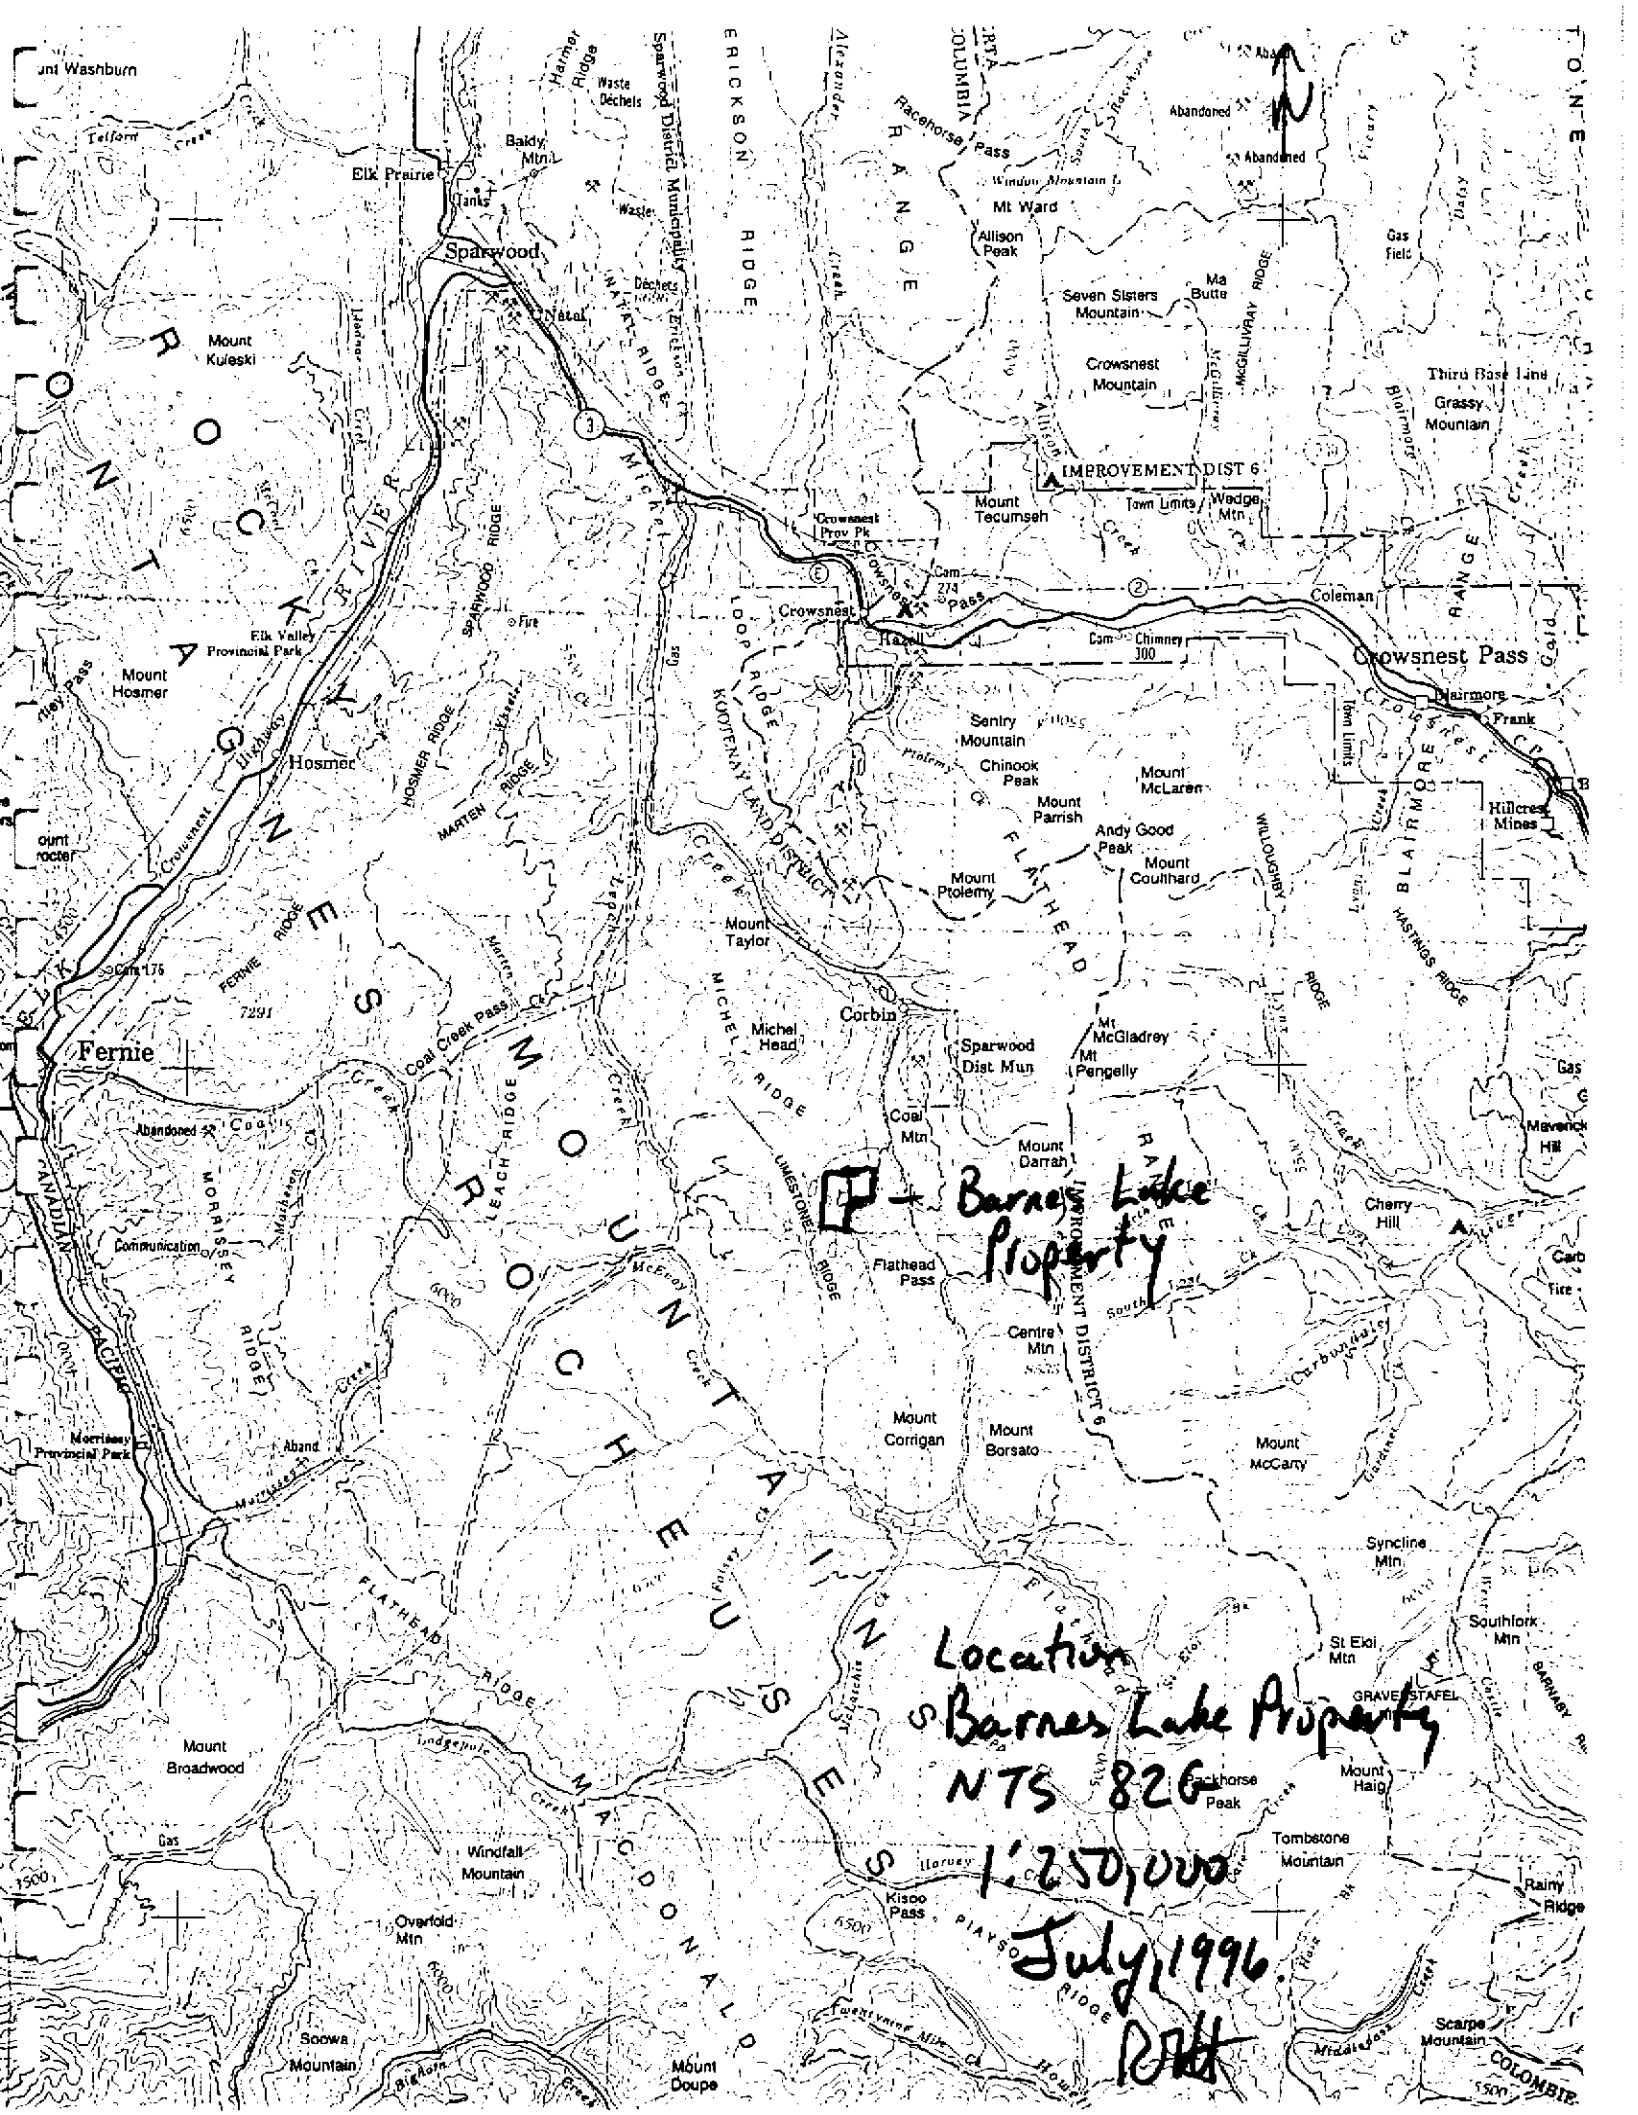

Barnes Lake Property


Location of Barnes Lake Property

NTS 826

1:250,000

July, 1996

RAH

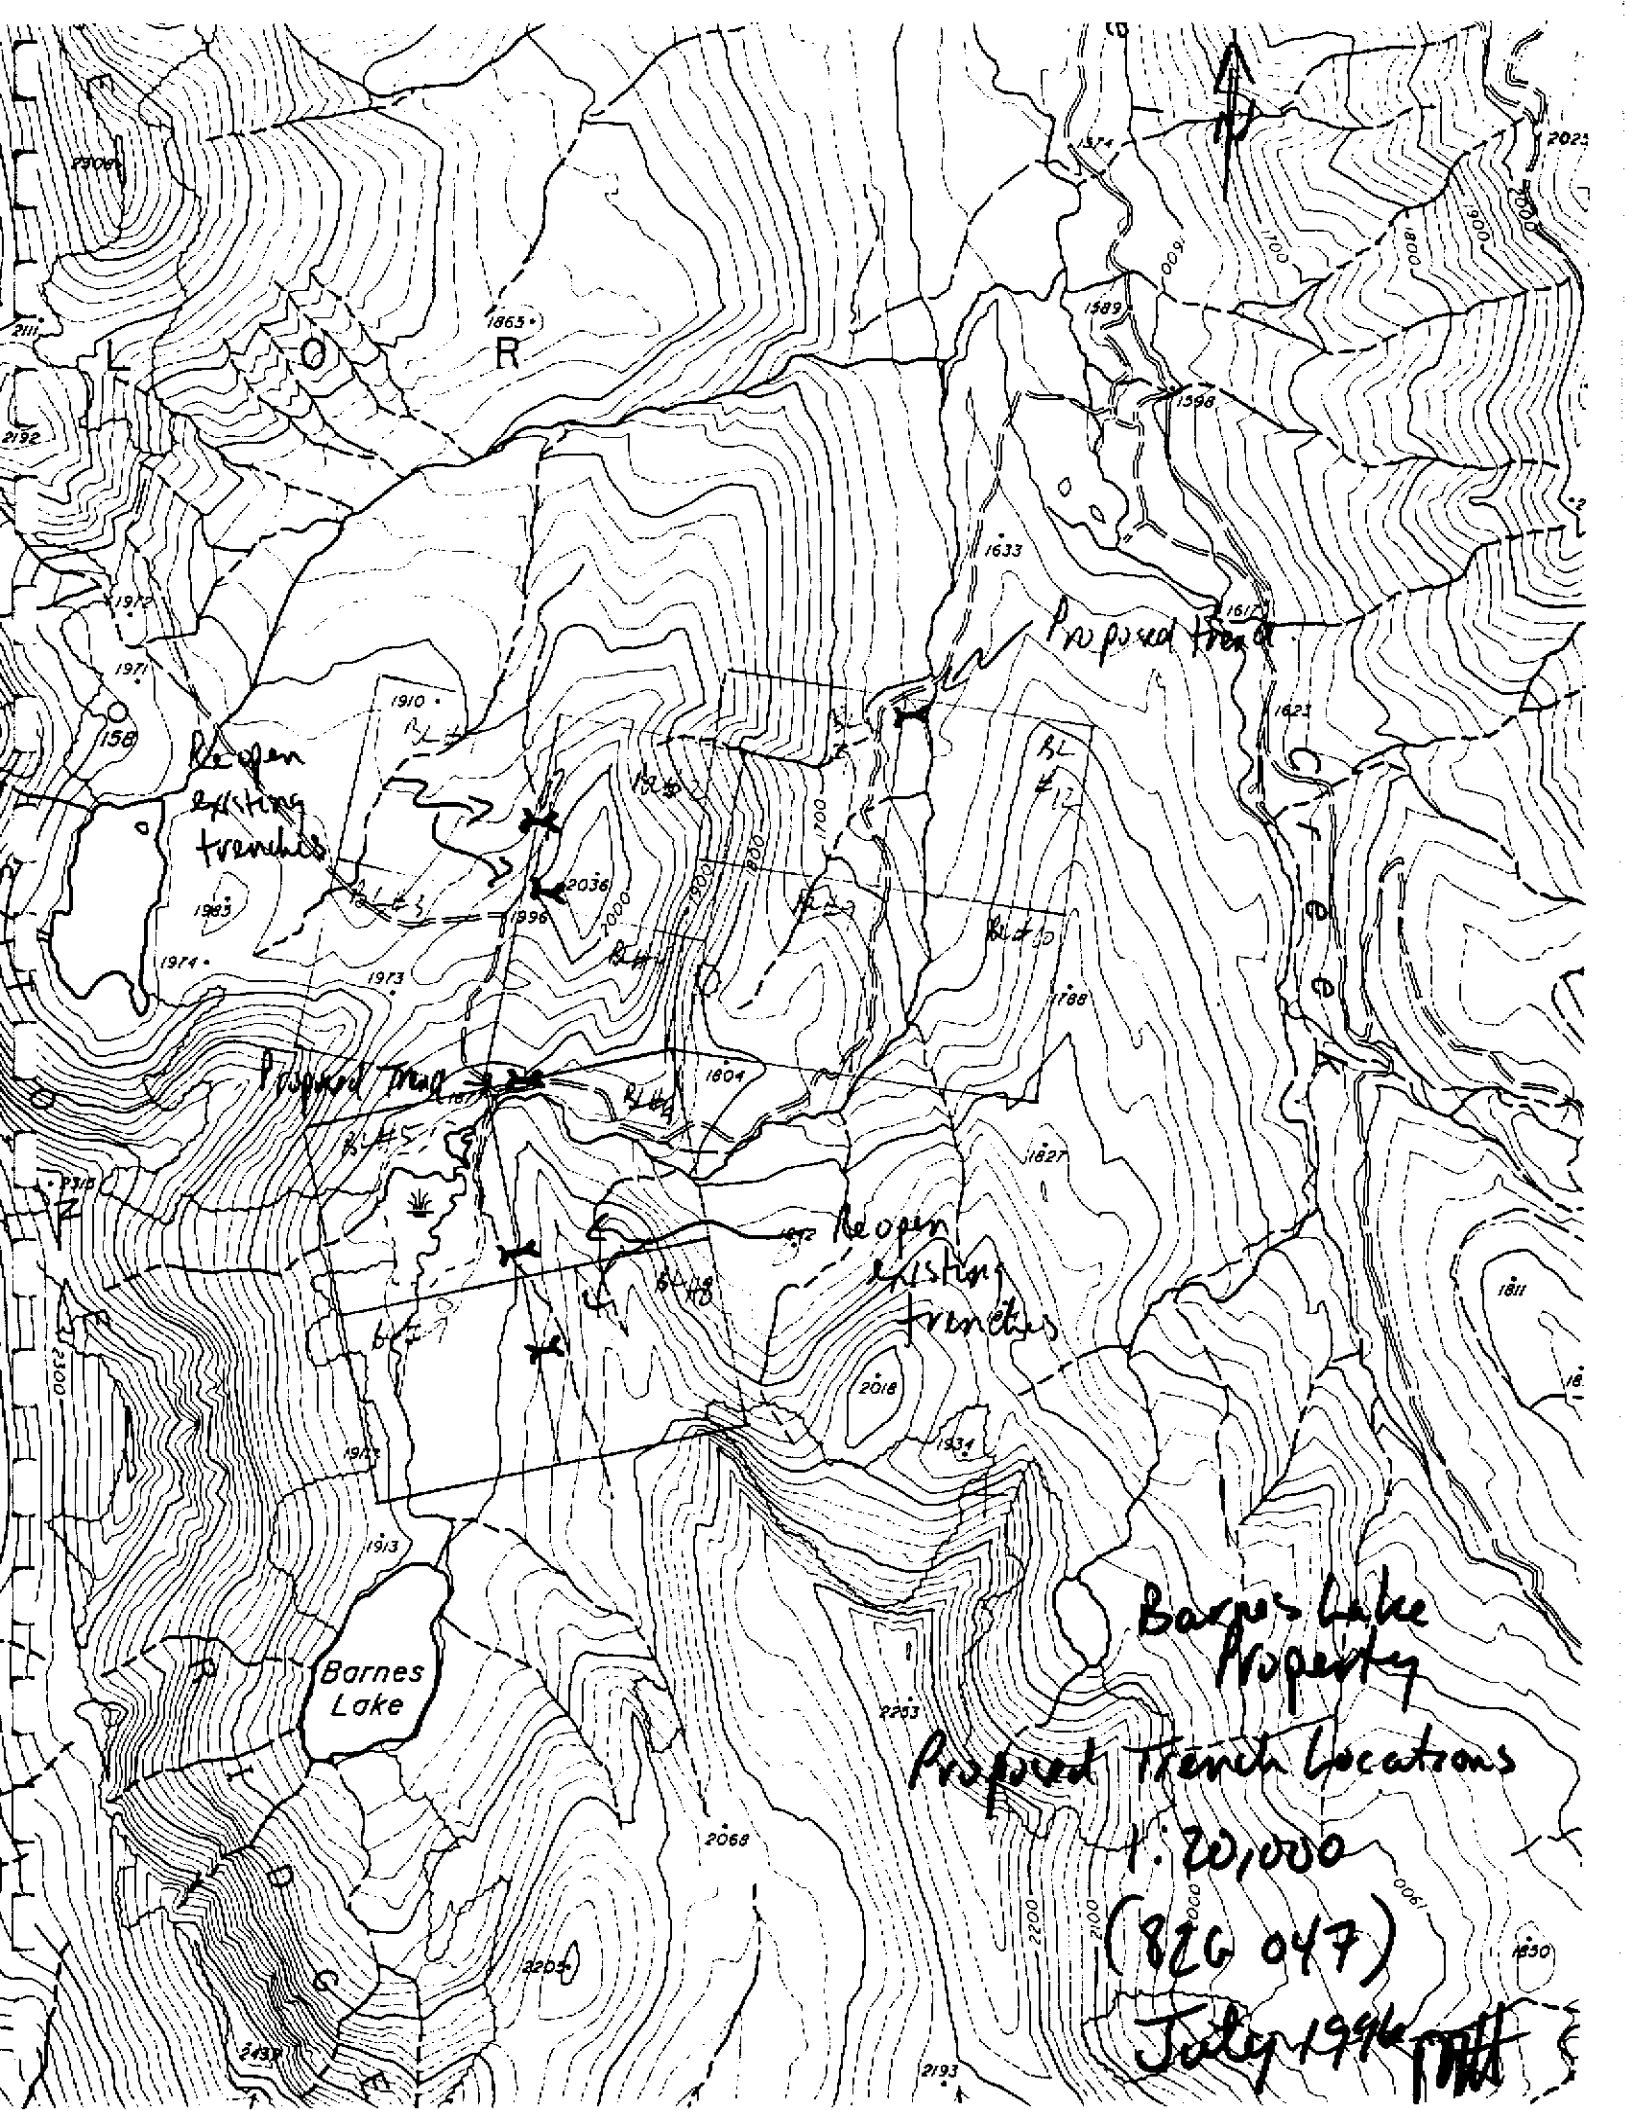

Reopen existing trenches

Proposed Trench

Proposed Trench

Reopen existing trenches

Barnes Lake


Barnes Lake Property

Proposed Trench Locations

1:20,000

(826 047)

July 1996

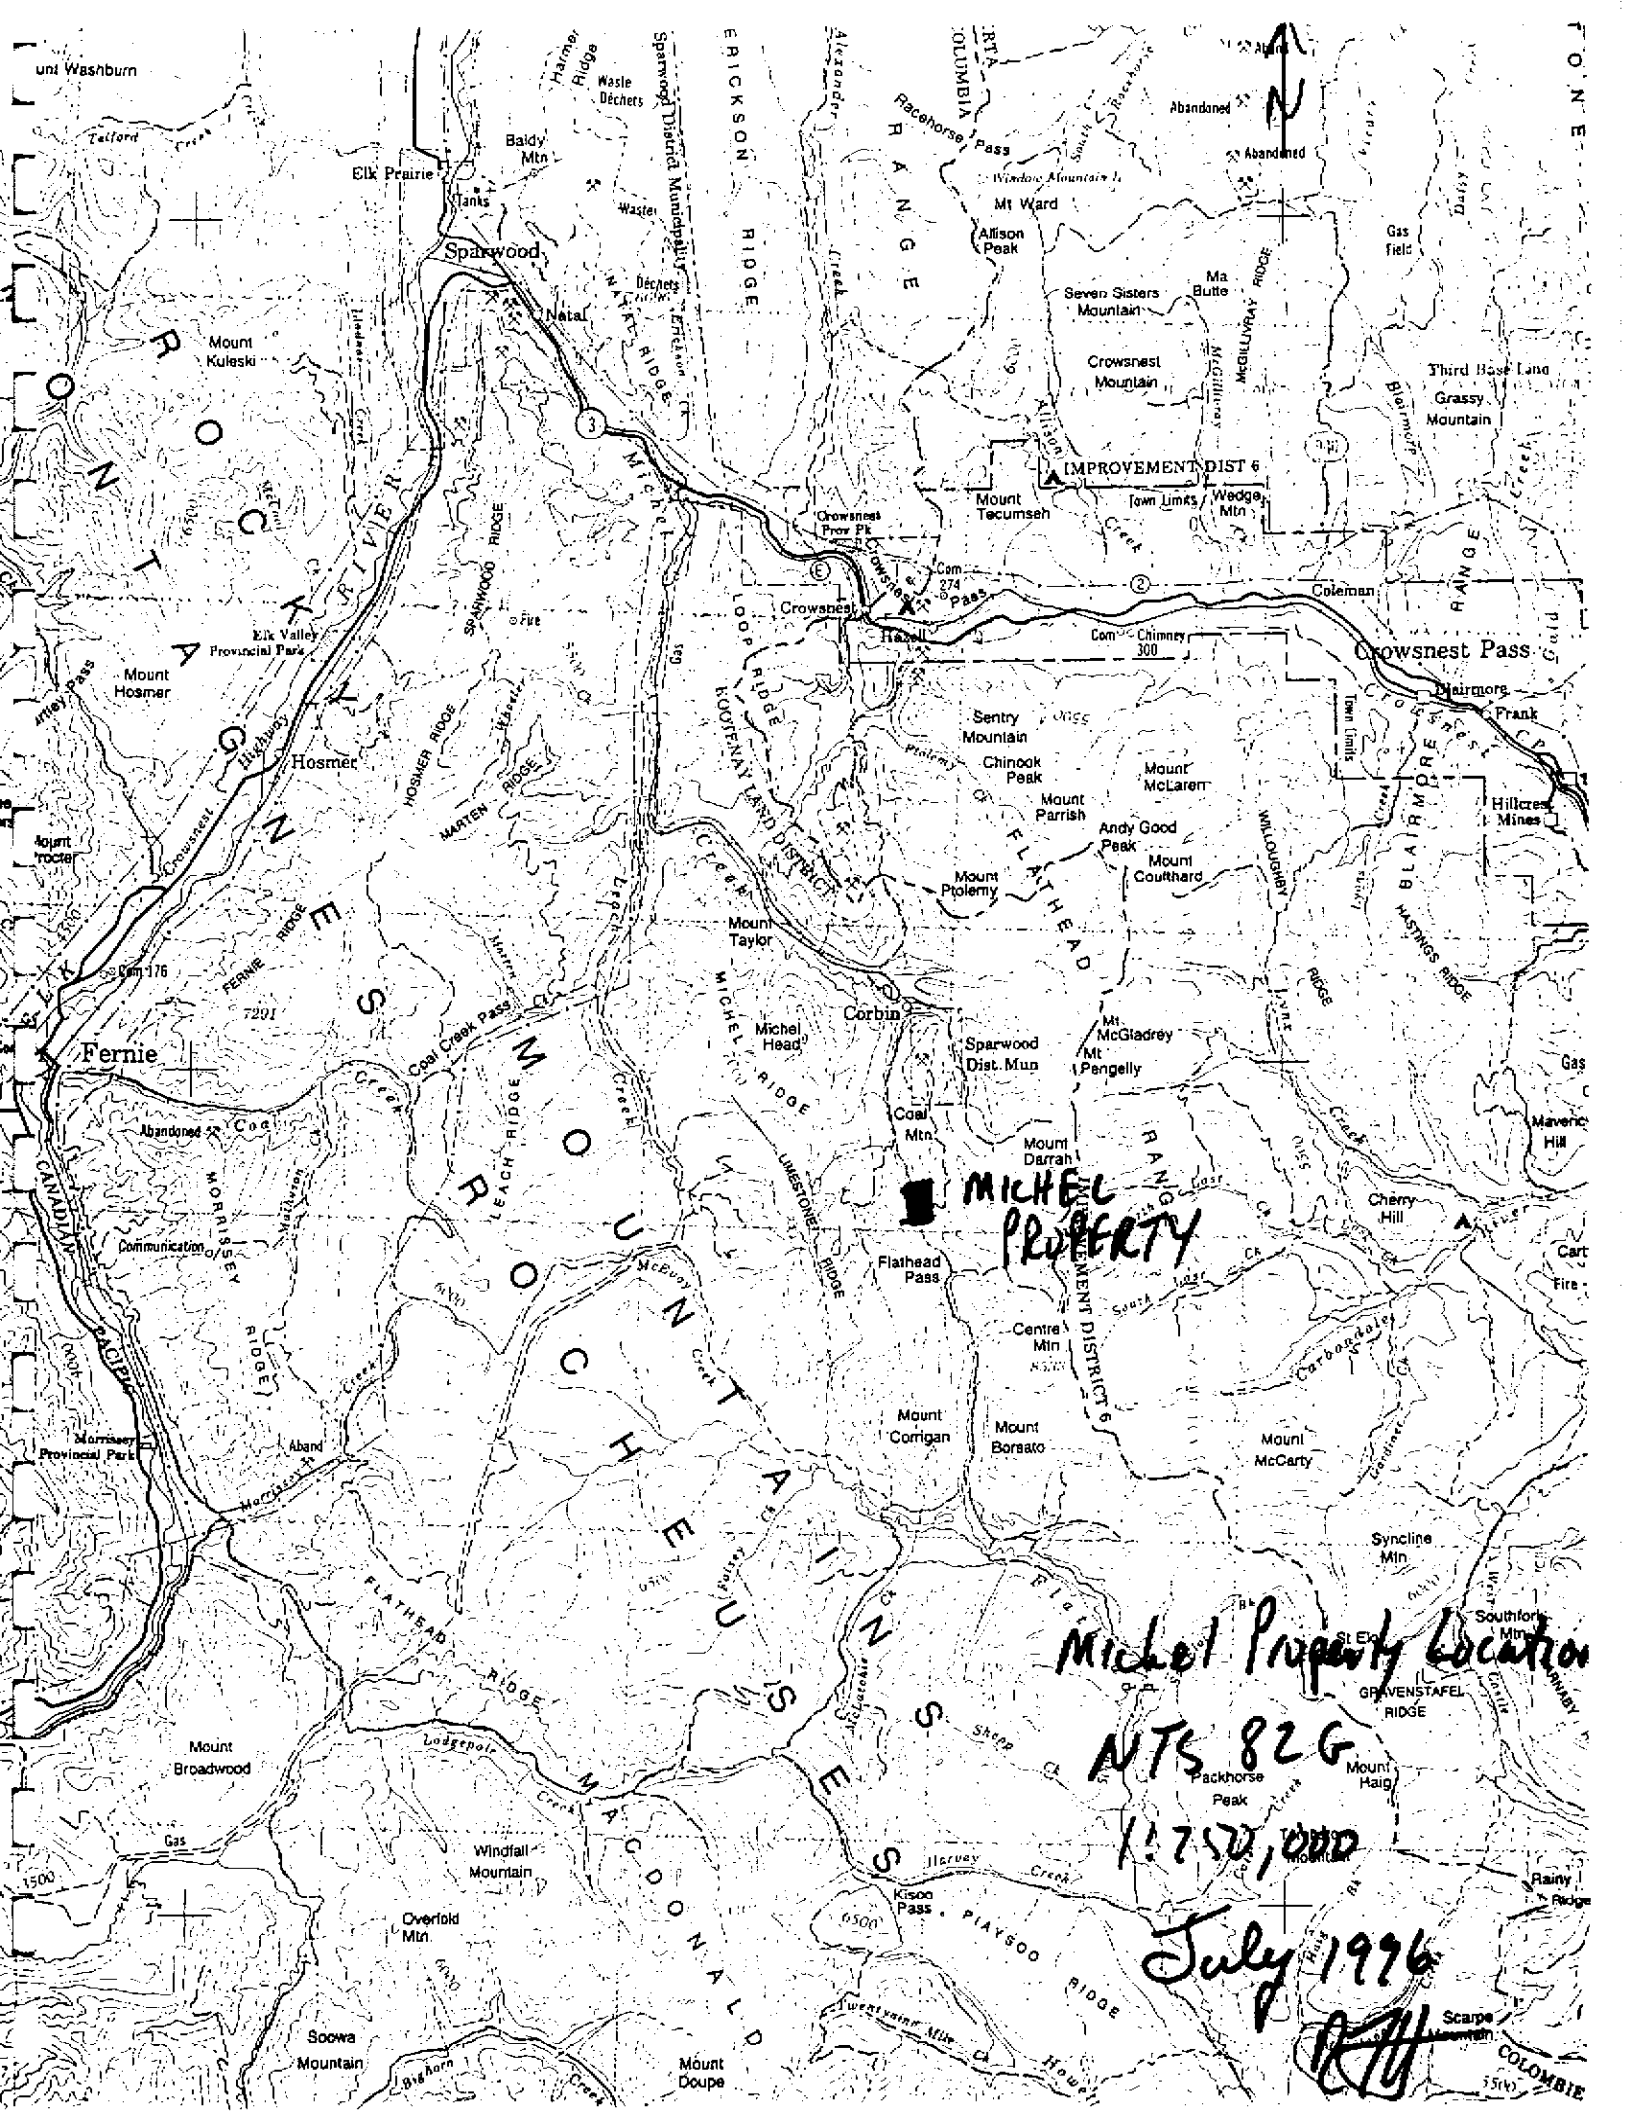

MICHEL PROPERTY


Michel Property Location

NTS 82G

1:250,000

July 1996

[Handwritten Signature]

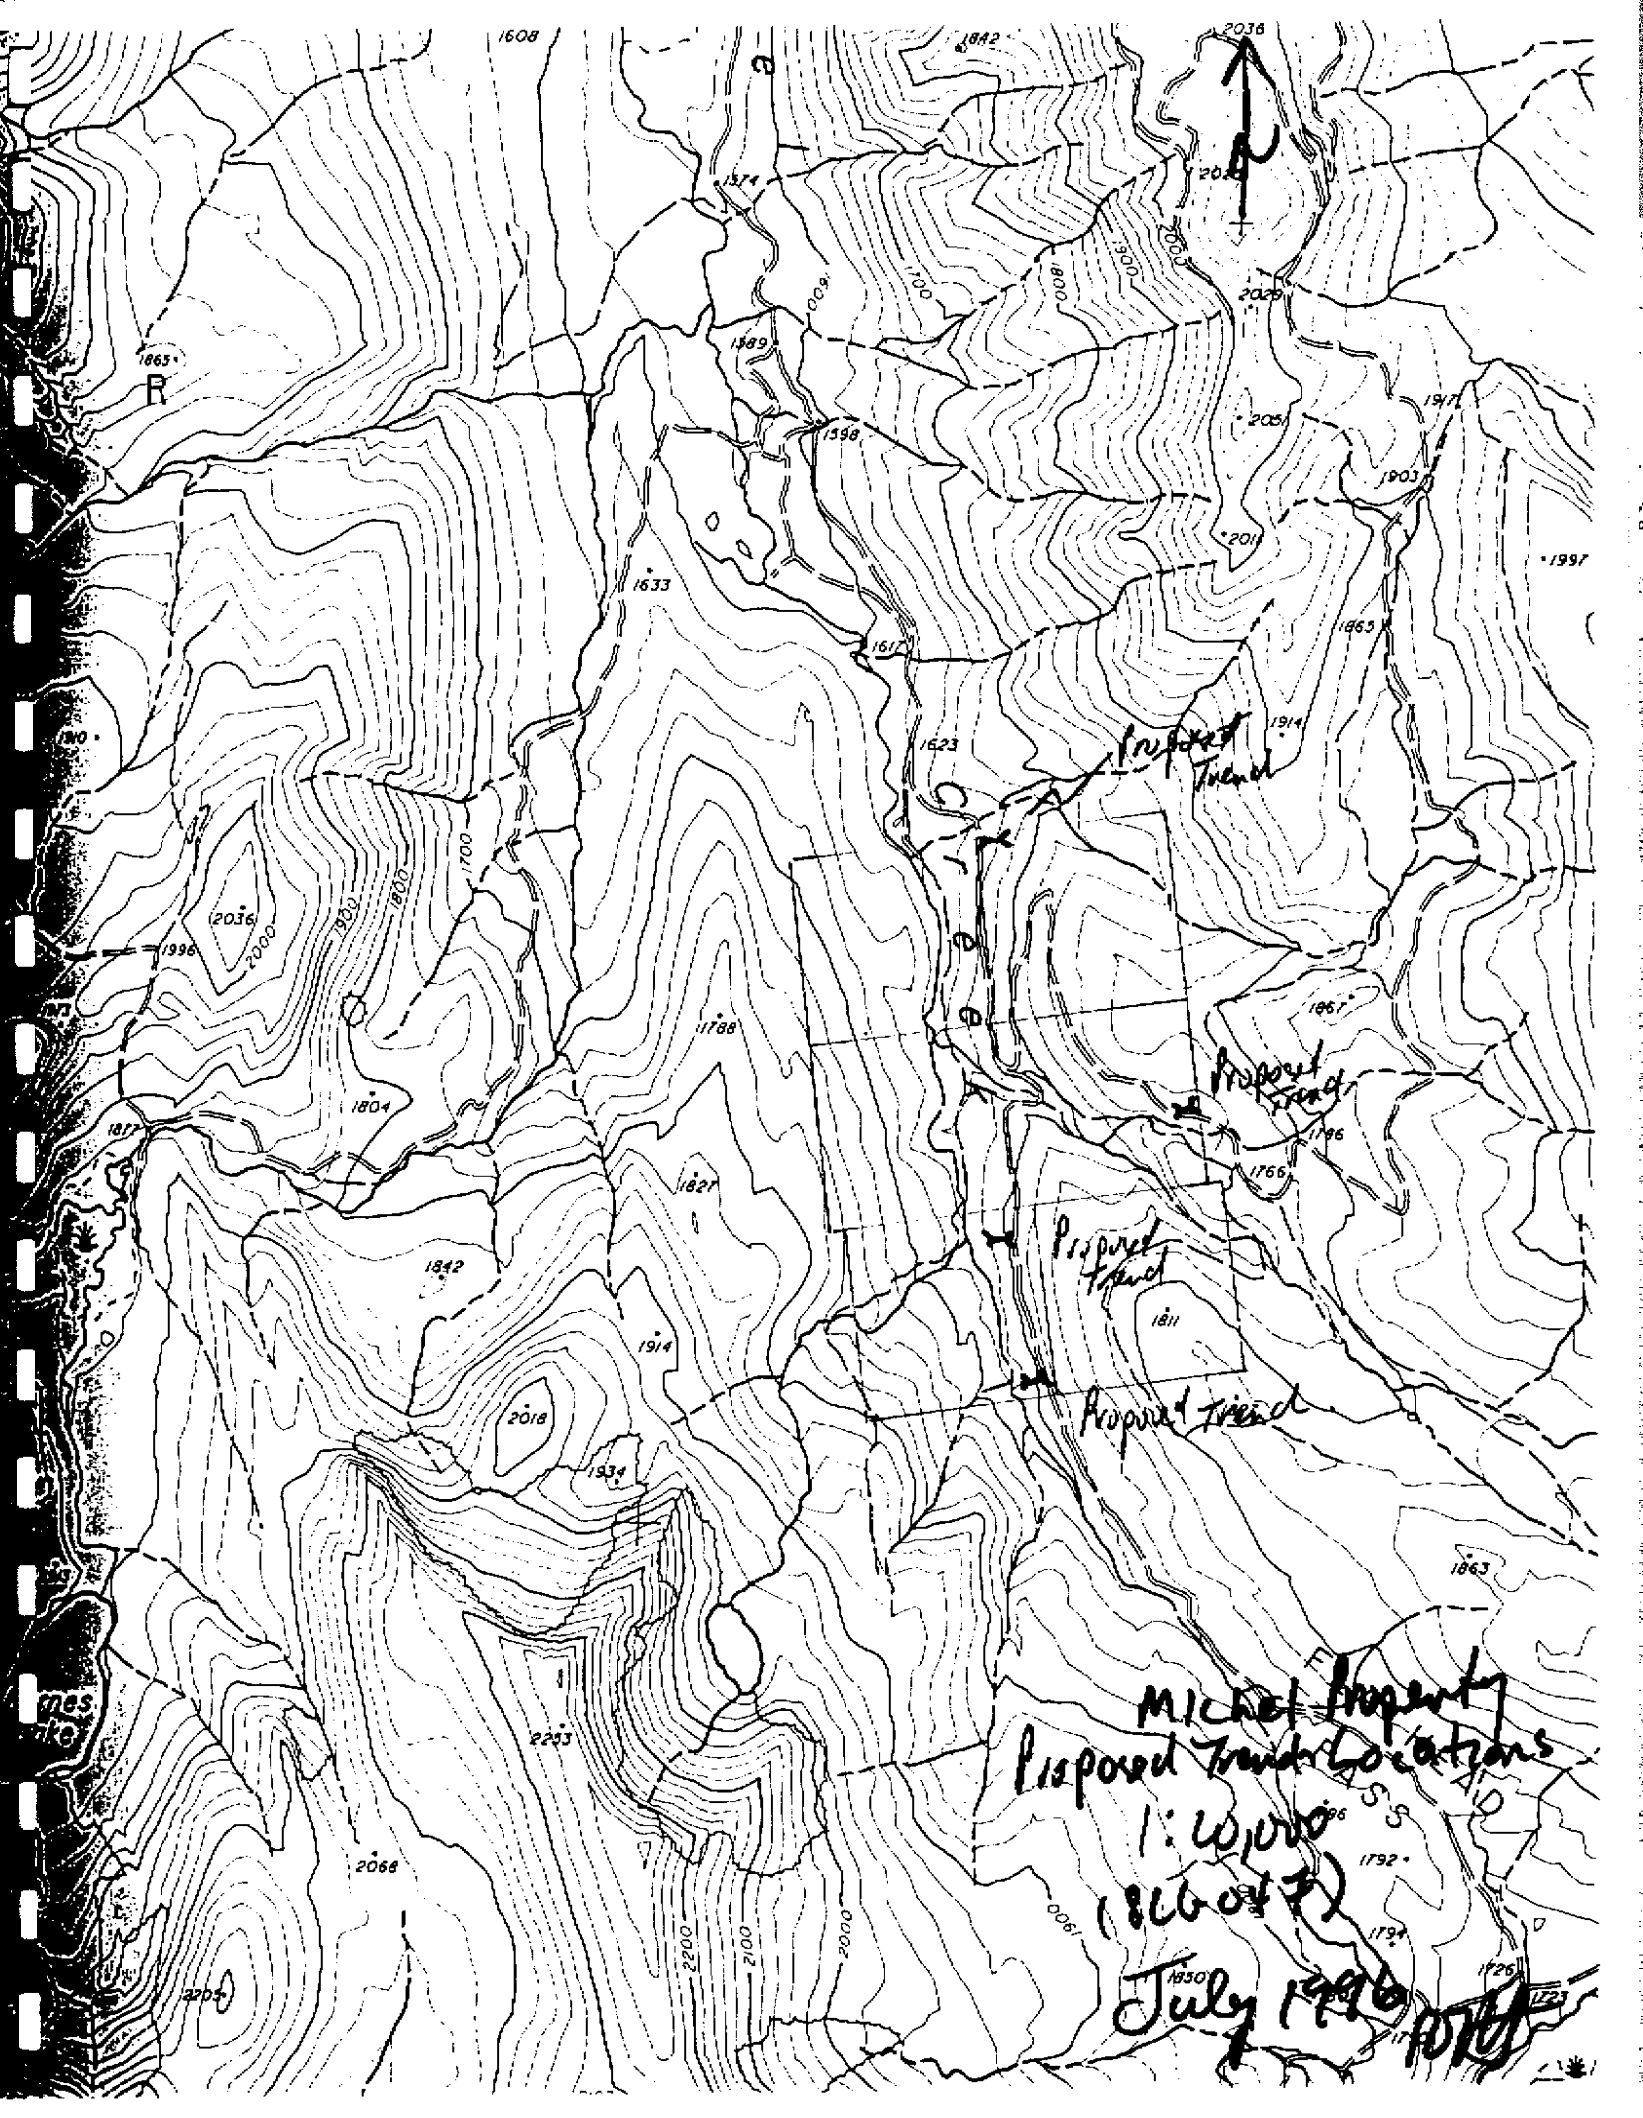

2036

1865

R

1608

1842

2025

2020

2005

2011

1977

1903

1997

1865

1633

1598

1623

1914

2036

2000

2000

2000

1700

1788

1867

1804

1796

1811

1842

1821

1811

1914

2018

1934

1863

mesa

2203

Michel Property
Proposed Trench Locations

1:10,000
(826047)

July 1996

1076

2068

2002

2012

2000

1800

1792

1794


1830

1726

1723

2004


1076

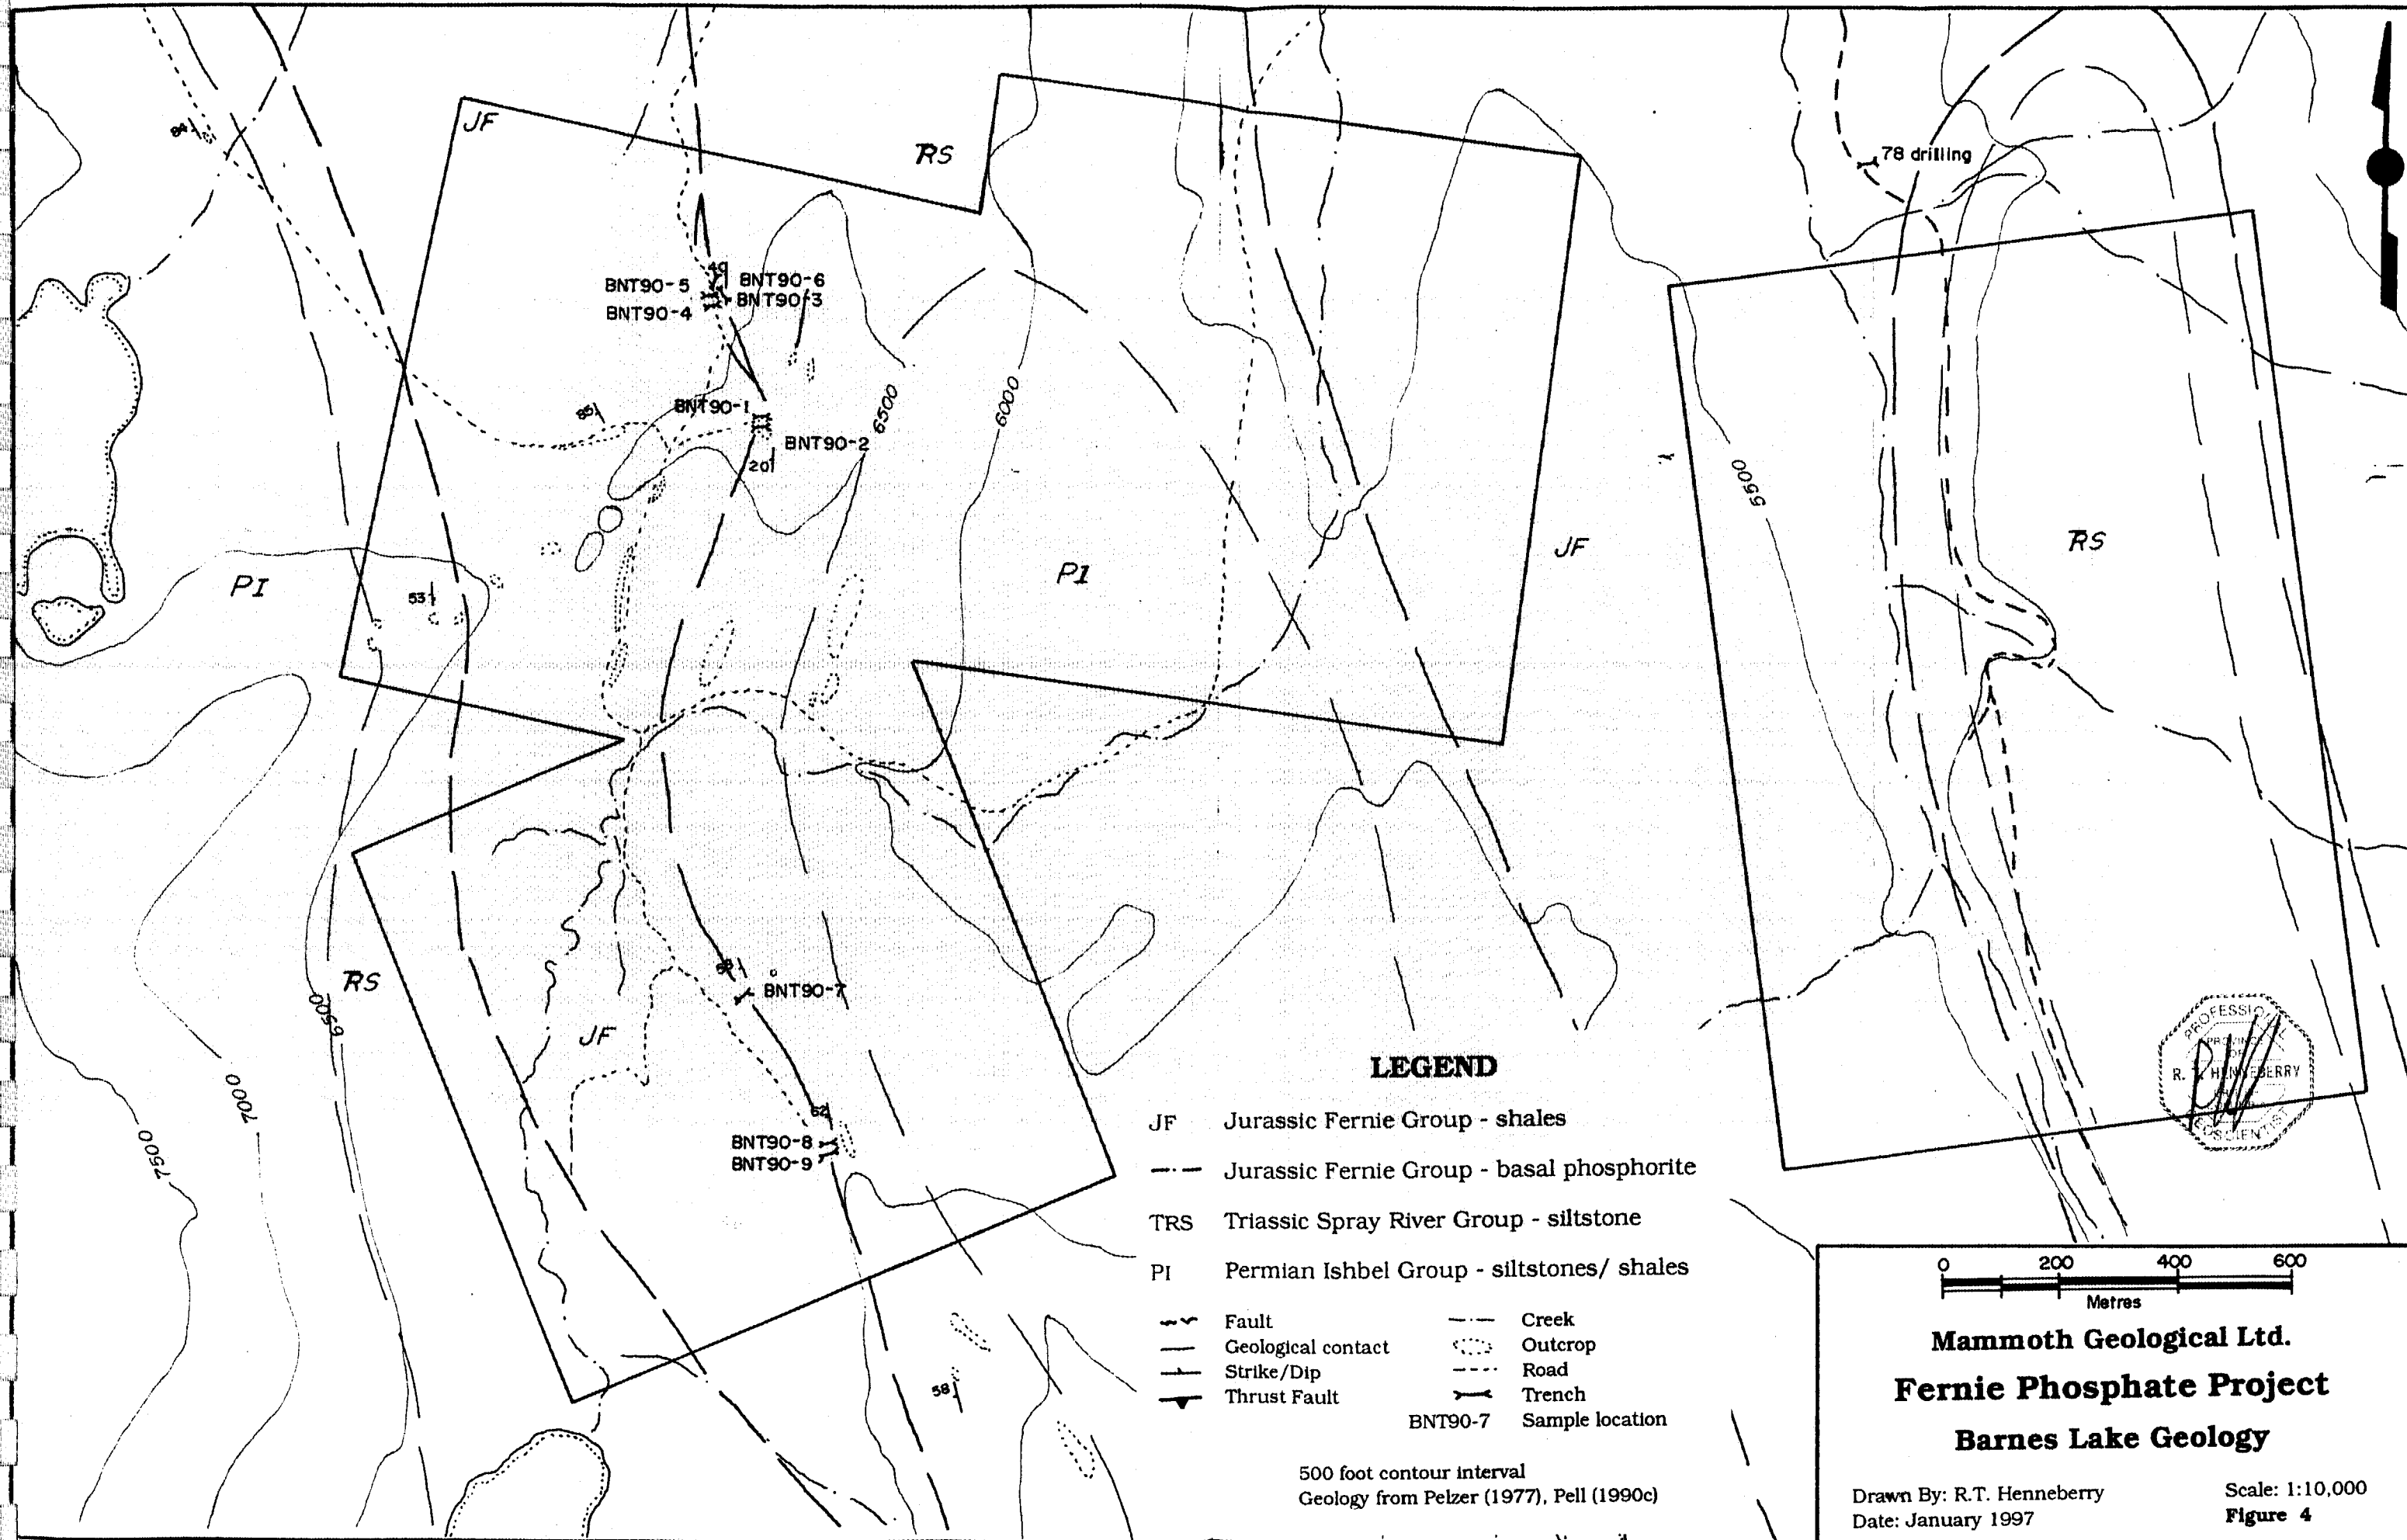

LEGEND

- JF Jurassic Fernie Group - shales
- Jurassic Fernie Group - basal phosphorite
- TRS Triassic Spray River Group - siltstone
- PI Permian Ishbel Group - siltstones/ shales
- - - Fault
- - - Geological contact
- - - Strike/Dip
- - - Thrust Fault
- - - Creek
- - - Outcrop
- - - Road
- - - Trench
- BNT90-7 Sample location


500 foot contour interval
 Geology from Pelzer (1977), Pell (1990c)



Mammoth Geological Ltd.
Fernie Phosphate Project
Barnes Lake Geology

Drawn By: R.T. Henneberry
 Date: January 1997


Scale: 1:10,000
 Figure 4

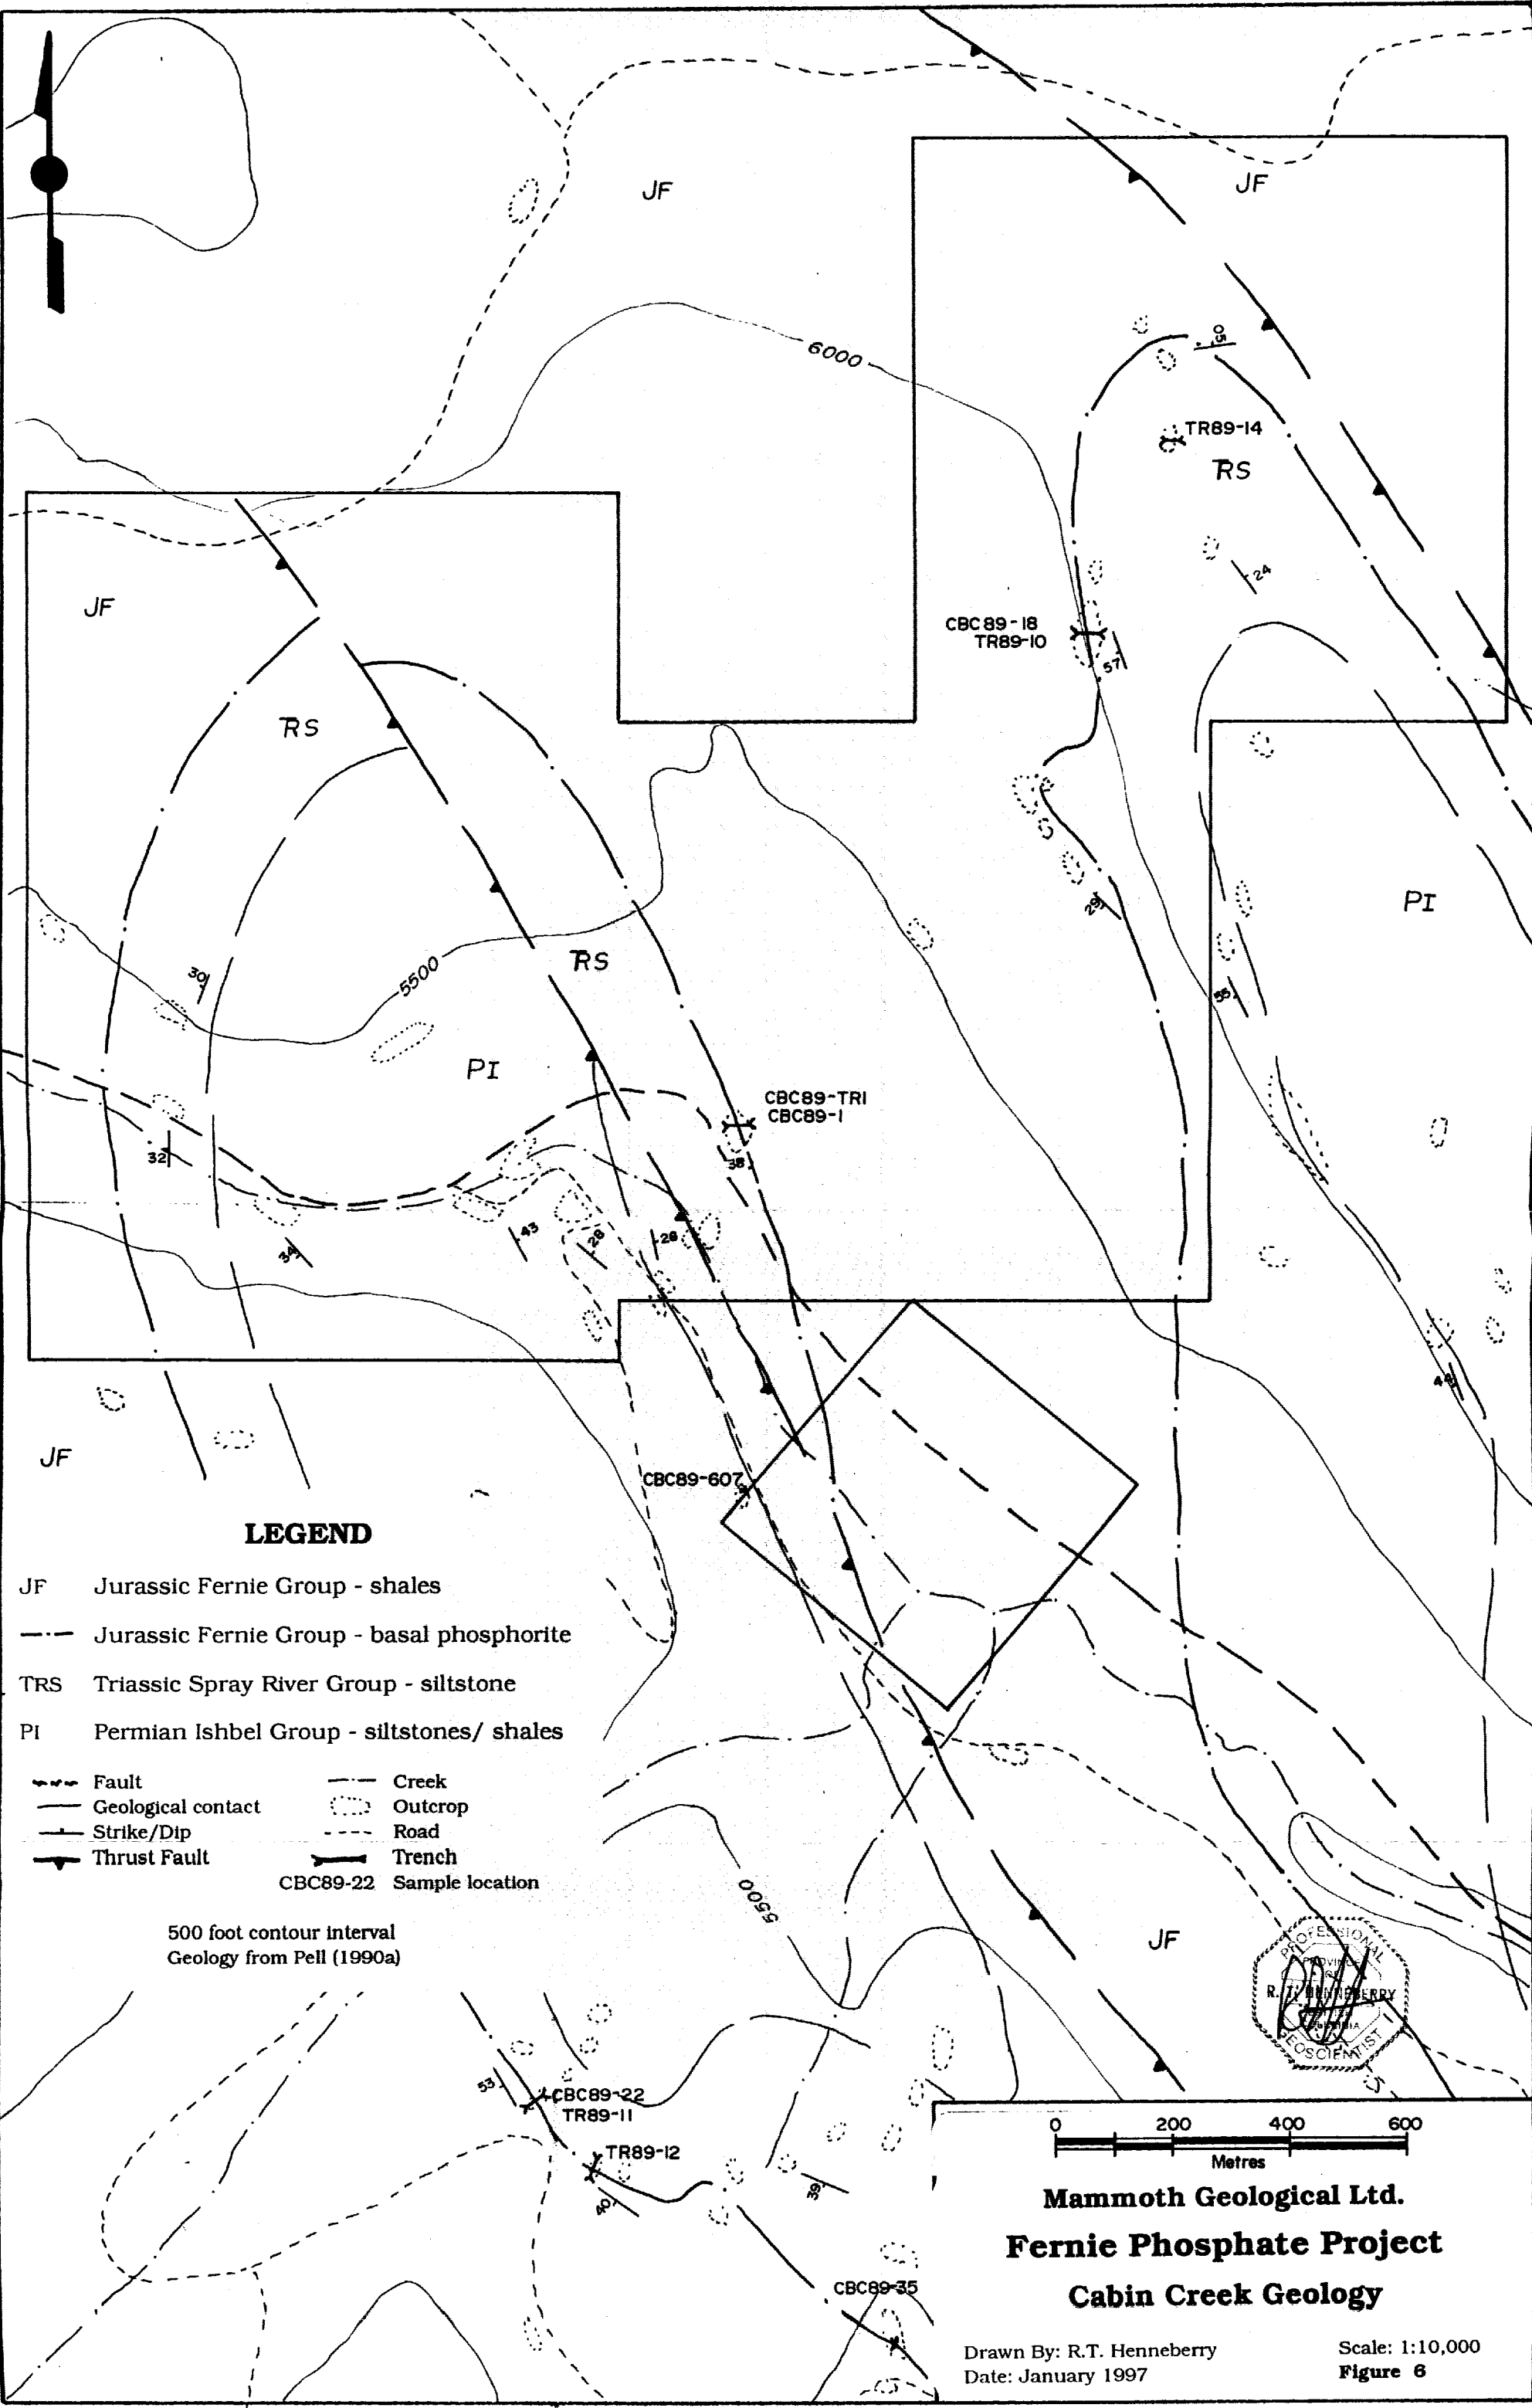

LEGEND

- JF Jurassic Fernie Group - shales
- Jurassic Fernie Group - basal phosphorite
- TRS Triassic Spray River Group - siltstone
- PI Permian Ishbel Group - siltstones/ shales
- Fault
- Geological contact
- Strike/Dip
- Thrust Fault
- Creek
- Outcrop
- Road
- Trench
- CBC89-22 Sample location


500 foot contour interval
Geology from Pell (1990a)



Mammoth Geological Ltd.
Fernie Phosphate Project
Cabin Creek Geology

Drawn By: R.T. Henneberry
Date: January 1997

Scale: 1:10,000
Figure 6

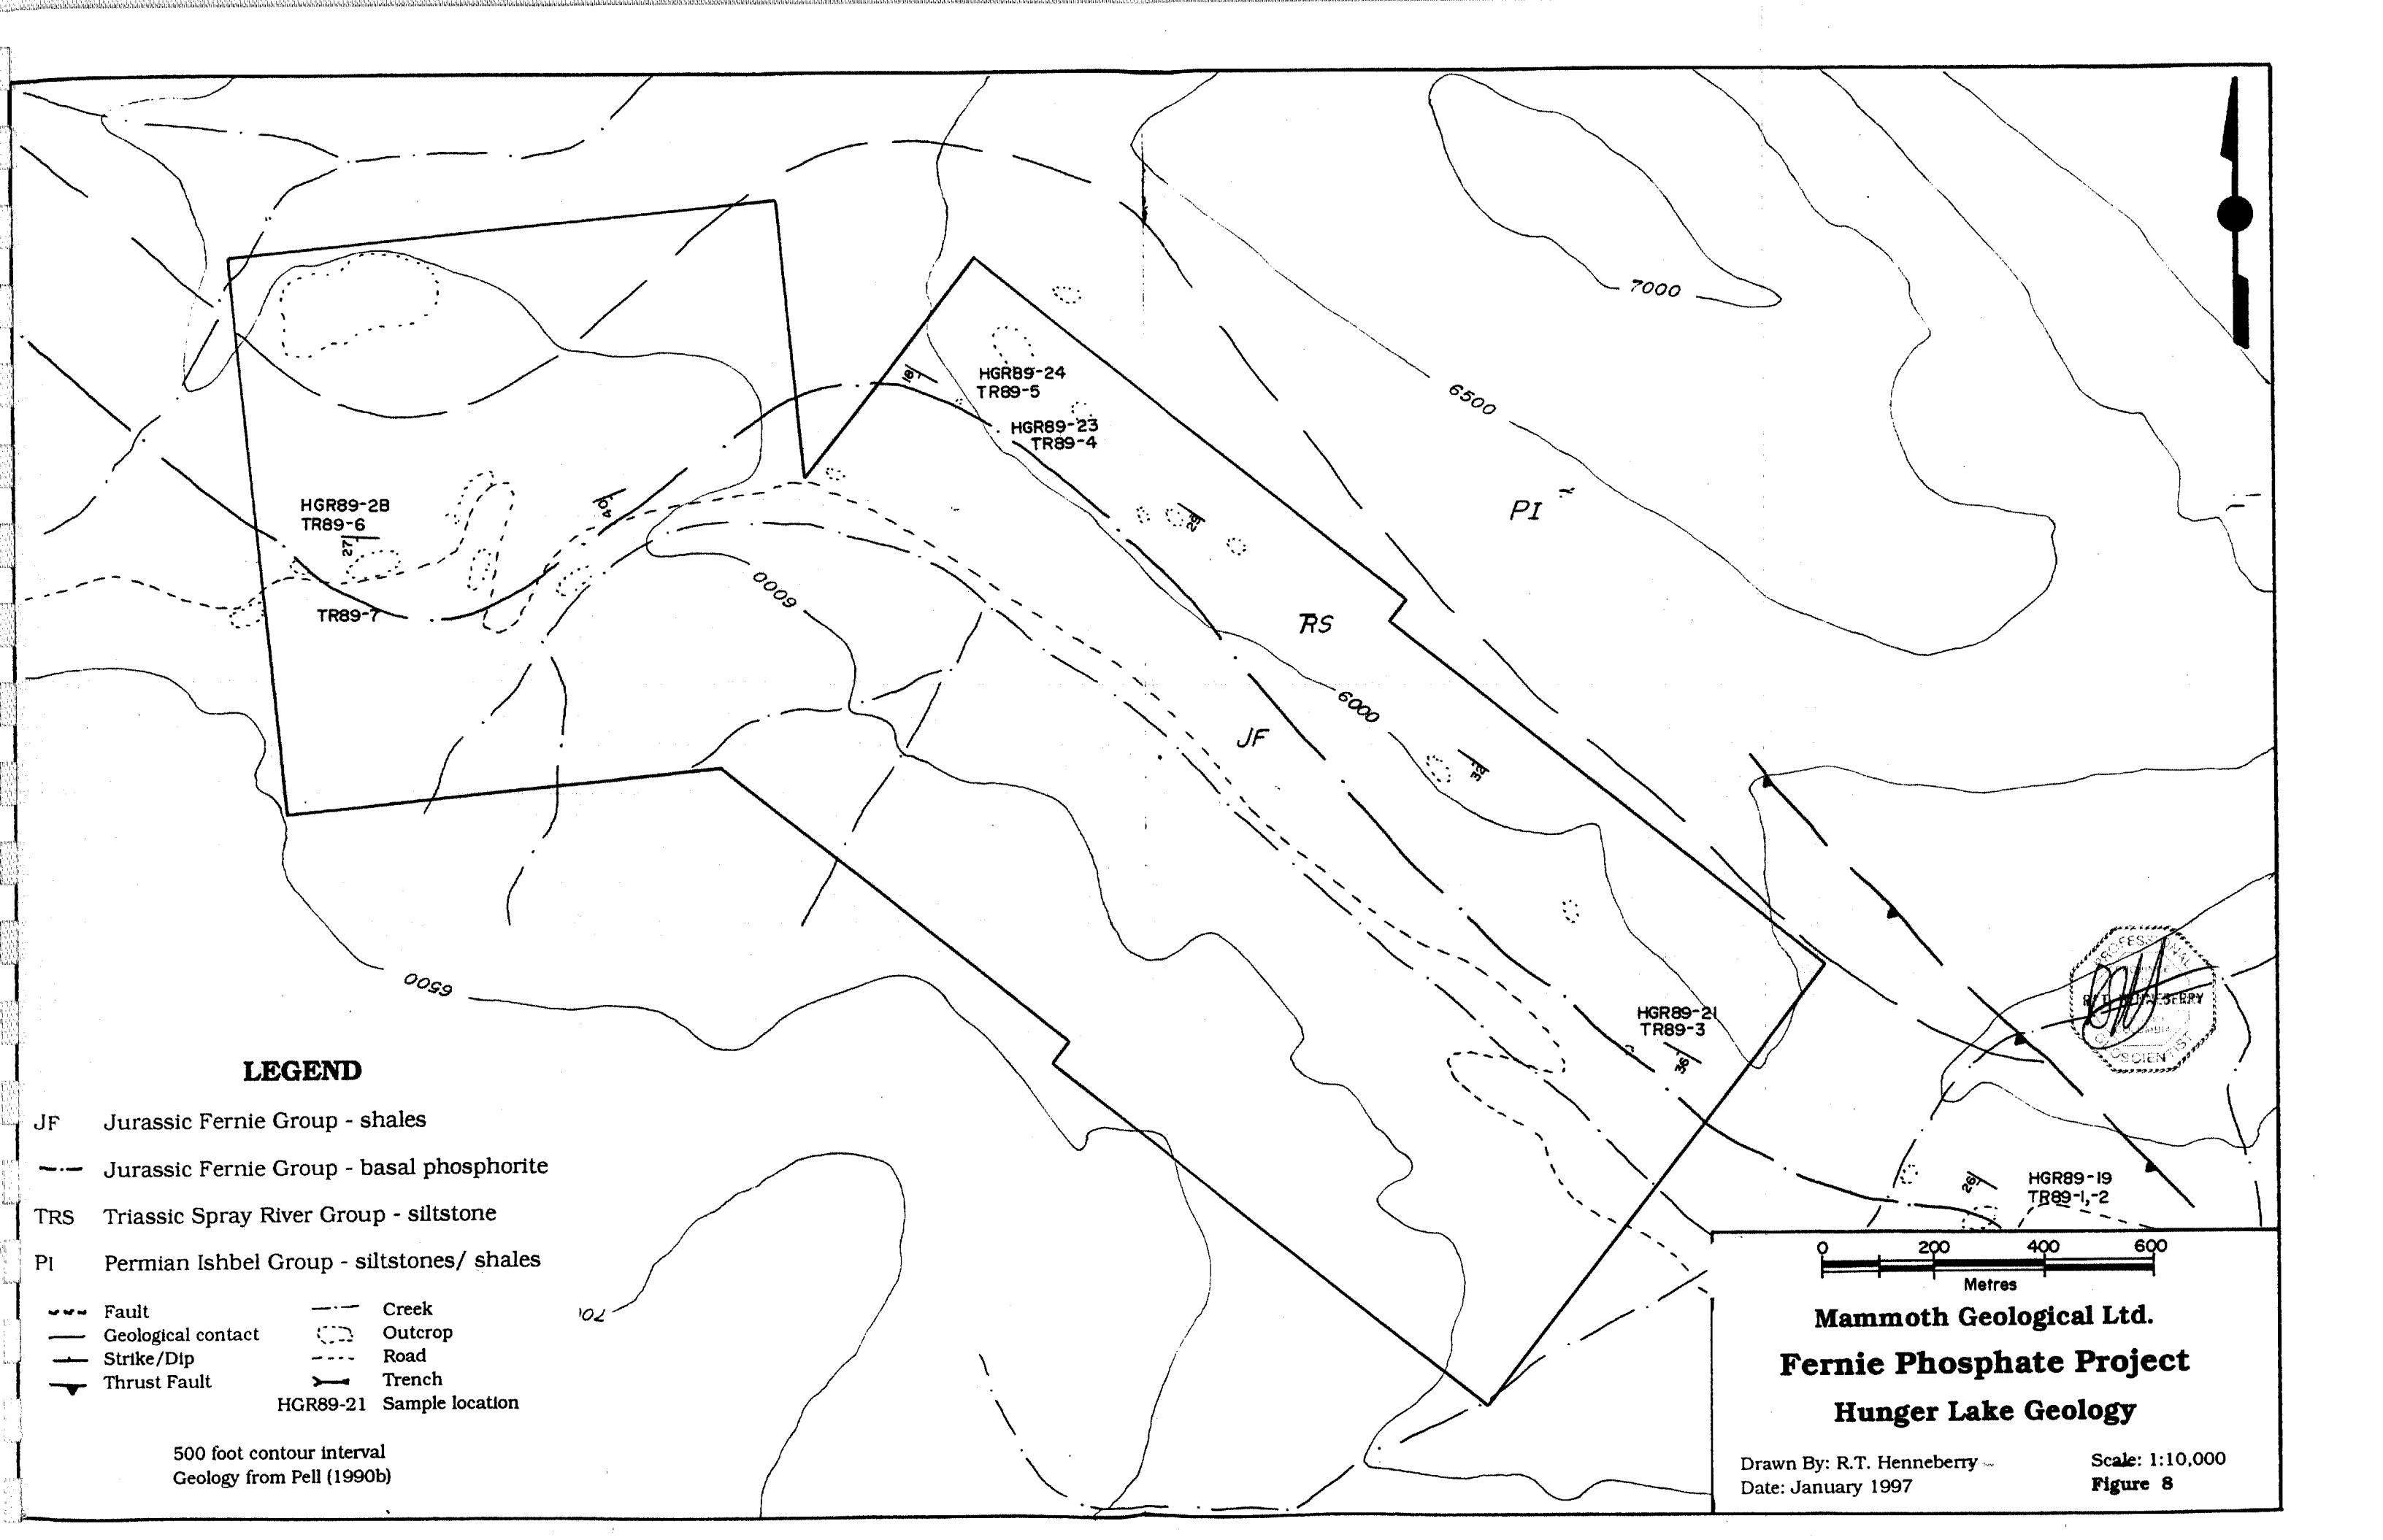

LEGEND

- JF Jurassic Fernie Group - shales
- Jurassic Fernie Group - basal phosphorite
- TRS Triassic Spray River Group - siltstone
- PI Permian Ishbel Group - siltstones/ shales
- Fault
- Geological contact
- Strike/Dip
- Thrust Fault
- Creek
- Outcrop
- Road
- Trench
- HGR89-21 Sample location

500 foot contour interval
Geology from Pell (1990b)



Mammoth Geological Ltd.
Fernie Phosphate Project
Hunger Lake Geology

Drawn By: R.T. Henneberry
Date: January 1997

Scale: 1:10,000
Figure 8