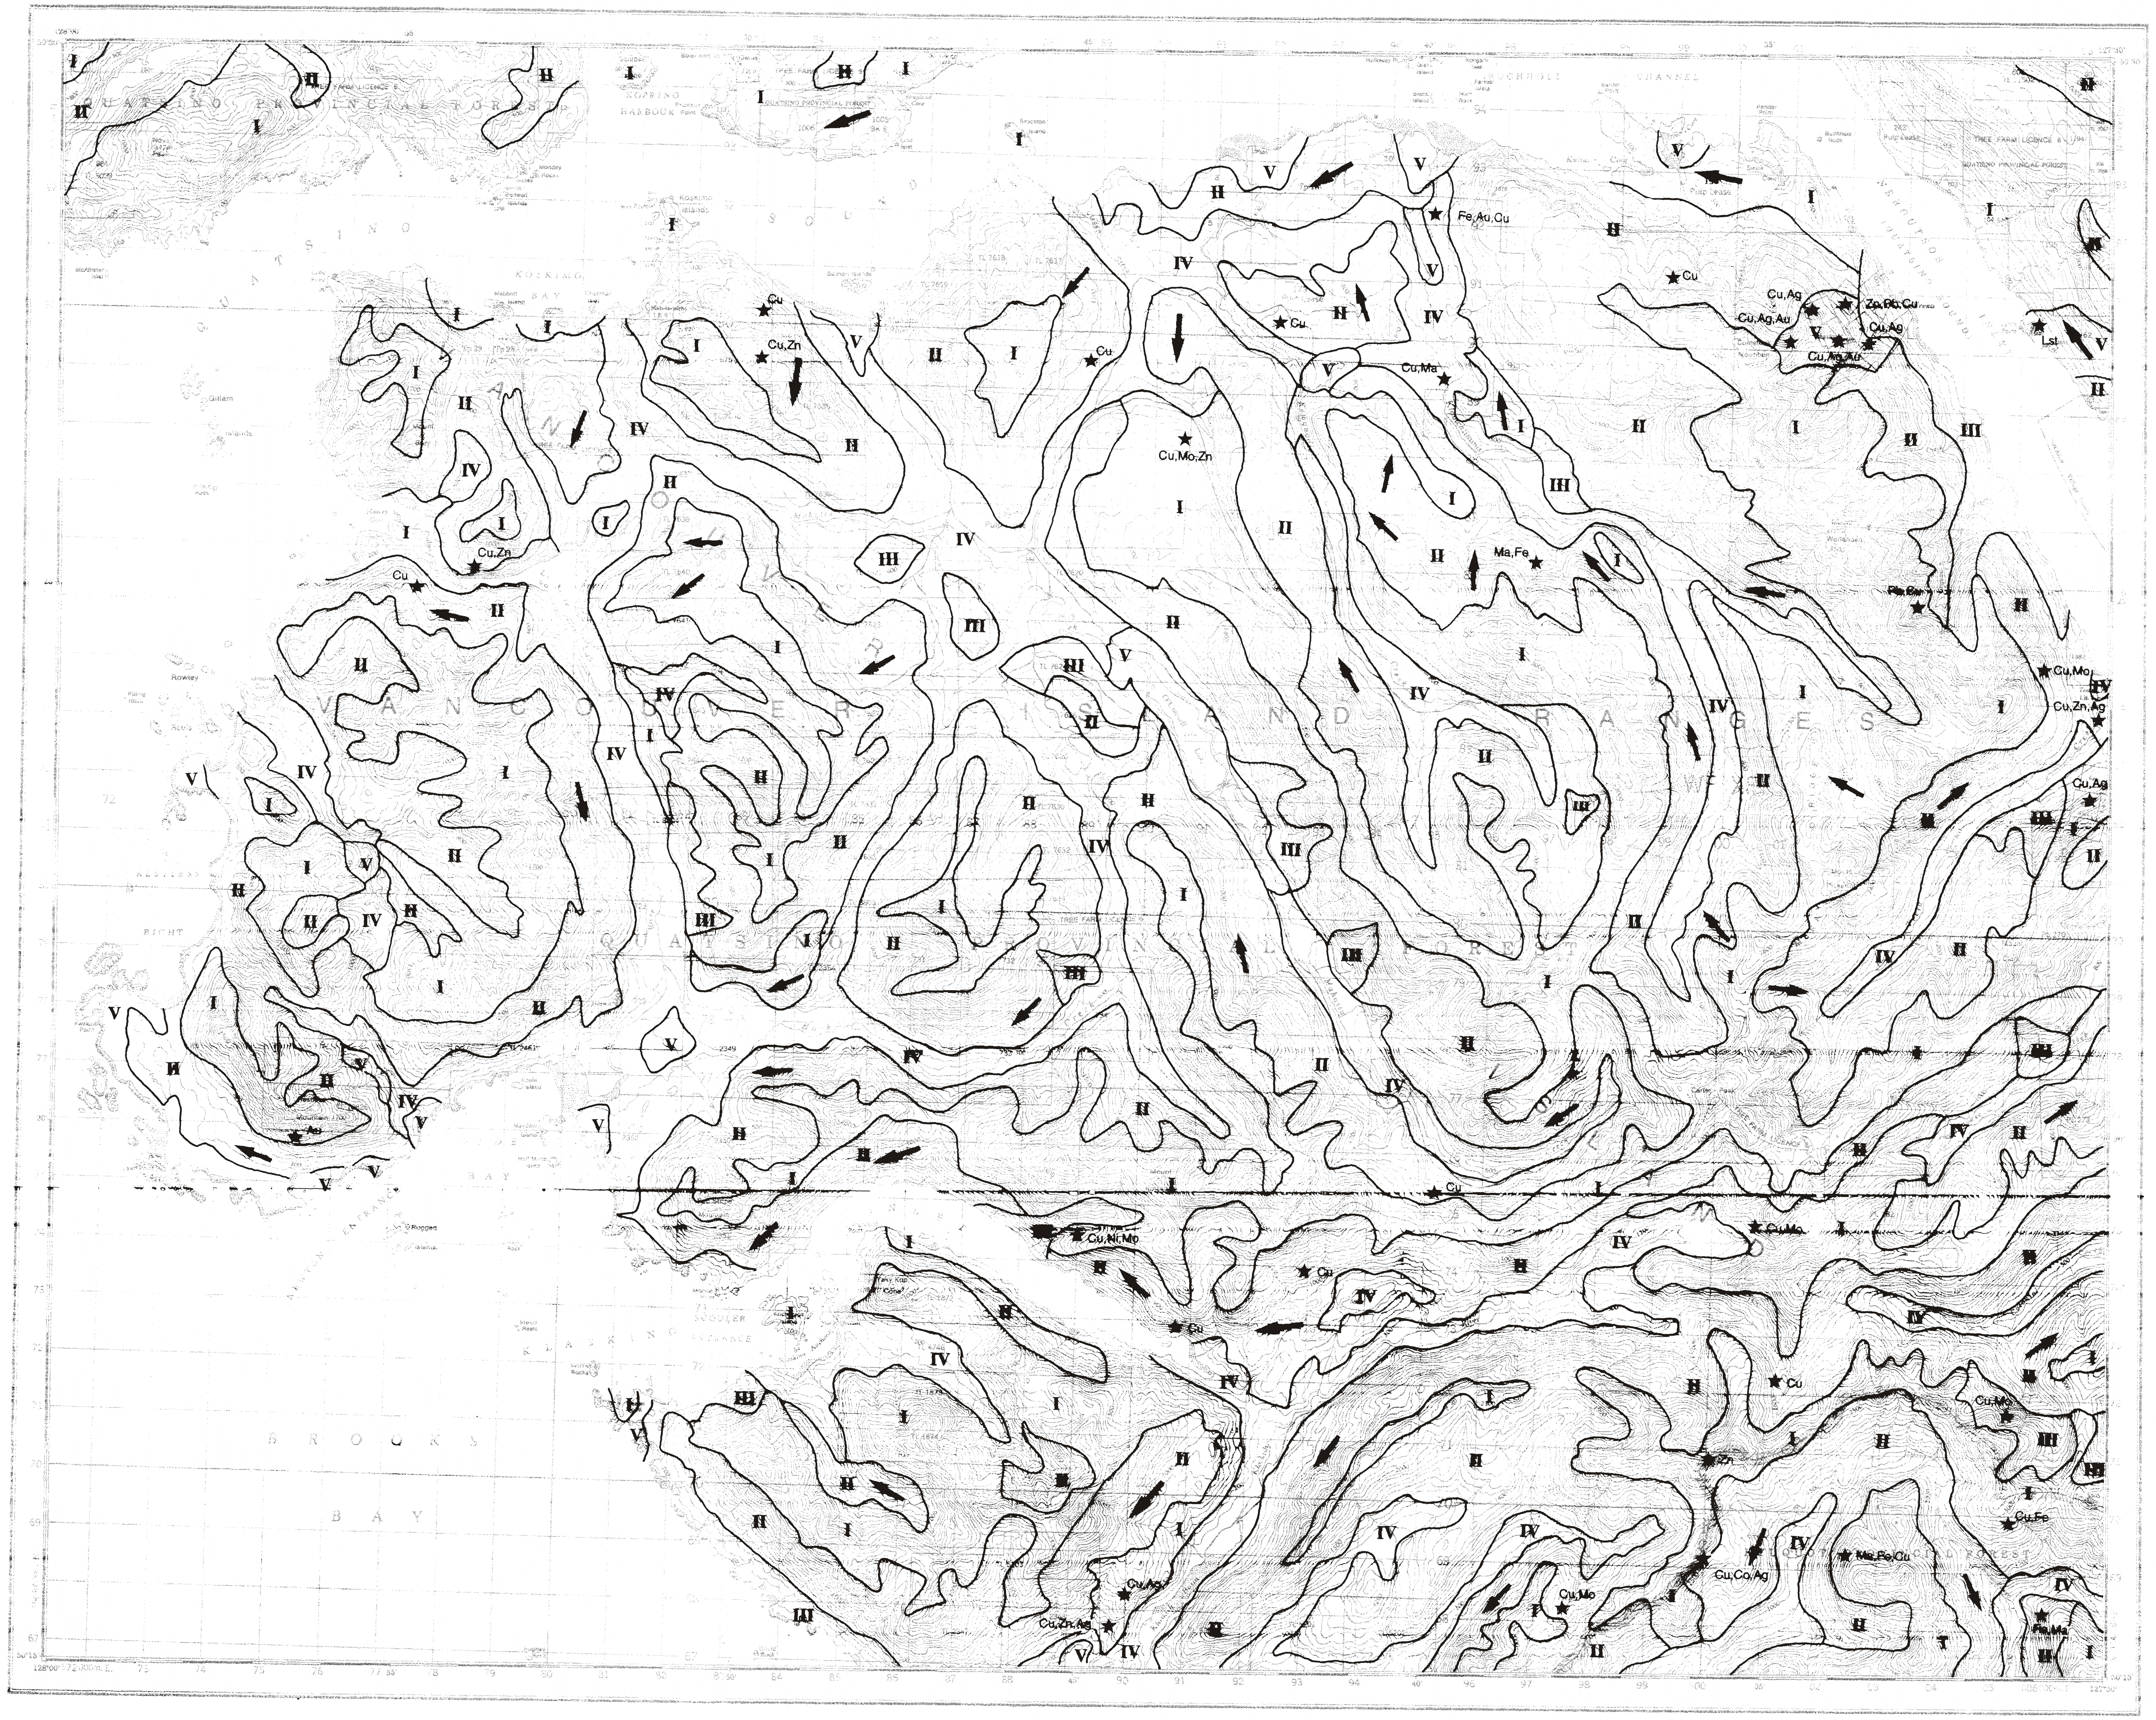

LEGEND

Rank	Description
I	**VERY HIGH APPLICABILITY (I)** Mv which is material deposited directly by actively moving or stagnating glaciers (various facies of till) or Cv which are materials produced by the rapid down-slope movement of dry, moist or saturated debris derived from surficial morainal material and/or bedrock falling, toppling, sliding or flowing. All unconsolidated sediments in this category occur as thin mantles of material which have no constructional form, but derive their surface expression from the topography of the underlying unit which is assumed to be bedrock. The sediments reflect minor irregularities of the underlying surface, are generally between 10 and 100 centimetres thick, and outcrops of bedrock are common.
II	**HIGH APPLICABILITY (II)** Mb which is material deposited directly by glaciers (various facies of till) or Cb which are materials produced by the rapid down-slope movement of dry, moist or saturated debris derived from surficial morainal material and/or bedrock falling, toppling, sliding or flowing. All unconsolidated sediments in this category occur as thick mantles of material which derive their surface expression from the topography of the underlying unit which is usually not bedrock. The sediments mask minor irregularities in the underlying unit and are generally greater than 1 metre thick.
III	**MODERATE APPLICABILITY (III)** Mv, Mb, Mh, Cv, Ca and Cb units same as above, either alone or in varying combinations, but underlying units are variable and not easy to verify or interpret. All unconsolidated sediments in this category occur as veneers or blankets, generally masking underlying topographic irregularities and total thickness is usually > 10 metres.
IV	**LOW APPLICABILITY (IV)** F^G are materials deposited in association with glacier ice; generally consisting of sand and gravel and sometimes showing evidence of ice melting. Sorting, stratification, texture and shape are variable; includes all types of outwash and ice-contact deposits. F are materials transported and deposited by rivers, alluvial materials; generally consisting of gravel, sand, silt and clay. Gravels are often well-rounded, contain interstitial sand, sediment is usually well-sorted and stratified, includes flood plain, terrace, deltaic, and some alluvial fan deposits.
V	**VERY LOW APPLICABILITY (V)** L are sediments deposited in lakes or reworked by wave action around lake shorelines; generally consist of stratified and well-sorted sand, silt and clay. L^G are lacustrine sediments that were deposited in lakes associated with glacier ice; generally consists of stratified and well-sorted sand, silt and clay. O are organic materials resulting from the decay of vegetative materials. W are sediments deposited by marine waters or reworked by wave action along marine shorelines; generally consisting of sorted and stratified gravel, sand, silt and clay.

MAP SYMBOLS

Symbol	Meaning
➡	Paleo-iceflow direction
★ Cu, Pb, Zn	Minfile occurrence

Facies Unit	Basal till Colluvium	Basal till Colluvium	Supraglacial till Morainal and Colluvial complexes	Glaciofluvial sediments Fluvial sediments	Glaciolacustrine sediments Marine sediments
Terrain Unit[a]	Mv Cv	Mb Cb Cv/M	Mh Mx Cx	FG F	LG W
Drift Thickness	< 1 m	> 1 m	< 10 m	< 10 m	< 10 m
Transport Distance	10s of metres	10s to 100s of metres	10s to 100s of metres	10s to 1000s of metres	10s to 1000s of metres
Derivative Phase	1st	1st	1st 2nd	2nd 3rd	3rd 4th
Drift Sampling Rank[b]	I	II	III	IV	V

a Terrain units (after Howes and Kenk, 1988): C - colluvium; M - till; FG - glaciofluvial sediment; LG - glaciolacustrine sediments; F - fluvial sediment; W - marine sediment; v - veneer (< 1 m); b - blanket (> 1 m); x - complex or combined units; h - hummocky.

b Drift Sampling Rank: I - very high; II - high; III - moderate; IV - low ; V - very low. Ranks refer to their applicability, or potential utility, for drift sampling based on: the type of facies and terrain unit; drift thickness and proximity of units to parent material or bedrock; transport distance and transport direction; derivative phase (*cf.* Shilts, 1993); and ease of data interpretation (*cf.* Proudfoot *et al.*, 1995).

BC

Province of British Columbia
Ministry of Energy, Mines
and Petroleum Resources

1895 - 1995
100
YEARS OF GEOLOGICAL SURVEYING

Geological Survey Branch

OPEN FILE 1995-18

DRIFT EXPLORATION APPLICABILITY OF THE MAHATTA CREEK AREA

NTS 92L/5

by D.H. Huntley and P.T. Bobrowsky

1:50 000

Miles 1 0 1 2 3 Miles
Metres 1000 0 1000 2000 3000 4000 Metres

For an overview of the Quaternary geology of the Mahatta Creek area please refer to the paper "Surficial Geology and Drift Exploration: Mahatta Creek Map Area (92L/5)" by D.H. Huntley and P.T. Bobrowsky; *in* Geological Fieldwork 1994, Grant, B. and Newell, J.M., Editors, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Paper 1995-1. Geology based partly on terrain map by A. Pattison (1979) and air photo interpretation followed by ground truthing at field stations indicated on map. Fieldwork completed in June 1994, with assistance by D. Brayshaw.

EXPLANATORY NOTES

This Drift Exploration Applicability map is an interpretive product of the terrain and surficial geology maps by Pattison (1979) and Huntley and Bobrowsky (1995) and follows the terrain classification system of Howes and Kenk (1988). The concept of sediment derivatives is adapted from Shilts (1993) and the full methodology is detailed in Proudfoot *et al.* (1995).

The purpose of this map is to assist explorationists to design sampling programs. In practice, the map should be consulted before fieldwork is undertaken, as it identifies types of surficial sediment and categorizes each according to the applicability for drift-related sampling. The sampling applicability of surficial deposits is ranked from very high to very low. Applicability refers to the proximity of the sample to parent material or bedrock as well as the ease of interpretation of the data; it does not refer to the likelihood of encountering mineralization. The map provides cost-effective information since areas which contain low-ranking deposits can be avoided during sampling. Similarly, areas of exploration interest can be prioritized according to the five categories and sampled sequentially as results from higher potential categories are evaluated first.

Several factors are used in the ranking of surficial deposits, including terrain unit, sediment thickness, transport distance (proximity to bedrock source), diagenesis (history of deposit from erosion to deposition), number of erosive/depositional phases, and ease of interpretation of analytical results. Geological data characterizing paleo-flow is also documented and illustrated to meet the purpose of the map. Collectively, these inter-related factors are used to categorize all surficial sediments identified on a traditional terrain map and generate a Drift Exploration Applicability map. This map should be used to develop a sampling strategy for various levels of drift prospecting. Specific bulk and clast sampling designs can be structured to fit changing project objectives which may rely on data comparisons between different facies. Analytical results can be confidently interpreted after which further action can be taken.

As summarized in the accompanying matrix, very high ranking (I) deposits include bedrock and colluvial veneers or morainal veneers which directly overlie bedrock. Such deposits are usually less than one metre in thickness, and are locally derived from bedrock within a few tens of metres. As a first derivative product, the history of the sediment and clasts since erosion is easily interpreted. Similarly, geochemical and pebble results are easy to interpret. The second category of highly ranked (II) deposits to sample consist of colluvial blankets over bedrock, colluvial veneers over moraine and morainal blankets. Colluvial blankets over bedrock differ from veneers over bedrock only in total thickness of the deposit (>1 m, but rarely > 3 m) since proximity to bedrock source is still in the order of tens of metres. Colluvial veneers over moraine are usually thin, so that the underlying diamicton can be sampled as a first derivative product. Transport distance is often in the order of tens of metres. Finally, morainal blankets, which normally consist of supraglacial and basal till facies, are good sediments to sample. Although sediment thickness often exceeds one metre, bedrock source is close, usually in the order of tens or hundreds of metres. As first derivative products, the transport history since erosion for the above three sediment associations is easily interpreted. Geochemical and clast analysis results obtained from this category are also easily interpreted.

Terrain units of moderate rank (III) include some first and second derivative products which consist of complex associations of colluvium and morainal sediments. Deposits are moderately thick, often in excess of ten metres and proximity to bedrock source can be tens to hundreds of metres. Interpretation of both the history of transportation and analytical results is generally moderately easy. Low ranked (IV) deposits consist of glaciofluvial and fluvial sediments. These second and third derivative products often overlie till or bedrock and can be of variable thickness. The added phase of transportation increases distance to bedrock source so that hundreds of metres are common although tens of metres are possible. Interpretation of the sediment history since initial bedrock erosion is difficult as is the interpretation of the analytical results. The final category represents the very low ranked deposits (V) consisting of glaciolacustrine, lacustrine, marine, organic and anthropogenic deposits. As these terrain units often overlie complex sequences of other sediments, total deposit thickness can be in excess of ten metres. The third and fourth derivative products in this category have very complex transport histories and, as such, distance to bedrock source can be kilometres, although short pathways as little as tens to hundreds of metres can be encountered. In many cases analytical results can be very difficult to interpret.

The general principles outlined here apply to all levels of mapping, however, the specifics and categories of the accompanying matrix will change depending on the scale of the map. The accompanying matrix applies only to 1:50 000 scale maps, so the matrix and principles of categorization can be applied to any other terrain map of a similar scale. One important aspect is knowledge of paleo-flow direction of the sampled sediment, whether pebble fabric data in till, cross-bedding in outwash or striae on underlying outcrop. Although some paleo-flow directions are illustrated, detailed paleo-flow must be determined at each station during sampling. Complex flow vectors result by compounding several cycles of transportation. For example, a down-slope component in colluvium may be overprinted upon an oblique ice flow direction found in the till. Because any number of compounded flow-vector paths can occur, generalizations on the shapes, size and orientations of geochemical and clast anomalies are inappropriate.

References

Howes, D.E. and Kenk, E. (1988): Terrain Classification System for British Columbia, Revised Edition; *B.C. Ministry of Environment, Lands and Parks*, MOE Manual 10.

Huntley, D.H. and Bobrowsky, P.T. (1995): Surficial Geology of the Mahatta Creek Area, NTS 92L/5; *B.C. Ministry of Energy, Mines and Petroleum Resources*, Open File 1995-11, 1:50 000 map.

Pattison, A. (1979): Terrain Geology of the Mahatta Creek area, NTS 92L/5; Ministry of Environment, Lands and Parks. 1:50 000 scale.

Proudfoot, D.N.P., Bobrowsky, P.T. and D.G. Meldrum (1995): Drift Exploration Potential Maps; *in* Drift Exploration in Mountainous Terrain, P.T. Bobrowsky, S.J. Sibbick, J. Newell and P.F. Matysek, Editors, *B.C. Ministry of Energy, Mines and Petroleum Resources*, Paper 1995-2.

Shilts, W.W. (1993): Geological Survey of Canada's Contributions to Understanding the Composition of Glacial Sediments; *Canadian Journal of Earth Sciences*, Volume 30, pages 333-353.