






#### British Columbia Geological Survey Open File 2014-08 Geoscience BC Map 2014-06-03

# Basal till potential of the Marmot Lake map area (NTS 093B/13), British Columbia

D. Sacco, T. Ferbey and W. Jackaman



Geology and data compilation by D. Sacco. Cartography by H. Arnold.

## SURFICIAL GEOLOGY

NOTE: Where map units are composed of multiple surficial materials, a compound map unit designator is used, separating more extensive materials from less extensive (e.g., for Tb.Tv, Tb is more extensive than Tv).

ORGANIC DEPOSITS: Largely saturated organic materials, consisting mainly of mosses, sedges, or other hydrophytic vegetation.

Undifferentiated organic deposits: Bogs, fens, and swamps; generally where shallow lakes have been infilled and in depressions along floodplains and abandoned meltwater

COLLUVIAL DEPOSITS: Materials deposited by direct gravity-induced movement; lithologic composition dependent on source material; typically poorly sorted, massive to crudely stratified

- Colluvial fan: Diamicton that spread out from an apex or form as a toe-slope apron with a surface gradient ≤ 15°.
- Colluvial veneer: Deposits less than 2 m thick that conform to underlying topography; typically on steep slopes.
- Colluvial blanket: Deposits greater than 2 m thick that mask subtle variations in substrate surface but generally conform to underlying topography; typically on steep slopes.
- GLACIOFLUVIAL DEPOSITS: Poorly sorted to well sorted sand and gravel transported and deposited directly by glacial meltwater.
- Glaciofluvial veneer: Deposits less than 2 m thick that conform to underlying topography
- GFb Glaciofluvial blanket: Deposits greater than 2 m thick that mask subtle variations in substrate surface but generally conform to underlying topography.
- GFc Ice-contact deposits: Stratified sand and gravel with minor diamicton deposited as hillocks
- GFr Eskers: Sinuous ridges of stratified sand and gravel deposited in subglacial, englacial, or

BASAL TILL DEPOSITS: Diamictons eroded, transported and deposited at the base of an active glacier. They are dense, massive and matrix supported. Matrix is typically composed of silt and clay with lesser amounts of sand. Clasts are often subangular to subrounded and can be faceted and

Till veneer: Deposits less than 2 m thick that conform to underlying topography; predominantly in upland regions with isolated bedrock exposures

- **Tb Till blanket:** Deposits greater than 2 m thick that mask subtle variations in substrate surface but generally conform to underlying topography; predominantly in areas of low relief.
- **Ts Streamlined till:** Flutings, drumlins, and the sediment (down ice) part of crag-and-tails.
- ABLATION TILL DEPOSITS: Diamictons deposited by melt out, commonly from stagnant ice, of fartravelled supraglacial and englacial material. These deposits lack the density of basal till and have a high percentage of matrix sand. May be stratified and include sorted sands and gravels.
- Undulating till: Loose, sandy diamicton commonly representing thinner deposits near the margins of widespread ice stagnation or in depressions where localized ice stagnation occurred. Consist of hillocks and hollows with slopes ≤ 15°.
- Hummocky till: Loose sandy diamicton commonly representing thicker deposits and widespread ice stagnation. Consist of hillocks and hollows with slopes ≥ 15°.

BEDROCK: Lithology varies greatly across the map area and includes sedimentary, metamorphic, volcanic, and intrusive rocks of Permian to Quaternary age. Outcrop is generally limited to areas of

Undifferentiated bedrock: High-angle slopes in upland areas or in incised meltwater channels; may be susceptible to rock fall; hummocky, or undulating expressions are the result of glacial or meltwater erosion, or preferential erosion due to structural weaknesses; streamlined bedrock is the result of glacial erosion.

FIELD STATIONS

BCGS OF 2014-15

GBC 2014-06-10

093G12

BCGS OF 2014-14 GBC 2014-06-09

093G05

093B12

BCGS OF 2014-13 BCGS OF 2014-12 GBC 2014-06-08 GBC 2014-06-07

BCGS OF 2014-10 BCGS OF 2014-11

GBC 2014-06-05 GBC 2014-06-06

BCGS OF 2014-09 BCGS OF 2014-08 GBC 2014-06-04 GBC 2014-06-03

BCGS OF 2014-06 BCGS OF 2014-07

GBC 2014-06-01 GBC 2014-06-02

093C16

093C09

O (Sacco et al., 2014)

## **TILL SAMPLES** (Labeled with sample number)

- Matrix geochemistry (Sacco et al., 2014)
- Matrix geochemistry and mineralogy (Sacco et al., 2014)


### MINERAL OCCURRENCES

Provincial MINFILE database (Labeled with name and MINFILE number) Producer

Showing

ICE-FLOW INDICATORS (Ferbey et al., 2013)

Unidirectional indicators **Bidirectional indicators** Drumlinoid or fluting

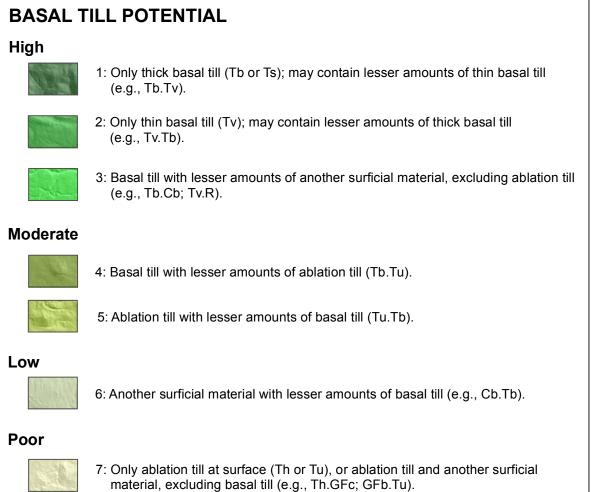

Sacco, D., Ferbey, T., and Jackaman, W., 2014. Basal till potential of the Marmot Lake map area (NTS 093B/13), British Columbia. British Columbia Ministry of Energy and Mines, British Columbia Geological Survey Open File 2014-08, Geoscience BC Map 2014-06-03, scale 1:50 000.

North American Datum 1983 Universal Transverse Mercator Zone 10 North Shuttle Radar Topography Mission (SRTM) DEM, 3, arcsecond (90 m) resolution

# **DESCRIPTIVE NOTES**

The Marmot Lake map area (NTS 093B/13) is in flat to gently rolling country of the Fraser Plateau, a subdivision of the Interior Plateau physiographic region. Mainly drift covered and by the Stikine terrane island-arc assemblage, which has high potential for mineralization such

Exploration and Knowledge (TREK) project. Initiated in 2013, this project applies modern geochemical and geophysical methods to better understand the geology and mineral deposits of the area (Clifford and Hart, 2014; Sacco et al., 2014). This work builds on previous studies in the Interior Plateau that focused on regional geological and geophysical investigations (Diakow et al., 1997) and developing exploration techniques specific to drift-covered areas (Levson and

The basal till potential map presented here is one of a series of 10 maps (see inset map) that were completed for the planning and implementation phases of the TREK geochemical program. Samples shown on these maps were collected for till matrix

Surficial sediment geochemical and mineralogical anomalies can be used to locate buried bedrock mineralization. Sediments with a relatively simple transport and depositional history, such as basal tills, extensive than the bedrock source (Levson, 2001). Glacial transport and deposition of basal till produces a

The purpose of this basal till potential map series is to

sampling programs, by identifying areas where basal till is most likely to occur. The maps identify areas where basal till samples can likely be collected and areas where sampling will be difficult or require different geochemical sampling protocols. Ice flow indicators compiled by Ferbey et al. (2013) are included in the maps to illustrate the general transport directions of


This mapping builds on earlier drift exploration potential maps developed by Proudfoot et al. (1995). Map unit definitions are based on conventions outlined by Deblonde et al. (2012). Map unit colours depict the potential occurrence of basal till; map unit labels include surficial materials and their topographic expression.

> Existing surficial geology, terrain, or soils and landform mapping data were reviewed and updated using digital air photo stereo-pairs in DAT/EM Summit Evolution photogrammetry software running in tandem with Esri ArcMap. New mapping emphasized the till facies best suited for geochemical and mineralogical analysis. We focused on distinguishing basal till (Figure 2) from ablation till (Figure 3) which, because of a more complex transport and depositional history, is illsuited for mineral exploration. This differentiation was based largely on interpretations of air photo stereo-pairs supplemented by sparse field data.

> Basal till is eroded, transported and deposited at the base of an active glacier. It typically has a subdued surface expression that either follows underlying topography (as a blanket or veneer) or is streamlined in the direction of ice flow. It is a dense, unsorted, massive, matrix-supported diamicton, with a matrix consisting mainly of silt and clay with lesser amounts of sand (Figure 3). Vertical joint and subhorizontal fissility intersections can give basal till a blocky appearance. Clasts are mostly gravel-sized and subangular to subrounded, and are commonly striated. The transport path of basal till is relatively simple and short and can be established by measuring the azimuth of ice-flow indicators, also produced in the subglacial environment. Multiple ice-flow events can, however, create a more complex transport path, highlighting the importance of ice-flow history reconstructions. Compared to

spatial and genetic association of basal till with other surficial materials and their depositional



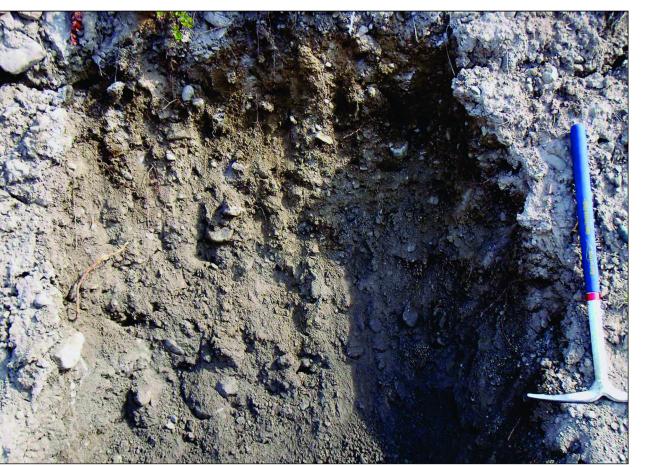

environments. It should be noted that appropriate sample material might be found in low

potential areas. For example, windows through an ablation till overlying a basal till, may be

High potential is assigned to units containing mainly basal till. The highest potential category

(1) includes till blankets (>2 m thick) and streamlined till with some till veneer (<2 m thick). In

these map units, samples can be collected from most exposures. In the second category of

high potential (2), basal till veneers are predominant and likely include some bedrock

exposures. In these areas, sample collection may be most productive down-ice from bedrock

outcrop, where till might be sufficiently thick to avoid post-depositional surface processes such

material, is unlikely to occur at surface in areas designated as 'none'.

as pedogenesis. High potential (3) map units are mostly basal till with lesser amounts of another surface material (excluding ablation till). Knowledge of the surface expression of this

Moderate potential is assigned to map units containing varying amounts of basal till and ablation till. These map units typically represent (4) thick basal till deposits in depressions or small valleys where ablation till has been deposited, or (5) near the margins of areally extensive ablation till map units where basal till may be found within a few metres of surface or in areas of higher elevation (i.e., where ablation till thins).

Low potential (6) is assigned to map units that are predominantly another surface material. These areas may include basal till deposits that are too small or discontinuous to resolve at the current map scale. Poor potential (7) is assigned where thick ablation till overlies basal till. These areas typically consist of hummocky ablation till and may include lesser amounts of another surficial material (e.g., ice-contact glaciofluvial deposits). These areas are still mapped as having basal till potential because exposures of sufficient depth could expose underlying

ACKNOWLEDGEMENTS L.B. Aspler and A.S. Hickin are thanked for their review of this map.

Surficial material other than till.

Clifford, A., and Hart, C.J.R., 2014. Targeting Resources through Exploration and Knowledge (TREK): Geoscience BC's newest minerals project, Interior Plateau Region, central British Columbia (NTS 093B, C, F, G). In: Geoscience BC Summary of Activities 2013, Geoscience BC, Report 2014-1, pp. 13-18.

Deblonde, C., Plouffe, A., É. Boisvert, Buller, G., Davenport, P., Everett, D., Huntley, D., Inglis, E., Kerr, D., Moore, A., Paradis, S.J., Parent, M., Smith, I.R., St. Onge, D., and Weatherston, A., 2012. Science language for an integrated Geological Survey of Canada data model for surficial geology maps, version 1.2. Geological Survey of Canada, Open File 7003, 224 p.

Diakow, L.J., van der Heyden, P., and Metcalfe, P., 1997. Introduction. In: Diakow, L.J., Newell, J.M. and Metcalfe, P. (Eds.). Interior Plateau Geoscience Project: summary of geological, geochemical, and geophysical studies, BC Ministry of Energy and Mines, British Columbia Geological Survey Paper 1997-2, Geological Survey of Canada, Open File 3448, pp.

Ferbey, T, Arnold, H., and Hickin, A.S., 2013. Ice-flow indicator compilation, British Columbia. British Columbia Ministry of Energy and Mines, British Columbia Geological Survey Open File 2013-06, 1:1 650 000 scale.

Holland, S.S., 1976. Landforms of British Columbia: a physiographic outline. British Columbia Ministry of Energy and Mines, and Petroleum Resources, British Columbia Geological Survey

Levson, V.M., 2001. Regional till geochemical surveys in the Canadian Cordillera: sample media, methods, and anomaly evaluation. In: McClenaghan, M.B., Bobrowsky, P.T., Hall, G.E.M. and Cook, S.J. (Eds.), Drift Exploration in Glaciated Terrain, Geological Society, Special Publication 185, pp. 45–68.

Levson, V.M., and Giles, T.R., 1997. Quaternary geology and till geochemistry studies in the Nechako and Fraser plateaus, central British Columbia (NTS 93 C/1, 8, 9, 10; F/2, 3, 7; L/16; M/1). In: Diakow, L.J., Newell, J.M. and Metcalfe, P. (Eds.), Interior Plateau Geoscience Project: summary of geological, geochemical, and geophysical studies, BC Ministry of Energy and Mines, British Columbia Geological Survey Paper 1997-2, Geological Survey of Canada, Open File 3448, pp. 121-145.

Logan, J.M., 2013. Porphyry systems of central and southern BC: an overview and field trip road log. In: Logan, J.M., and Schroeter, T.G. (Eds.), Porphyry systems of central and southern BC: tour of central BC porphyry deposits from Prince George to Princeton, Society of Economic

Terrain, Institution of Mining and Metallurgy, London, pp. 69–77.

Geologists, Guidebook Series 44, pp. 1-45. Miller, J.K., 1984. Model for clastic indicator trains in till. In: Prospecting in Areas of Glaciated

Proudfoot, D.N., Bobrowsky, P.T., and Meldrum, D.G., 1995. Drift exploration potential maps derived from terrain geology maps. In: Bobrowsky, P.T., Sibbick, S.J., Newell, J.M., and Matysek, P.F. (Eds.), Drift Exploration in the Canadian Cordillera, British Columbia Ministry of Energy and Mines, British Columbia Geological Survey Paper 1995-2, pp. 23-31.

Sacco, D.A., Jackaman, W., and Ferbey, T., 2014. Targeted geochemical and mineralogical surveys in the TREK Project area, central British Columbia (parts of NTS 093B, C, F, G). In:

Geoscience BC Summary of Activities 2013, Geoscience BC Report 2014-1, pp. 19–34.

Shilts, W., 1993. Geological Survey of Canada's contributions to understanding the composition of glacial sediments. Canadian Journal of Earth Sciences, 30, 333–353.


Giles, 1997).

as calc-alkalic Cu-Mo±Au and alkaline Cu-Au porphyries (Logan, 2013). Current work in the Marmot Lake map area is part of Geoscience BC's Targeting Resources for

geochemical and mineralogical analysis; results will be released in future publications.

are better suited for mineral exploration. Basal till is ideal for assessing mineral potential because: 1) it is a common sediment in glaciated terrain; 2) it can be considered a first derivative of bedrock (Shilts, 1993) LONGITUDINAL SECTION and therefore has a similar geochemical signature to its bedrock source; 3) its transport history can be determined by local ice-flow reconstructions; and 4) it produces a geochemical signature that is areally more dispersal train, elongated down ice from its parent rock

assist in the design of exploration projects, and to guide surficial sediment geochemistry and mineralogy

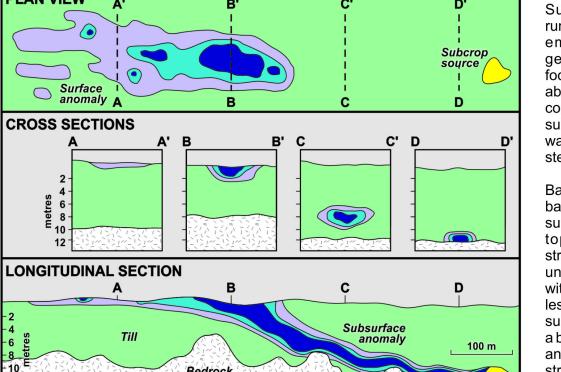

ICE-FLOW DIRECTION

Figure 1. Model of clastic dispersal in basal till (modified from Miller, 1984). Highest values (dark blue) define the head of a dispersal train at surface, and decrease exponentially in the down-ice direction (light purple). Note how the head of a dispersal train is offset, in the downbasal till, the transport distance of ablation till is longer and the depositional history more complex. Ablation till consists of material transported within and on top of a glacier. It is blocks produces an irregular, undulating to hummocky topography. Ablation till is a less compact diamicton. It contains more gravel and has a sandier matrix (Figure 4). It can be massive to crudely stratified and may contain lenses of sorted sand and gravel. Formed by ice downwasting during deglaciation, ablation tills are typically exposed at the surface and can

Each mapped till unit is assigned a basal till potential rating. This is assignment is based on the

Figure 3. Ablation till exposed in road cut (65 cm pick for scale both photos). There is a higher percentage of sand and gravel, compared to a typical basal till (see Figure 2), and lower density.